


**JOURNAL OF SYSTEM AND MANAGEMENT SCIENCES**

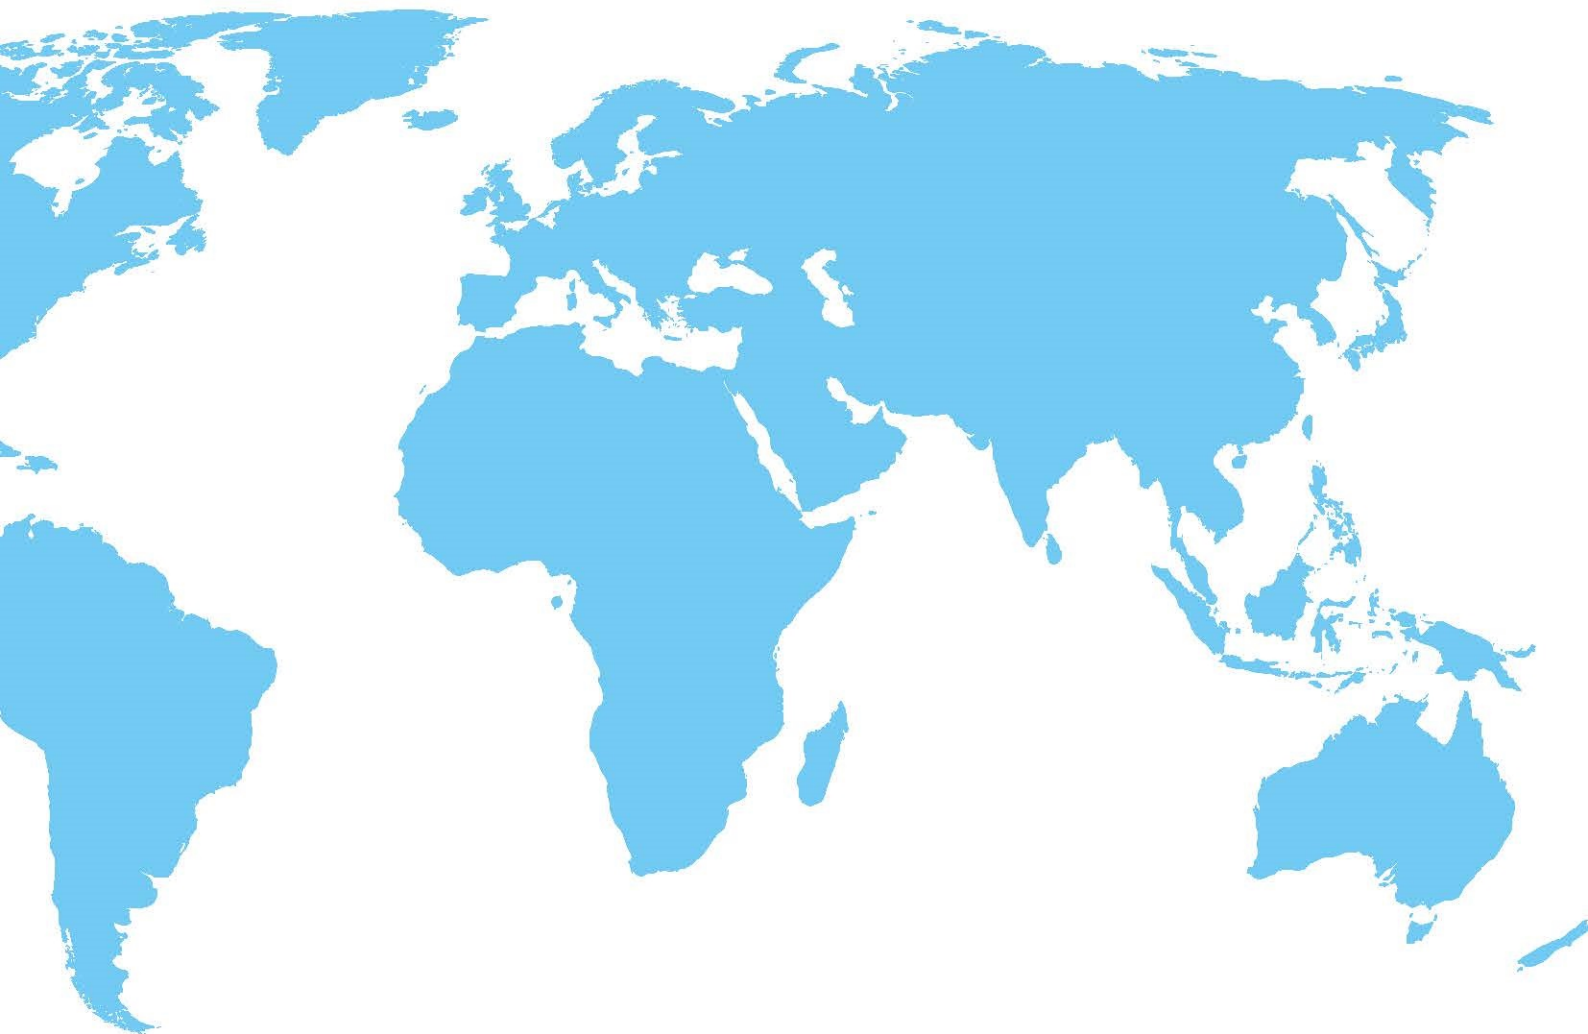

# Journal of System and Management Sciences

---A Peer-reviewed Journal Sponsored by [Beijing Jiaotong University](#), ISSN:1816-6075(Print)  
1818-0523(Online)

[Home](#) [About](#) [Submissions](#) [Publication Ethics](#) [Editorial Board](#) [Current](#) [Archives](#) [Contact](#)



ISSN: 1816-6075(Print)ISSN: 1818-0523(Online)  
Editor in Chief: Prof. Zhenji Zhang

**Editor-in-Chief:** Prof. Dr. Zhenji ZHANG  
Email: [zhjzhang@bjtu.edu.cn](mailto:zhjzhang@bjtu.edu.cn)  
Professor, PhD  
School of Economics and Management,  
Beijing Jiaotong University, China

**Managing Editor:** [Dr. Mincong Tang](#) (Beijing Jiaotong University)

## Editorial Board:

Prof. Dr. Andrea Benedetto  
Email: [andrea.benedetto@uniroma3.it](mailto:andrea.benedetto@uniroma3.it)  
Engineering Faculty, University of Roma TRE, Italy

Prof. Dr. Bernhard Bauer  
Email: [bernhard.bauer@informatik.uni-augsburg.de](mailto:bernhard.bauer@informatik.uni-augsburg.de)  
Department of Computer Science at the University of Augsburg, Germany

Prof. Carlos Rodríguez-Monroy  
Email: [crmonroy@etsii.upm.es](mailto:crmonroy@etsii.upm.es)  
Department of Business Administration, Univesridad Politécnica de Madrid, Spain

Prof. Dr. Dimitris Karagiannis  
Email: [dk@dke.univie.ac.at](mailto:dk@dke.univie.ac.at)  
Department of Knowledge and Business Engineering, University of Vienna, Austria

Prof. Ezendu Ariwa  
Email: [e.ariwa@londonmet.ac.uk](mailto:e.ariwa@londonmet.ac.uk)  
London Metropolitan Business School, the London Metropolitan University, Great Britain

Prof. Florin G. Filip  
Email: [ffilip@acad.ro](mailto:ffilip@acad.ro)  
Romanian Academy, Bucharest, Romania

Prof. Dr. Honglu Liu  
Email: [hliu@bjtu.edu.cn](mailto:hliu@bjtu.edu.cn)  
School of Traffic and Transportation, Beijing Jiaotong University, China

Prof. Dr. Ioan Dzitac  
E-mail: [rector@univagora.ro](mailto:rector@univagora.ro)  
Agora University, Oradea, Romania

Prof John Roddick  
Email: [john.roddick@flinders.edu.au](mailto:john.roddick@flinders.edu.au)  
School of Computer Science, Engineering and Mathematics, Flinders University, Australia

Prof. Jose M Sallan,  
Email: [jose.maria.sallan@upc.edu](mailto:jose.maria.sallan@upc.edu)  
Department of Management, Universitat Politècnica de Catalunya, Spain

Prof. Jose L Salmerón  
Email: [salmeron@acm.org](mailto:salmeron@acm.org)  
Department of Business and Marketing, University Pablo de Olavide, Spain

Prof. Juan A Marín-García  
Email: [jamarin@omp.upv.es](mailto:jamarin@omp.upv.es)  
Group ROGLE, Universidad Politécnica de Valencia, Spain

Prof. Juan Trujillo  
Email: [jtrujillo@dlsi.ua.es](mailto:jtrujillo@dlsi.ua.es)  
Department of Software and Computing Systems, University of Alicante, Spain

Prof. Dr. Jurgita Raudeliuniene  
Email: [jurgita.raudeliuniene@leu.lt](mailto:jurgita.raudeliuniene@leu.lt)  
Department of Business Technologies and Entrepreneurship, Vilnius Gediminas Technical University | VGTU · Lithuania

Prof. Kap Hwan Kim,  
Email: [kapkim@pusan.ac.kr](mailto:kapkim@pusan.ac.kr)  
Logistics Systems Laboratory Lab, Pusan University, Korea

Prof. Kamil Dimililer  
Email: [kdimililer@neu.edu.tr](mailto:kdimililer@neu.edu.tr)  
Department of Electrical & Electronic Engineering, Near East University, Turkey

JOURNAL OF SYSTEM AND MANAGEMENT SCIENCES



Published by Success Culture Press

Prof. Dr. Lech Madeyski  
URL: <http://madeyski.e-informatyka.pl/>  
Institute of Informatics, Wroclaw University of Technology, Poland

Prof. Leszek A. Maciaszek  
Email: [leszek.maciaszek@ue.wroc.pl](mailto:leszek.maciaszek@ue.wroc.pl)  
Department of MIS Engineering, University of Economics, Poland

Prof. Dr. Michael E. Auer  
Email: [M.Auer@IEEE.org](mailto:M.Auer@IEEE.org)  
School of Systems Engineering, Carinthia University of Applied Sciences, Austria

Dr. Paolo Napoletano  
Email: [pnapoletano@unisa.it](mailto:pnapoletano@unisa.it)  
Department of Information and Electrical Engineering, University of Salerno, Italy

Prof. Pep Simo  
Email: [pep.simo@upc.edu](mailto:pep.simo@upc.edu)  
Department of Management, Universitat Politècnica de Catalunya, Spain

Prof. Dr. Runtong Zhang,  
Email: [rtzhang@bjtu.edu.cn](mailto:rtzhang@bjtu.edu.cn)  
Department of Information Management, Beijing Jiaotong University, China

Prof. Dr. Shifeng Liu  
Email: [shfliu@bjtu.edu.cn](mailto:shfliu@bjtu.edu.cn)  
Department of Information Management, Beijing Jiaotong University, China

Prof. Dr. Simon X. Yang  
Email: [syang@uoguelph.ca](mailto:syang@uoguelph.ca)  
School of Engineering, University of Guelph, Canada

Prof. Sven Hartmann  
Email: [sven.hartmann@tu-clausthal.de](mailto:sven.hartmann@tu-clausthal.de)  
Department of Informatics, Clausthal University of Technology, Germany

Prof. Sohail S. Chaudhry  
Email: [sohail.chaudhry@villanova.edu](mailto:sohail.chaudhry@villanova.edu)  
Department of Management and Operations/International Business, Villanova School of Business, Villanova University, U.S.A.

Prof. Vicenc Fernandez  
Email: [vicenc.fernandez@upc.edu](mailto:vicenc.fernandez@upc.edu)  
Department of Management, Universitat Politècnica de Catalunya (UPC), Spain

Prof. Dr. Vlado Glavinic  
Email: [vlado.glavinic@fer.hr](mailto:vlado.glavinic@fer.hr)  
Faculty of Electrical Engineering and Computing, University of Zagreb, Croatia

Prof. Dr. Yinan Qi  
Email: [yinanqi@gmail.com](mailto:yinanqi@gmail.com)  
International Business School, The University of International Business & Economics, Beijing, China

---

Copyright © Asia Association of System and Management Research (AASMR). All rights reserved

# Journal of System and Management Sciences

---A Peer-reviewed Journal Sponsored by [Beijing Jiaotong University](#), ISSN:1816-6075(Print)  
1818-0523(Online)

[Home](#)   [About](#)   [Submissions](#)   [Editorial Board](#)   [Current](#)   [Archives](#)   [Contact](#)

---

**Journal of System and Management Sciences --- Vol.4, No. 4, 2014**

**Table of Contents (released on Dec 31, 2014)**

[Effect of Two Imperfect Key Production Subsystems on the Optimal Number of Production Cycles.....1](#)

Authors: The Jin Ai, Ririn Diar Astanti, Agustinus Gatot Bintoro, Slamet Setio Wigati, Dah-Chuan Gong, Gary C. Lin

[The Impact of FDI on Chinese Industries and Our Coping Strategies.....19](#)

Author: Shuqing Huang

[Optimizing Production Scheduling Using Genetic Algorithm in Textile Factory.....27](#)

Authors: Harwin Kurniawan, Tanika D. Sofianti, Aditya Tirta Pratama and Prianggada Indra Tanaya

[Study on Spatial Characteristic and Tourism Industry Cluster in Capital Region of China.....45](#)

Authors: He Ying, Yin Ping and Yuan Yuan

[Research on Commodity Collaborative Logistics Service System under E-commerce Environment.....61](#)

Authors: Bingwu Liu, Hua Hui and Juntao Li

## **Effect of two imperfect key production subsystems on the optimal number of production cycles**

The Jin Ai<sup>1</sup>, Ririn Diar Astanti<sup>1</sup>, Agustinus Gatot Bintoro<sup>1</sup>,  
Slamet Setio Wigati<sup>1</sup>, Dah-Chuan Gong<sup>2</sup>, Gary C. Lin<sup>3</sup>

<sup>1</sup> Department of Industrial Engineering, Universitas Atma Jaya Yogyakarta, Yogyakarta,  
Indonesia

<sup>2</sup> Department of Industrial and System Engineering, Chung Yuan Christian University, Chung-Li,  
Taiwan, R.O.C.

<sup>3</sup> Department of Industrial & Manufacturing Engineering & Technology, Bradley University,  
Peoria, U.S.A.

*jinai@mail.uajy.ac.id*

*(Received Aug 2014, accepted Nov 2014)*

**Abstract.** This paper studies the effect of two imperfect key production subsystems (KPS) on the optimal number of production cycles where a product is to be manufactured in batches on a production system over a finite planning horizon. During a production run of the product, the two imperfect KPS may shift from an in-control to an out-of-control state due to three independent sources of shocks. A shock from source 1, 2, and 3 causes the shift on the first KPS, the second KPS, and both KPS's, respectively. Each shocks occur at random time  $U_1$ ,  $U_2$ , and  $U_3$  following exponential distribution with mean  $1/\lambda_1$ ,  $1/\lambda_2$ , and  $1/\lambda_3$ , respectively. After each individual shocks, consequently, the production system will produced some defective items with different rates. Three different schemes of defectives rates are considered here which are constant, linear increasing function of time, and exponential increasing function of time. For each scheme, a mathematical model describing the situation is developed in order to determine a number of production cycles that minimizes the expected total cost per unit time including setup, inventory carrying, and defective costs. Solution approach of finding optimal solution of the models is provided, together with some numerical examples.

**Keywords:** Production lot sizing, Economic production quantity, Finite planning horizon, Imperfect production system, Shock model

---

## **1. Introduction**

The problem considered here is a variant of classical Economic Production Quantity (EPQ) problem where a product is to be manufactured in batches on an imperfect production system over a finite planning horizon, in which the production system consists of two imperfect key production subsystems (KPS). This work has twofold motivations that are practical and theoretical aspects. In the practical aspect, it is common that the production system is imperfect and has two key production systems in it. In addition, the product life cycle tends to be shorter. Therefore, it is important to address the EPQ on imperfect production system over finite planning horizon problem.

In the theoretical aspect, although some EPQ on imperfect production system models have been proposed before, this problem never been discussed before. Most of the models considered production system with single KPS only. The initial work of Rosenblatt and Lee (1986b) developed an EPQ model with an imperfect production process where the production process may shift at a random point in time from an in-control state to an out-of-control state during a production run, in which the time-to-shift is an exponentially distributed random variable and a fixed portion of items produced become defective after the process has shifted. After this work, several models dealt with various additional system setting, although still subject to single KPS only. Since the model proposed in this paper can be viewed as an extension of their model, a review of results related to Rosenblatt and Lee's model is provided below.

Inspection schedule is one of the additional system setting that was included in the model. Lee and Rosenblatt (1987) started to consider it by including a periodic inspection schedules into the model proposed in Rosenblatt and Lee (1986b). Furthermore, Rosenblatt and Lee (1986a) compared a continuous inspection schedule and a periodic inspection schedule. After that, Lee and Rosenblatt (1988) investigated different policies of providing process inspection and restoration capabilities in reducing the defective cost. Later, Lee and Rosenblatt (1989) studied a model with an equal-spaced inspection schedule and a restoration cost as a function of detection delay. Additional system settings related to inspection that had been considered are the reworking cost before sale and the warranty cost after sale (Lee & Park, 1991), increasing failure rate function (Lin, Tseng & Liou, 1991), impact of inspection errors (Liou, Tseng & Lin, 1994; Ben-Daya, 1999), inspection times that is discrete or continuous (Makis, 1998), partial inspection policy (Wang & Sheu, 2001), and the joint effects of maintenance policy by inspection and the production-inventory system, including raw materials on the cost of operating a single

facility (Lin, Chen & Kroll, 2003).

Various EPQ models of imperfect production system proposed in the past also included a range of time-to-shift distribution. While Rosenblatt and Lee (1986b) used exponential time-to-shift distribution, many other research used different distribution such as a function of production rate (Khouja & Mehrez, 1994), general distribution (Hariga & Ben-Daya, 1998; Giri & Dohi, 2007), and arbitrary distribution (Kim & Hong, 1999).

The others additional additional system setting that was included in the EPQ models of imperfect production system are backorders and variable leadtime (Ouyang & Chang, 2000), allowable shortage (Chung & Hou, 2003), and standby key modules (Hsieh & Lee, 2005).

Recent research in this area are filled with more complex problem settings and to be integrated with other area of production system. Hou and Lin (2005) studied a model where defective items are also generated even the production process is in the in-control state. Ben-Daya, Noman, and Hariga (2006) investigated integrated inventory inspection models with and without replacement of nonconforming items with a deterministic demand. Lin and Lin (2007) developed models for an imperfect production system in order to deal with situations regarding whether and when a screening process is implemented with scraps and no shortages. Huang, Lo, and Ho (2008) designed an effective inspection schema for imperfect production systems. Ben-Daya and Noman (2008) developed integrated inventory inspection models with and without replacement of nonconforming items for stochastic demand. Chakraborty, Giri, and Chaudhuri (2009) investigated the joint effect of a process shift, a machine breakdown and inspections on lot sizing decisions for an imperfect production system under two inspection policies. Wang and Tsai (2012) proposed a heuristic inspection policy for materials and products. They first obtained the inspection range for the input material without considering product inspection, and then determined the product inspection range based on the obtained range of the input material inspection.

In contrast with previous models which is considered production system with single KPS only, Lin and Gong (2011) recently studied an EPQ model where the production system is imperfect and dictated by two imperfect KPS's over an infinite planning horizon. They proposed a model that minimizes the total production cost including cost of setup, inventory carrying, and quality. In their model, the two imperfect KPS may shift from an in-control to an out-of-control state due to three independent sources of shocks. When at least one KPS on out-of-control state, consequently, the production system will produce some

defective items with fixed but different rates. Their model then can be considered as an extension of Rosenblatt and Lee (1986b) model in terms of number of KPS. Ai et al. (2013) proposed three approaches for solving the fixed defective rates model. In this paper, instead of infinite planning horizon, we consider the finite planning horizon. Furthermore, the model is extended to two cases where defective rates become a linear function and an exponential function of time.

In the next section, we propose a basic mathematical model where the defective rates are constant after the production system has shifted into various out-of-control states. A solution approach is developed to obtain a optimal solution of the number of production cycles. Then, the basic model is extended to two cases where defective rates become a linear function or an exponential function of time. Numerical examples and results are also provided to illustrate the effectiveness of the proposed solution approach. Finally, concluding remarks are given along with some future research directions.

## **2. Problem Definition and Mathematical Model**

The basic problem considered here is a variant of classical Economic Production Quantity (EPQ) problem where a product is to be manufactured in batches on an imperfect production system over a finite planning horizon ( $H$ ). The demand rate of the product ( $d$ ) is constant. During a production run of the product at the constant rate  $p$ , the machine is dictated by two unreliable key production subsystems (KPS's). We assume that at the beginning of a production run, the production system is in an in-control state. We will name it state 0. Furthermore, the production system is subject to three independent sources of shocks. A shock from source 1 causes the first KPS to shift into an out-of-control state. We will name it state 1. In this state, only the first KPS has shifted into the out-of-control state. As a result, a fixed  $\alpha$  percentage of defective items are produced. The cost incurred by producing a defective item when the production system is in state 1 is  $\pi_1$  which could represent the cost or rework, repair, replacement, or loss of goodwill. The shock occurs at a random time  $U_1$  following an exponential distribution with a mean  $1/\lambda_1$ . On the other hand, a shock from source 2 causes the second KPS to shift into an out-of-control state. It is named state 2. In this state, only the second KPS has shifted into the out-of-control state. Consequently, a fixed  $\beta$  percentage of defective items are produced, and the cost incurred by producing such a unit is  $\pi_2$ . It occurs at a random time  $U_2$  following an exponential distribution with a mean



$1/\lambda_2$ . Finally, a shock from source 3 will result in both KPS's to shift into an out-of-control state. It is named state 3. This will cause a fixed  $\delta$  percentage of defective items to be produced. The cost incurred by producing a defective item in this state is  $\pi_3$ . This shock occurs at a random time  $U_3$  following an exponential distribution with a mean  $1/\lambda_3$ .

The optimization problem is to determining optimal number of production cycles  $n$ , that minimizes the expected total cost per unit time including setup, inventory carrying, and defective costs. The expected total cost,  $Z(n)$ , can be expressed as follow:

$$Z(n) = n \left[ A + h\bar{I}(n) + \pi_1 E[N_1(n)] + \pi_2 E[N_2(n)] + \pi_3 E[N_3(n)] \right] \quad (1)$$

where  $A$  is the setup cost,  $h$  is the holding cost,  $\bar{I}(n)$  is the total inventory per production cycle,  $E[N_i(n)]$  is the expected number of defective items during a production cycle when the production system in state  $i$ .

As developed by Lin and Gong (2011), the expected number of defective items during a production cycle when the production system in state 1, 2, 3 can be expressed as Equations (2), (3), (4), respectively:

$$E[N_1(\tau)] = p\alpha \left( \frac{1 - \exp[-(\lambda_2 + \lambda_3)\tau]}{\lambda_2 + \lambda_3} - \frac{1 - \exp[-(\lambda_1 + \lambda_2 + \lambda_3)\tau]}{\lambda_1 + \lambda_2 + \lambda_3} \right) \quad (2)$$

$$E[N_2(\tau)] = p\beta \left( \frac{1 - \exp[-(\lambda_1 + \lambda_3)\tau]}{\lambda_1 + \lambda_3} - \frac{1 - \exp[-(\lambda_1 + \lambda_2 + \lambda_3)\tau]}{\lambda_1 + \lambda_2 + \lambda_3} \right) \quad (3)$$

$$E[N_3(\tau)] = p\delta \left( \frac{\exp[-(\lambda_1 + \lambda_3)\tau] + (\lambda_1 + \lambda_3)\tau - 1}{\lambda_1 + \lambda_3} + \frac{\exp[-(\lambda_2 + \lambda_3)\tau] + (\lambda_2 + \lambda_3)\tau - 1}{\lambda_2 + \lambda_3} - \frac{\exp[-(\lambda_1 + \lambda_2 + \lambda_3)\tau] + (\lambda_1 + \lambda_2 + \lambda_3)\tau - 1}{\lambda_1 + \lambda_2 + \lambda_3} \right) \quad (4)$$

where  $\tau$  is the production uptime.

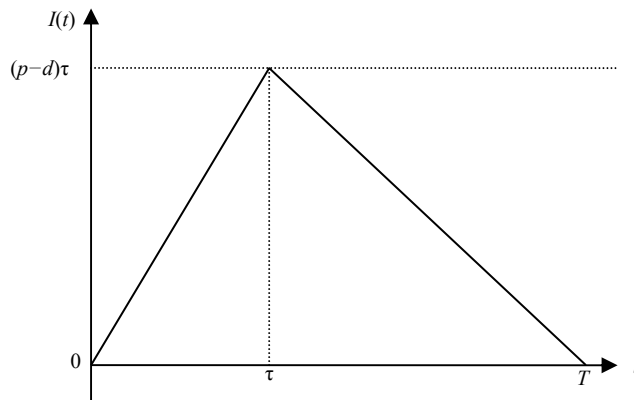


Fig. 1: A Production Cycle.

Since the inventory level in a production cycle can be illustrated as Figure 1, with a finite planning horizon  $H$  and pre-determined number of production cycles  $n$ , the length of a production cycle can be written as

$$T = H/n \tag{5}$$

Therefore, the production uptime can be expressed as

$$\tau = dH/pn \tag{6}$$

Substituting equation (6) to equations (2) – (4), we obtained

$$E[N_1(n)] = p\alpha \left( \frac{1 - \exp\left[-(\lambda_2 + \lambda_3) \frac{dH}{pn}\right]}{\lambda_2 + \lambda_3} - \frac{1 - \exp\left[-(\lambda_1 + \lambda_2 + \lambda_3) \frac{dH}{pn}\right]}{\lambda_1 + \lambda_2 + \lambda_3} \right) \tag{7}$$

$$E[N_2(n)] = p\beta \left( \frac{1 - \exp\left[-(\lambda_1 + \lambda_3) \frac{dH}{pn}\right]}{\lambda_1 + \lambda_3} - \frac{1 - \exp\left[-(\lambda_1 + \lambda_2 + \lambda_3) \frac{dH}{pn}\right]}{\lambda_1 + \lambda_2 + \lambda_3} \right) \tag{8}$$

$$E[N_3(n)] = p\delta \left( \frac{\exp\left[-(\lambda_1 + \lambda_3) \frac{dH}{pn}\right] + (\lambda_1 + \lambda_3) \frac{dH}{pn} - 1}{\lambda_1 + \lambda_3} + \frac{\exp\left[-(\lambda_2 + \lambda_3) \frac{dH}{pn}\right]}{\lambda_2 + \lambda_3} + \frac{(\lambda_2 + \lambda_3) \frac{dH}{pn} - 1}{\lambda_2 + \lambda_3} - \frac{\exp\left[-(\lambda_1 + \lambda_2 + \lambda_3) \frac{dH}{pn}\right] + (\lambda_1 + \lambda_2 + \lambda_3) \frac{dH}{pn} - 1}{\lambda_1 + \lambda_2 + \lambda_3} \right) \tag{9}$$

The total inventory per production cycle can be expressed as

$$\bar{I}(n) = \frac{1}{2} \frac{H^2}{n^2} (p - d) \frac{d}{p} \tag{10}$$

Substituting equation (10) to (1), therefore, the objective function can be expressed as

$$Z(n) = n \left\{ A + h \frac{1}{2} \frac{H^2}{n^2} (p - d) \frac{d}{p} + \pi_1 E[N_1(n)] + \pi_2 E[N_2(n)] + \pi_3 E[N_3(n)] \right\} \tag{11}$$

### 3. Solution Methodology for the Basic Model

The basic mathematical problem formulated in Section 2, as seen in equation (11), is presented in the form of single objective optimization with positive integer decision variable, which is  $n$ . Although complete enumeration of the decision variable can be used for finding the optimal solution, we develop an algorithm for finding the optimal solution with smaller computational effort.

The algorithm is developed based on MacLaurin approximation on the objective function. We apply MacLaurin series up to third order to approximate any exponential function in the objective function, i.e. by following equation:

$$\exp(-\lambda\tau) \approx 1 - \lambda\tau + \frac{1!}{2} (\lambda\tau)^2 - \frac{1}{3!} (\lambda\tau)^3 \tag{12}$$

Substituting equation (12) to equations (7) – (9) and after some algebra, we

obtain:

$$E[N_1(n)] \approx p\alpha \left[ \frac{1}{2} \lambda_1 \frac{d^2 H^2}{p^2} \frac{1}{n^2} - \frac{1}{6} \lambda_1 (\lambda_1 + 2\lambda_2 + 2\lambda_3) \frac{d^3 H^3}{p^3} \frac{1}{n^3} \right] \quad (13)$$

$$E[N_2(n)] \approx p\beta \left[ \frac{1}{2} \lambda_2 \frac{d^2 H^2}{p^2} \frac{1}{n^2} - \frac{1}{6} \lambda_2 (2\lambda_1 + \lambda_2 + 2\lambda_3) \frac{d^3 H^3}{p^3} \frac{1}{n^3} \right] \quad (14)$$

$$E[N_3(n)] \approx p\delta \left[ \frac{1}{2} \lambda_3 \frac{d^2 H^2}{p^2} \frac{1}{n^2} - \frac{1}{6} (\lambda_3^2 - 2\lambda_1 \lambda_2) \frac{d^3 H^3}{p^3} \frac{1}{n^3} \right] \quad (15)$$

Therefore, the objective function can be approximated as

$$\begin{aligned} \tilde{Z}(n) = n \left\{ A + \frac{hH^2(p-d)}{2n^2} \frac{d}{p} + \pi_1 p\alpha \left[ \frac{1}{2} \lambda_1 \frac{d^2 H^2}{p^2} \frac{1}{n^2} - \frac{1}{6} \lambda_1 (\lambda_1 + 2\lambda_2 + 2\lambda_3) \frac{d^3 H^3}{p^3} \frac{1}{n^3} \right] \right. \\ \left. + \pi_2 p\beta \left[ \frac{1}{2} \lambda_2 \frac{d^2 H^2}{p^2} \frac{1}{n^2} - \frac{1}{6} \lambda_2 (2\lambda_1 + \lambda_2 + 2\lambda_3) \frac{d^3 H^3}{p^3} \frac{1}{n^3} \right] \right. \\ \left. + \pi_3 p\delta \left[ \frac{1}{2} \lambda_3 \frac{d^2 H^2}{p^2} \frac{1}{n^2} - \frac{1}{6} (\lambda_3^2 - 2\lambda_1 \lambda_2) \frac{d^3 H^3}{p^3} \frac{1}{n^3} \right] \right\} \quad (16) \end{aligned}$$

or can be stated as

$$\tilde{Z}(n) = nA + \frac{1}{n}B - \frac{1}{n^2}C \quad (17)$$

where

$$B = \frac{H^2}{2}(p-d) \frac{d}{p} h + \frac{d^2 H^2}{p} \left[ \pi_1 \alpha \frac{1}{2} \lambda_1 + \pi_2 \beta \frac{1}{2} \lambda_2 + \pi_3 \delta \frac{1}{2} \lambda_3 \right] \quad (18)$$

$$C = \frac{d^3 H^3}{6p^2} \left[ \pi_1 \alpha \lambda_1 (\lambda_1 + 2\lambda_2 + 2\lambda_3) + \pi_2 \beta \lambda_2 (2\lambda_1 + \lambda_2 + 2\lambda_3) + \pi_3 \delta (\lambda_3^2 - 2\lambda_1 \lambda_2) \right] \quad (19)$$

In order to develop proposed algorithm, we derive two properties of equation (17), the approximation function of the objective. Property 3.1 shows that  $\tilde{Z}(n)$  is a convex function for certain conditions and Property 3.2 show the conditions for obtaining  $n^*$ , the optimal number of production cycles.

**Property 3.1.**  $\tilde{Z}(n)$  is a convex function of  $n$  when  $C \neq 0$  and  $n \geq 3C/B$

**Proof.**

A function is a convex function whenever the second derivative of that function is greater or equal to zero. Applying this condition for  $\tilde{Z}(n)$ , we found that

$$\tilde{Z}'(n) = A - \frac{B}{n^2} + \frac{2C}{n^3}$$

$$\tilde{Z}''(n) = \frac{2B}{n^3} - \frac{6C}{n^4} \geq 0$$

$$\Leftrightarrow n \geq \frac{3C}{B} \quad \square$$

**Property 3.2.** *The minimum value of  $\tilde{Z}(n)$  is obtained at  $n^* > 1$  that satisfied the following conditions:*

$$A > \frac{B}{n^*(n^*+1)} - \frac{(2n^*+1)}{n^{*2}(n^*+1)^2}C \text{ and } A < \frac{B}{n^*(n^*-1)} - \frac{(2n^*-1)}{n^{*2}(n^*-1)^2}C$$

**Proof.**

At the minimum point, the objective function value  $\tilde{Z}(n)$  must be smaller than its adjacent points. Therefore,  $\tilde{Z}(n^*) < \tilde{Z}(n^*+1)$  and  $\tilde{Z}(n^*) < \tilde{Z}(n^*-1)$ .

The first condition can be simplified into

$$\begin{aligned} &\tilde{Z}(n^*) < \tilde{Z}(n^*+1) \\ &n^*A + \frac{1}{n^*}B - \frac{1}{n^{*2}}C < (n^*+1)A + \frac{1}{(n^*+1)}B - \frac{1}{(n^*+1)^2}C \\ &(n^*+1-n^*)A > \left[ \frac{1}{n^*} - \frac{1}{(n^*+1)} \right]B - \left[ \frac{1}{n^{*2}} - \frac{1}{(n^*+1)^2} \right]C \\ &A > \frac{B}{n^*(n^*+1)} - \frac{2n^*+1}{n^{*2}(n^*+1)^2}C \end{aligned}$$

The second condition can be simplified into

$$\begin{aligned} &\tilde{Z}(n^*) < \tilde{Z}(n^*-1) \\ &n^*A + \frac{1}{n^*}B - \frac{1}{n^{*2}}C < (n^*-1)A + \frac{1}{(n^*-1)}B - \frac{1}{(n^*-1)^2}C \\ &(n^*-n+1)A < \left[ \frac{1}{(n^*-1)} - \frac{1}{n^*} \right]B - \left[ \frac{1}{(n^*-1)^2} - \frac{1}{n^{*2}} \right]C \\ &A < \frac{B}{n^*(n^*-1)} - \frac{2n^*-1}{n^{*2}(n^*-1)^2}C \end{aligned}$$

□

Based on the two properties above, we can propose algorithm 1 for finding optimal number of production cycles ( $n^*$ ). It is noted that this optimal value is derived from the approximation of the objective function ( $\tilde{Z}(n)$ ), but we are expecting that the result is also apply for the actual objective function ( $Z(n)$ ).

**Algorithm 1: Algorithm for Obtaining the Optimal Value of  $n^*$**

Step 0. Calculate B and C from equations (18) and (19), respectively. Set  $n = \lceil 3C/B \rceil$ . If  $n > 1$ , go to Step 1. If  $n = 1$  and  $\tilde{Z}(n) < \tilde{Z}(n+1)$ , set the optimal value of  $n^* = 1$  and Stop, otherwise set  $n = n + 1$  and go to Step 1.

Step 1. Calculate  $\phi_U = \frac{B}{n(n+1)} - \frac{(2n+1)}{n^2(n+1)^2}C$  and  $\phi_L = \frac{B}{n(n-1)} - \frac{(2n-1)}{n^2(n-1)^2}C$

Step 2. If  $A > \phi_U$  and  $A < \phi_L$  set the optimal value of  $n^* = n$  and Stop, otherwise set  $n = n + 1$  and return to Step 1.

## 4. Numerical Examples

Three cases with different problem parameters are presented below in order to show the generality of the proposed algorithm.

### 4.1. Example Case 1

Consider the problem with following parameters:  $p = 300, d = 200, A = 30, h = 0.08, \pi_1 = 10, \pi_2 = 10, \pi_3 = 12, \alpha = 0.1, \beta = 0.1, \delta = 0.16, \lambda_1 = 0.05, \lambda_2 = 0.1, \lambda_3 = 0.2, H = 2$ .

Following the Algorithm 1:

*Step 0.* After calculation, the value of  $B = 60.9067$  and  $C = 2.3784$ . Therefore,  $n = 1$ . Since  $\tilde{Z}(n) = \tilde{Z}(1) = 88.5282$  and  $\tilde{Z}(n+1) = \tilde{Z}(2) = 89.8587$ ,  $\tilde{Z}(n) < \tilde{Z}(n+1)$ , therefore the optimal value of  $n^* = 1$ . Stop

In order to verify the result from Algorithm 1, following table shows the objective function value of  $Z(n)$  which are calculated using equation (11). This table confirms that the minimum cost is found at  $n = 1$ , showing that this algorithm is able to find the optimum value of this case.

Table 1: The Objective Function Value of for Example Case 1

$n$	$Z(n)$
1	88.6162
2	89.8699
3	110.0412
4	135.0794
5	162.0869

### 4.2. Example Case 2

Consider the problem with following parameters:  $p = 300, d = 200, A = 100, h = 0.08, \pi_1 = 10, \pi_2 = 10, \pi_3 = 12, \alpha = 0.1, \beta = 0.1, \delta = 0.16, \lambda_1 = 0.05, \lambda_2 = 0.1, \lambda_3 = 0.2, H = 10$ .

Following the Algorithm 1:

*Step 0.* After calculation, the value of  $B = 1522.6667$  and  $C = 297.3037$ . Therefore,  $n = 1$ . Since  $\tilde{Z}(n) = \tilde{Z}(1) = 1325.3630$  and

$\tilde{Z}(n+1) = \tilde{Z}(2) = 887.0074$ ,  $\tilde{Z}(n) > \tilde{Z}(n+1)$ ,  $n = n + 1 = 2$  and go to Step 1. *Step 1* and *Step 2*. Iteration of Step 1 and Step 2 are presented in Table 2, and finally found the optimal value of  $n^* = 4$ . Stop.

Table 2: Iteration of Step 1 and Step 2 for Example Case 2

$n$	$\phi_U$	$\phi_L$	$A < \phi_L$ and $A > \phi_U$
2	212.4856	538.3556	No
3	112.4366	212.4856	No
4	69.4440	112.4366	Yes

In order to verify the result from Algorithm 1 for this case, Table 3 shows the objective function value of  $Z(n)$  which are calculated using equation (11). This table confirms that the minimum cost is found at  $n = 4$ , showing that this algorithm is also able to find the optimum value of this case.

Table 3: The Objective Function Value of for Example Case 2

$n$	$Z(n)$
1	1374.0653
2	893.5641
3	776.5151
4	762.9372
5	793.0809
6	845.7751

### 4.3. Example Case 3

Consider the problem with following parameters:  $p = 300$ ,  $d = 200$ ,  $A = 100$ ,  $h = 0.08$ ,  $\pi_1 = 10$ ,  $\pi_2 = 10$ ,  $\pi_3 = 12$ ,  $\alpha = 0.1$ ,  $\beta = 0.1$ ,  $\delta = 0.16$ ,  $\lambda_1 = 0.25$ ,  $\lambda_2 = 0.5$ ,  $\lambda_3 = 0.1$ ,  $H = 10$ .

Following the Algorithm 1:

*Step 0*. After calculation, the value of  $B = 6546.6667$  and  $C = 7432.5926$ . Therefore,  $n = 4$  and go to Step 1.

*Step 1* and *Step 2*. Iteration of Step 1 and Step 2 are presented in Table 4, and finally found the optimal value of  $n^* = 7$ . Stop.

Table 4: Iteration of Step 1 and Step 2 for Example Case 3

$n$	$\phi_U$	$\phi_L$	$A < \phi_L$ and $A > \phi_U$
4	160.1000	184.2490	No
5	127.3794	160.1000	No
6	101.0977	127.3794	No
7	81.3535	101.0977	Yes

In order to verify the result from Algorithm 1 for this case, Table 5 shows the objective function value of  $Z(n)$  which are calculated using equation (11). This table confirms that the minimum cost is found at  $n = 7$ , showing that this algorithm is consistently able to find the optimum value of this case.

Table 5: The Objective Function Value of for Example Case 3

$n$	$Z(n)$
4	1663.931
5	1560.732
6	1513.526
7	<i>1502.060</i>
8	1514.765
9	1544.565

## 5. Linear and Exponential Deteriorating Rates

In this section, we consider two cases where once a KPS has shifted to the out-of-control state, the percentage of defective items increases as the production system deteriorates over time. The first case is the problem with linear deteriorating rates, and the second case is the problem with exponential deteriorating rates.

### 5.1. Linear Deteriorating Rates

In the first case, at the beginning of a production run, only defect-free products are manufactured. As time goes on, either the first KPS or the second KPS or both may shift from an in-control state to an out-of-control state. If the first KPS has shifted at time  $x$  before the production run time  $\tau$  is reached while the second KPS is still in the in-control state, then the production system is in state 1 and will begin to deteriorate linearly. As a result, defective products are generated at a rate of  $\alpha_0 + \alpha_1(t - x)$ ,  $x < t < \tau$ ,  $\alpha_0 > 0$  and  $\alpha_1 > 0$ , at any time  $t$  after the shift. Furthermore, if the second KPS has also shifted at time  $y$  before

$\tau$  is reached, then the production system is in state 3 and defective products are produced at a rate of  $\delta_0 + \delta_1(t - y)$ ,  $x < y < t < \tau$ ,  $\delta_0 > 0$  and  $\delta_1 > 0$ , at any time  $t$  after the shift. By the same token, if the second KPS has shifted at time  $y$  while the first KPS is still in the in-control state, then the production system is in state 2 and will begin to produce defective products at a rate of  $\beta_0 + \beta_1(t - y)$ ,  $y < t < \tau$ ,  $\beta_0 > 0$  and  $\beta_1 > 0$ , at any time  $t$  after the shift.

In this case, the number of defective items produced during a production run can be expressed as

$$E[N_1(\tau)] = p \int_0^\tau \int_0^y [\alpha_0(y-x)] f_{X,Y}(x,y) dx dy + p \int_0^\tau \int_0^y \left[ \int_0^{y-x} \alpha_1 t dt \right] f_{X,Y}(x,y) dx dy + p \int_\tau^\infty \int_0^\tau [\alpha_0(\tau-x)] f_{X,Y}(x,y) dx dy + p \int_\tau^\infty \int_0^{\tau-x} \left[ \int_0^{\tau-x} \alpha_1 t dt \right] f_{X,Y}(x,y) dx dy \tag{20}$$

$$E[N_2(\tau)] = p \int_0^\tau \int_0^x [\beta_0(x-y)] f_{X,Y}(x,y) dy dx + p \int_0^\tau \int_0^x \left[ \int_0^{x-y} \beta_1 t dt \right] f_{X,Y}(x,y) dy dx + p \int_\tau^\infty \int_0^\tau [\beta_0(\tau-y)] f_{X,Y}(x,y) dy dx + p \int_\tau^\infty \int_0^{\tau-y} \left[ \int_0^{\tau-y} \beta_1 t dt \right] f_{X,Y}(x,y) dy dx \tag{21}$$

$$E[N_3(\tau)] = p \int_0^\tau \int_0^x [\delta_0(\tau-x)] f_{X,Y}(x,y) dy dx + p \int_0^\tau \int_0^x \left[ \int_0^{\tau-x} \delta_1 t dt \right] f_{X,Y}(x,y) dy dx + p \int_0^\tau \int_0^y [\delta_0(\tau-y)] f_{X,Y}(x,y) dx dy + p \int_0^\tau \int_0^y \left[ \int_0^{\tau-y} \delta_1 t dt \right] f_{X,Y}(x,y) dx dy + p \int_0^\tau \delta_0(\tau-x) f_{X,Y}(x,y) dx dy + p \int_0^\tau \left[ \int_0^{\tau-x} \delta_1 t dt \right] f_{X,Y}(x,y) dx dy \tag{22}$$

where  $f_{X,Y}(x,y)$  is the joint probability density function that is expressed as following:

$$f_{X,Y}(x,y) = \begin{cases} \lambda_2(\lambda_1 + \lambda_3) \exp[-\lambda_2 y - (\lambda_1 + \lambda_3)x], & \text{if } (X,Y) \in \{0 \leq Y < X \leq \tau\} \\ \lambda_1(\lambda_2 + \lambda_3) \exp[-\lambda_1 x - (\lambda_2 + \lambda_3)y], & \text{if } (X,Y) \in \{0 \leq X < Y \leq \tau\} \\ \lambda_2(\lambda_1 + \lambda_3) \exp[-\lambda_2 y - (\lambda_1 + \lambda_3)x], & \text{if } (X,Y) \in \{0 \leq Y \leq \tau \leq X\} \\ \lambda_1(\lambda_2 + \lambda_3) \exp[-\lambda_1 x - (\lambda_2 + \lambda_3)y], & \text{if } (X,Y) \in \{0 \leq X \leq \tau \leq Y\} \\ \lambda_3 \exp[-(\lambda_1 + \lambda_2 + \lambda_3)x] & \text{if } (X,Y) \in \{0 \leq X = Y \leq \tau\} \end{cases} \tag{23}$$

After doing the integrations and substituting equation 6, we obtain



$$\begin{aligned}
 E[N_1(n)] = & p\alpha_0 \left( \frac{1 - \exp\left[-(\lambda_2 + \lambda_3) \frac{dH}{pn}\right]}{\lambda_2 + \lambda_3} - \frac{1 - \exp\left[-(\lambda_1 + \lambda_2 + \lambda_3) \frac{dH}{pn}\right]}{\lambda_1 + \lambda_2 + \lambda_3} \right) + \\
 & p\alpha_1 \left( \frac{1 - \exp\left[-(\lambda_2 + \lambda_3) \frac{dH}{pn}\right] - (\lambda_2 + \lambda_3) \frac{dH}{pn} \exp\left[-(\lambda_2 + \lambda_3) \frac{dH}{pn}\right]}{(\lambda_2 + \lambda_3)^2} + \right. \\
 & \left. \frac{1 - \exp\left[-(\lambda_1 + \lambda_2 + \lambda_3) \frac{dH}{pn}\right]}{\lambda_1(\lambda_1 + \lambda_2 + \lambda_3)} - \frac{1 - \exp\left[-(\lambda_2 + \lambda_3) \frac{dH}{pn}\right]}{\lambda_1(\lambda_2 + \lambda_3)} \right) \quad (24)
 \end{aligned}$$

$$\begin{aligned}
 E[N_2(n)] = & p\beta_0 \left( \frac{1 - \exp\left[-(\lambda_1 + \lambda_3) \frac{dH}{pn}\right]}{\lambda_1 + \lambda_3} - \frac{1 - \exp\left[-(\lambda_1 + \lambda_2 + \lambda_3) \frac{dH}{pn}\right]}{\lambda_1 + \lambda_2 + \lambda_3} \right) + \\
 & p\beta_1 \left( \frac{1 - \exp\left[-(\lambda_1 + \lambda_3) \frac{dH}{pn}\right] - (\lambda_1 + \lambda_3) \frac{dH}{pn} \exp\left[-(\lambda_1 + \lambda_3) \frac{dH}{pn}\right]}{(\lambda_1 + \lambda_3)^2} + \right. \\
 & \left. \frac{1 - \exp\left[-(\lambda_1 + \lambda_2 + \lambda_3) \frac{dH}{pn}\right]}{\lambda_2(\lambda_1 + \lambda_2 + \lambda_3)} - \frac{1 - \exp\left[-(\lambda_1 + \lambda_3) \frac{dH}{pn}\right]}{\lambda_2(\lambda_1 + \lambda_3)} \right) \quad (25)
 \end{aligned}$$

$$\begin{aligned}
 E[N_3(n)] = & p\delta_0 \left( \frac{\exp\left[-(\lambda_1 + \lambda_3) \frac{dH}{pn}\right] + (\lambda_1 + \lambda_3) \frac{dH}{pn} - 1}{\lambda_1 + \lambda_3} + \frac{\exp\left[-(\lambda_2 + \lambda_3) \frac{dH}{pn}\right] + (\lambda_2 + \lambda_3) \frac{dH}{pn} - 1}{\lambda_2 + \lambda_3} \right. \\
 & \left. - \frac{\exp\left[-(\lambda_1 + \lambda_2 + \lambda_3) \frac{dH}{pn}\right] + (\lambda_1 + \lambda_2 + \lambda_3) \frac{dH}{pn} - 1}{\lambda_1 + \lambda_2 + \lambda_3} \right) \\
 & + p\delta_1 \left[ \frac{\left(\frac{dH}{pn}\right)^2}{2} - \frac{1 - \exp\left[-(\lambda_1 + \lambda_2 + \lambda_3) \frac{dH}{pn}\right] - (\lambda_1 + \lambda_2 + \lambda_3) \frac{dH}{pn}}{(\lambda_1 + \lambda_2 + \lambda_3)^2} \right. \\
 & \left. + \frac{1 - \exp\left[-(\lambda_1 + \lambda_3) \frac{dH}{pn}\right] - (\lambda_1 + \lambda_3) \frac{dH}{pn}}{(\lambda_1 + \lambda_3)^2} + \frac{1 - \exp\left[-(\lambda_2 + \lambda_3) \frac{dH}{pn}\right] - (\lambda_2 + \lambda_3) \frac{dH}{pn}}{(\lambda_2 + \lambda_3)^2} \right] \quad (26)
 \end{aligned}$$

Therefore the objective function of linear deteriorating rates model is the equation (11) with updated expression on  $E[N_1(n)]$ ,  $E[N_2(n)]$ , and  $E[N_3(n)]$ , which are following equations (24), (25), (26), respectively.

Similar to the basic model, after applying Maclaurin series in the equation (12) to approximate every exponential function in the expression, and doing some algebra, we can obtain the approximation of the objective function as follow

$$\tilde{Z}(n) = nA + \frac{1}{n} B_L - \frac{1}{n^2} C_L \quad (27)$$

where

$$B_L = \frac{H^2}{2} \frac{d^2}{p} \left[ \frac{h}{d} (p - d) + \pi_1 \alpha_0 \lambda_1 + \pi_2 \beta_0 \lambda_2 + \pi_3 \delta_0 \lambda_3 \right] \quad (28)$$

$$C_L = \frac{d^3 H^3}{6p^2} (\pi_1 \lambda_1 [(\lambda_1 + 2\lambda_2 + 2\lambda_3)\alpha_0 - \alpha_1] + \pi_2 \lambda_2 [(2\lambda_1 + \lambda_2 + 2\lambda_3)\beta_0 - \beta_1] + \pi_3 \lambda_3 [(\lambda_3^2 - 2\lambda_1 \lambda_2)\delta_0 - \delta_1]) \tag{29}$$

Since the approximation of the objective function of the linear deteriorating rates model is in the same form as its of the basic model, the solution approach developed in Section 3 can be utilized to find the optimal solution with  $B_L$  and  $C_L$  replacing B and C appearing in the Algorithm 1.

### 5.2. Exponential Deteriorating Rates

In this second case, we consider a case where, if the first KPS, or the second KPS, or both KPSs are shifted from an in-control state to an out-of-control state, defective items produced will be generated at a rate of  $\alpha_0 + \alpha_1 [1 - \exp(-\alpha_2 t)]$ ,  $\beta_0 + \beta_1 [1 - \exp(-\beta_2 t)]$ , and  $\delta_0 + \delta_1 [1 - \exp(-\delta_2 t)]$ , respectively. The expected number of defective items produced during a production run can be expressed as follows:

$$E[N_1(\tau)] = p \int_0^\tau \int_0^y [\alpha_0(y-x)] f_{X,Y}(x,y) dx dy + p \int_0^\tau \int_0^y \left[ \int_0^{y-x} \alpha_1 (1 - \exp(-\alpha_2 t)) dt \right] f_{X,Y}(x,y) dx dy + p \int_0^\tau \int_0^\tau [\alpha_0(\tau-x)] f_{X,Y}(x,y) dx dy + p \int_0^\tau \int_0^{\tau-x} \left[ \int_0^{\tau-x} \alpha_1 (1 - \exp(-\alpha_2 t)) dt \right] f_{X,Y}(x,y) dx dy \tag{30}$$

$$E[N_2(\tau)] = p \int_0^\tau \int_0^x [\beta_0(x-y)] f_{X,Y}(x,y) dy dx + p \int_0^\tau \int_0^x \left[ \int_0^{x-y} \beta_1 (1 - \exp(-\beta_2 t)) dt \right] f_{X,Y}(x,y) dy dx + p \int_0^\tau \int_0^\tau [\beta_0(\tau-y)] f_{X,Y}(x,y) dy dx + p \int_0^\tau \int_0^{\tau-y} \left[ \int_0^{\tau-y} \beta_1 (1 - \exp(-\beta_2 t)) dt \right] f_{X,Y}(x,y) dy dx \tag{31}$$

$$E[N_3(\tau)] = p \int_0^\tau \int_0^x [\delta_0(\tau-x)] f_{X,Y}(x,y) dy dx + p \int_0^\tau \int_0^x \left[ \int_0^{\tau-x} \delta_1 (1 - \exp(-\delta_2 t)) dt \right] f_{X,Y}(x,y) dy dx + p \int_0^\tau \int_0^y [\delta_0(\tau-y)] f_{X,Y}(x,y) dx dy + p \int_0^\tau \int_0^y \left[ \int_0^{\tau-y} \delta_1 (1 - \exp(-\delta_2 t)) dt \right] f_{X,Y}(x,y) dx dy + p \int_0^\tau \int_0^\tau [\delta_0(\tau-x)] f_{X,Y}(x,y) dx dy + p \int_0^\tau \int_0^{\tau-x} \left[ \int_0^{\tau-x} \delta_1 (1 - \exp(-\delta_2 t)) dt \right] f_{X,Y}(x,y) dx dy \tag{32}$$

Following the similar procedure with the basic and the linear deteriorating rates model, we obtain the approximation of the objective function as follow

$$\tilde{Z}(n) = nA + \frac{1}{n} B_E - \frac{1}{n^2} C_E \tag{33}$$

where

$$B_E = \frac{H^2 d^2}{2 p} \left[ \frac{h}{d} (p - d) + \pi_1 \alpha_0 \lambda_1 + \pi_2 \beta_0 \lambda_2 + \pi_3 \delta_0 \lambda_3 \right] \tag{34}$$

$$C_E = \frac{d^3 H^3}{6p^2} (\pi_1 \lambda_1 [(\lambda_1 + 2\lambda_2 + 2\lambda_3)\alpha_0 - \alpha_1 \alpha_2] + \pi_2 \lambda_2 [(2\lambda_1 + \lambda_2 + 2\lambda_3)\beta_0 - \beta_1 \beta_2] + \pi_3 \lambda_3 [(\lambda_3^2 - 2\lambda_1 \lambda_2)\delta_0 - \delta_1 \delta_2 \lambda_3]) \tag{35}$$

Again, we easily see that, in this case, the solution approach developed in Section 3 can be used find the optimal solution with  $B_E$  and  $C_E$  replacing  $B$  and  $C$ , respectively.

### 5.3. Numerical Illustration

Example case 1 from Section 4.1 is selected here for the first illustration. Suppose the deteriorating rates are linear with  $\alpha_0 = 0.1$ ,  $\beta_0 = 0.1$ ,  $\delta_0 = 0.16$ ,  $\alpha_1 = 0.01$ ,  $\beta_1 = 0.01$ , and  $\delta_1 = 0.016$ , instead of fixed. After calculating  $B_L$  and  $C_L$  and following Algorithm 1, it is found that  $n^* = 2$ . When the deteriorating rates are exponential with  $\alpha_0 = 0.1$ ,  $\beta_0 = 0.1$ ,  $\delta_0 = 0.16$ ,  $\alpha_1 = 0.01$ ,  $\beta_1 = 0.01$ ,  $\delta_1 = 0.016$ ,  $\alpha_2 = 2$ ,  $\beta_2 = 2$ ,  $\delta_2 = 2$ , it is found that  $n^* = 3$  as the result of Algorithm 1 using  $B_E$  and  $C_E$ .

Similar situation is occurred when the same parameters are used for example case 2 from Section 4.2, in which the deteriorating rates are linear with  $\alpha_0 = 0.1$ ,  $\beta_0 = 0.1$ ,  $\delta_0 = 0.16$ ,  $\alpha_1 = 0.01$ ,  $\beta_1 = 0.01$ ,  $\delta_1 = 0.016$  and exponential with  $\alpha_0 = 0.1$ ,  $\beta_0 = 0.1$ ,  $\delta_0 = 0.16$ ,  $\alpha_1 = 0.01$ ,  $\beta_1 = 0.01$ ,  $\delta_1 = 0.016$ ,  $\alpha_2 = 2$ ,  $\beta_2 = 2$ ,  $\delta_2 = 2$ . The  $n^*$  value is changed from 4 for fixed deteriorating rates, to 6 for linear deteriorating rates, and 7 for exponential deteriorating rates. While this situation is not taken place for every problem parameters, however, it is implied that linear and exponential deteriorating rates tend to have bigger optimal number of production cycles than the fixed one.

## 6. Conclusion

In this paper, an economic production quantity (EPQ) model over a finite planning horizon is considered where the production system is imperfect and dictated by two key production subsystems. Each key production subsystem (KPS) will shift from an in-control state to an out-of-control state during a production run, where the time-to-shift of two KPS's are two random variables following a bivariate exponential distribution. When the system is in the out-of-control state, a percentage of items produced become defective and incur additional costs. The objective is to determine a number of production cycles that minimizes the expected total cost per unit time including setup, inventory carrying, and defective costs. Three different defective rate scheme has been investigated, which are fixed, linear, and exponential. It is shown that linear and exponential deteriorating rates tend to have bigger optimal number of

production cycles than the fixed one. The future research directions of this model include allowing shortages, considering time value of money, adopting a periodic inspection policy, and investing in setup to improve the quality of the KPS's.

## **7. Acknowledgements**

This work is partially supported by Directorate General of Higher Education, Ministry of Education and Culture, Republic Indonesia under International Research Collaboration and Scientific Publication Research Grant No. 086/SP2H/PL/DIT.LITABMAS/V/2013.

## **References**

- Ai, T.J., Astanti, R.D., Bintoro, A.G., & Wibowo, T.I. (2013). Three Approaches to Find Optimal Production Run Time of an Imperfect Production System. *Proceedings of the Institute of Industrial Engineers Asian Conference 2013*, 1065-1070.
- Ben-Daya, M. (1999). Multi-stage lot sizing models with imperfect processes and inspection errors. *Production Planning & Control*, 10(2), 118-126.
- Ben-Daya, M., & Noman, S. M. (2008). Integrated inventory and inspection policies for stochastic demand. *European Journal of Operational Research*, 185(1), 159-169.
- Ben-Daya, M., Noman, S. M., & Hariga, M. (2006). Integrated inventory control and inspection policies with deterministic demand. *Computers & Operations Research*, 33(6), 1625-1638.
- Chakraborty, T., Giri, B. C., & Chaudhuri, K. S. (2009). Production lot sizing with process deterioration and machine breakdown under inspection schedule. *Omega*, 37(2), 257-271.
- Chung, K. J., & Hou, K. L. (2003). An optimal production run time with imperfect production processes and allowable shortages. *Computers & Operations Research*, 30(4), 483-490.
- Giri, B. C., & Dohi, T. (2007). Inspection scheduling for imperfect production processes under free repair warranty contract. *European Journal of Operational Research*, 183(1), 238-252.

Hariga, M., & Ben - Daya, M. (1998). Note: The economic manufacturing lot - sizing problem with imperfect production processes: Bounds and optimal solutions. *Naval Research Logistics*, 45(4), 423-433.

Hou, K. L., & Lin, L. C. (2005). EMQ model with maintenance actions for deteriorating production system. *Information and Management Sciences*, 16, 53-65.

Hsieh, C. C., & Lee, Z. Z. (2005). Joint determination of production run length and number of standbys in a deteriorating production process. *European Journal of Operational Research*, 162(2), 359-371.

Huang, Y. S., Lo, H. C., & Ho, J. W. (2008). Design of effective inspection schema for imperfect production systems. *International Journal of Production Research*, 46(16), 4537-4551. doi:10.1080/00207540701261634

Khouja, M., & Mehrez, A. (1994). Economic production lot size model with variable production rate and imperfect quality. *Journal of the Operational Research Society*, 1405-1417.

Kim, C. H., & Hong, Y. (1999). An optimal production run length in deteriorating production processes. *International Journal of Production Economics*, 58(2), 183-189.

Lee, H. L., & Rosenblatt, M. J. (1987). Simultaneous determination of production cycle and inspection schedules in a production system. *Management Science*, 33(9), 1125-1136.

Lee, H. L., & Rosenblatt, M. J. (1988). Economic design and control of monitoring mechanisms in automated production systems. *IIE Transactions*, 20(2), 201-209.

Lee, H. L., & Rosenblatt, M. J. (1989). A production and maintenance planning model with restoration cost dependent on detection delay. *IIE Transactions*, 21(4), 368-375.

Lee, J. S., & Park, K. S. (1991). Joint determination of production cycle and inspection intervals in a deteriorating production system. *Journal of the Operational Research Society*, 42(9), 775-783.

- Lin, C. S., Chen, C. H., & Kroll, D. E. (2003). Integrated production-inventory models for imperfect production processes under inspection schedules. *Computers & Industrial Engineering*, 44(4), 633-650.
- Lin, G. C., & Gong, D. C. (2011). On an Economic lot sizing model subject to two imperfect key production subsystems. *Proceedings of IIE Asian Conference 2011*, Shanghai, China.
- Lin, G. C., & Lin, H. (2007). Determining a production run time for an imperfect production-inventory system with scrap. *Journal of Scientific and Industrial Research*, 66(9), 724-735.
- Lin, T. M., Tseng, S. T., & Liou, M. J. (1991). Optimal inspection schedule in the imperfect production system under general shift distribution. *Journal of the Chinese Institute of Industrial Engineers*, 8(2), 73-81.
- Liou, M. J., Tseng, S. T., & Lin, T. M. (1994). The effects of inspection errors to the imperfect EMQ model. *IIE Transactions*, 26(2), 42-51.
- Makis, V. (1998). Optimal lot sizing and inspection policy for an EMQ model with imperfect inspections. *Naval Research Logistics*, 45(2), 165-186.
- Ouyang, L. Y., & Chang, H. C. (2000). EMQ model with variable lead time and Imperfect production process. *International Journal of Information and Management Sciences*, 11(1), 1-10.
- Rosenblatt, M. J., & Lee, H. L. (1986a). A comparative study of continuous and periodic inspection policies in deteriorating production systems. *IIE Transactions*, 18(1), 2-9.
- Rosenblatt, M. J., & Lee, H. L. (1986b). Economic production cycles with imperfect production processes. *IIE Transactions*, 18(1), 48-55.
- Wang, C. H., & Sheu, S. H. (2001). Simultaneous determination of the optimal production-inventory and product inspection policies for a deteriorating production system. *Computers & Operations Research*, 28(11), 1093-1110.
- Wang, C. H., & Tsai, W. C. (2012). Determining the production lot size with a heuristic inspection policy for controlling the quality of input materials and products. *International Journal of Systems Science*, 43(11), 2030-2039.