



KAOHSIUNG APIEMS & CIE 2007

Proceedings of The 8th Asia Pacific Industrial Engineering & Management System and
2007 Chinese Institute of Industrial Engineers Conference

Service Value Innovation and Challenges

-December 9 - 12, 2007, The Ambassador Hotel, Kaohsiung, Taiwan-

Sponsor

Asia Pacific Industrial Engineering and Management Society
Chinese Institute of Industrial Engineers

Conference Organizer

Department of Industrial Engineering and Management
National Yunlin University of Science and Technology



APIEMS & CIIE 2007


KAOHSIUNG


Proceedings of The 8th Asia Pacific Industrial Engineering & Management System
and
2007 Chinese Institute of Industrial Engineers Conference

December 9-12, 2007
Kaohsiung, Taiwan

Sponsor

Asia Pacific Industrial Engineering and Management Society
Chinese Institute of Industrial Engineers

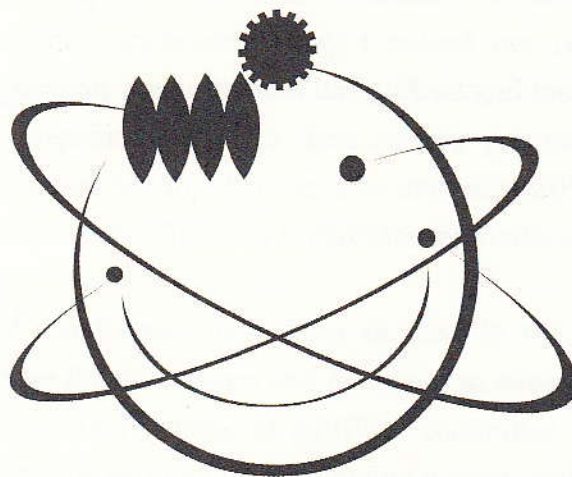



APIEMS & CIIE 2007

KAOHSIUNG

Published by

Department of Industrial Engineering and Management

National Yunlin University of Science and Technology

123, University Road, Section 3, Douliu, Yunlin 64002, Taiwan, R.O.C.

December 2007 Edition

All correspondence relating to the content of this publication should be addressed to

Dr. Chau-Chen Torng

Department of Industrial Engineering and Management

National Yunlin University of Science and Technology

Tel: +886-5-5342601#5149

Fax: +886+5+5312073

E-mail: apiems@yuntech.edu.tw

Website: <http://www.apiems.yuntech.edu.tw>

Printed in Taiwan by

Department of Industrial Engineering and Management

ISBN: 978-986-01-1761-5

Advisory organization

National Science Council

Ministry of Economic Affairs, R.O.C.

Ministry of Education, R.O.C.

Sponsor

Asia Pacific Industrial Engineering & Management Society

Chinese Institute of Industrial Engineers

Conference Organizer

National Yunlin University of Science and Technology

Co-organizer

The Government of Kaohsiung City

The Government of Kaohsiung County

Chinese Society for Management of Technology

Chinese Society for Quality

Chinese Society of Management Science

Ergonomics Society of Taiwan

I-Shou University

National Kaohsiung University of Applied Science

National Sun Yat-Sen University

National University of Kaohsiung

Operations Research Society of Taiwan

Taiwanese Association of Artificial Intelligence

Taiwan Logistics Management Association

Co-Sponsor

Ardentec Corporation

Advanced Semiconductor Engineering Inc.

China Steel Corporation

Siliconware Precision Industries Co., Ltd

Table of Contents

Session M3-R01

Comparisons of the Symmetric and Asymmetric Control Limits for R Charts.....	1
--	---

Huifen Chen, Wei-Lun Kuo

The Fusion Six Sigma Case Study: Reducing Wave Soldering Defects in an Electronic Industry ..	1
---	---

Pichit Sukchareonpong, Jaran Sabseeree, and Vinit Thueakthong

Six Sigma and Balanced Scorecard: Complementary Approaches	1
--	---

Sara Behdad, Saeed Mansour, and Fahimeh Mohammadian

A Modified Control Scheme for Fraction Nonconforming under Markov Dependent Processes ...	2
---	---

Pei-Wen Chen, Chuen-Sheng Cheng

Forecasting with X-12-ARIMA : international tourist arrivals to India and Thailand.....	2
---	---

Chukiat Chaiboonsri, Prasert Chaitip, N. Rangaswamy

Session M3-R02

An Optimal Policy for CSP-1 with Inspection Errors and Return Cost.....	2
---	---

Hong-Fwu Yu, Wen-Ching Yu, and Wen Ping Wu

Economic Production Quantity with Imperfect Production Processes and Learning Effects	2
---	---

Deng-Maw Tsai

Estimating the Stage Completion Time and the Internal Due Date in Flexible Flow Shops with Dynamic Arrival	3
---	---

Ming-Hsien Yang, Shu-Hsing Chung, and Ching-Kuei Kao

Integrated Optimal Economic Production Quantity and Preventive Maintenance Plan	3
---	---

Syu -Jheng Syu, and Yarlin Kuo

A Decomposition Approach for a Two-Machine Flow Shop Sequencing with Time Constraint Problem	4
---	---

Yarlin Kuo, Husan-Hui Yu

Session M3-R03

Ming-Shan Lu, Tong Chie Hsieh, Jaing Wan Yu

Prediction of Defect Inspection Cycle Time in TFT-LCD Panel Manufacturing.....213

Chien-Wen Shen, Chao-Fa Chen

Customer Preference based Product Configuration and Retrieving for Mass Customization using Circle Set 214

Jaeho Lee, Joon Young Park

Performance Evaluation of an Assemble-To-Order System Operated by the CONWIP Control Mechanism 214

Chan-Woo Park, Hyo-Seong Lee

Session W1-R04

A Soft Computing Approach in Predictive Customer Behavior Modeling for Customer Relationship Management 215

Yung-Hsin Chen, Jui-Chen Hsu

A System Dynamics Model for Collaborative Forecasting of Demand Chain – Taking Taiwan Motherboard Industry as Example.....215

Ming-Kuen Chen, Chien-Hsin Wang , Kuang-Hua Pai

Analysis of the Behaviors of Multi-Robots that Implement Ant Colony Clustering Using Mobile Agents 216

Osamu Sato , Masataka Ugajin , Yasuhiro Tsujimura , Hisashi Yamamoto, Yasushi Kambayashi

Construction of Machine Model for Corrugated Board Making in Paper Laboratory217

Wittaya Kaewsubsak, Suchapa Netpradit, Tanatorn Tongsumrith

A Study on the Effect of Consumer Heterogeneity Based on Perceived Price.....217

Junko Shibata

Session W1-R05

Safety-first Portfolio Optimization Problem using Approximated Tail Distribution218

Kuo-Hwa Chang, Yu-Lin Chiang, Ming-Kuan Wei, Yu-Ting Chou

Exact Solution of Inventory Replenishment Policy for Deteriorating Items with Linearly

Increasing Demand.....	218
------------------------	-----

Wen-Yang Lo

Expected Return vs. Volatility: Lessons from the Time-Series and Cross-Sectional Factors Underlying Taiwan Stock Returns	219
---	-----

Peter A. Ammermann , Ming-Hsiang Chen, Ming-Chang Cheng

A Semi Hierarchical Cluster Analysis of Genome-wide Expression Data and a Case Study	219
--	-----

Kuo-Sheng Lin, Chen-Fu Chien

A Particle Swarm Optimization for the Vehicle Routing Problem with Clustered Customers....	220
--	-----

The Jin Ai, Voratas Kachitvichyanukul

Session W1-R06

How Effective is Government Support for Korean Women Entrepreneurs in Small and Medium Enterprises?	221
--	-----

Jong Ha Lee, So Young Sohn

Integrated Competency-Based Human Resource Management System: Implemented Model in Indonesian Crown Corporations.....	221
--	-----

Joko Siswanto

The Determinant of Bi-national Manpower Disposing: Optimal Employee Ratios of Out-sourcing and Full-time.....	222
--	-----

Tyrone T. Lin ,Chun-Lin Chen

Realizing a Strategic Human Resource Management through Account Management Approach	222
--	-----

Jonah Tyan

Characteristics of Environmental Management in the Chinese Company	223
--	-----

Li Ke

Session W1-R07

Developing a Coupling-oriented Algorithm in Process Model.....	224
--	-----

Hen-Yi Jen, Chi-Kuang Chen, Cheng-Ho Tsai

A Particle Swarm Optimization for the Vehicle Routing Problem with Clustered Customers

The Jin Ai^{1*} and Voratas Kachitvichyanukul²

^{1,2} Industrial Engineering and Management, School of Engineering and Technology
Asian Institute of Technology

P.O. Box 4, Klong Luang, Pathumtani 12120, THAILAND

¹Corresponding author, E-mail: thejin.ai@ait.ac.th

²E-mail: voratas@ait.ac.th

Abstract: This paper presented a particle swarm optimization algorithm (PSO) for solving vehicle routing problem (VRP) which involves single depot and clustered customers. Three different solution representations and decoding methods are proposed for solving VRP using PSO. These representations are similar in the use of particle with $2m$ dimension to represent m vehicles. In the decoding step, these particle dimensions are transforming to a priority matrix of vehicle to serve each customer. These representations are different on how to create customer priority list: the first representation directly uses the customer list data as the customer priority list; the second preprocesses the customer list data according to its polar angle as the customer priority list; the third uses random-key to build the customer priority list. The customer priority list and vehicle priority matrix are utilized for constructing vehicle routes at the end of the decoding step. A computational experiment is conducted by applying the proposed algorithm on the benchmark data set of capacitated vehicle routing problem (CVRP) and the vehicle routing problem with time windows (VRPTW). The result showed that the proposed algorithm with the third representation is the most effective to solve CVRP and VRPTW problems.

Keywords: Vehicle Routing Problem, Clustered Customers, Particle Swarm Optimization, Solution Representation.

1. INTRODUCTION

Recently, the Particle Swarm Optimization (PSO) had been applied for solving the Capacitated Vehicle Routing Problem or CVRP (Chen *et al.*, 2006; Ai and Kachitvichyanukul, 2007). The CVRP is the basic variant of the Vehicle Routing Problem (VRP), which is a problem to design a set of vehicle routes in which a fixed fleet of delivery vehicles of uniform capacity must service known customer demands for a single commodity from a single depot at minimum cost. The general requirements of this problem are (1) each route starts and ends at the depot, (2) each customer is visited exactly once by exactly one vehicle, (3) the total demand of each route does not exceed vehicle capacity, and (4) the total duration of each route (including travel and service times) does not exceed a preset limit. Christofides *et al.* (1979) provided a comprehensive review on problem formulation and solution methods for the CVRP.

Particle Swarm Optimization (PSO) is a population based search method proposed by Kennedy and Eberhart (1995), which were motivated by the behavior of group organism such as bee swarm, fish school, and bird flock. PSO imitated the physical movements of the individuals in the swarm as a searching method, altogether with its cognitive and social behavior as local and global exploration abilities. In the PSO, a solution of a specific problem is being represented by a position of an n -dimensional particle. The particle searches for solution by moving through search space with a velocity vector. The PSO algorithm starts with population of particles with random initial position and velocity. The population of particles is usually called a swarm. In one iteration step, every particle is moved from previous position to the new position based on its velocity; and its velocity is updated based on its personal best position and the global best position obtained so far. Once a particle reach a position which has a better objective function than the previous best objective function for this particle, the personal best position is updated. Also, if it found better objective function than the previous best objective function of the whole swarm, the global best position is updated. A brief and complete survey on PSO mechanism, technique, and application is provided by Kennedy and Eberhart (2001) and also Clerc (2006).

The PSO works on finding the best position and commonly the position is represented by number. To make PSO applicable to a specific problem; the relationship between the position of particles and the solutions of that problem must be clearly defined. In CVRP case, the particle's position represents the vehicle route. The two published PSO for CVRP applied different type of position representation: Chen *et al.* (2006) used discrete value of position, while Ai and Kachitvichyanukul (2007) used real value of position. The difference of the position representation has two consequences: different mechanism for particles movement and different decoding method for transforming particle to vehicle route. The real value PSO is favorable since it has simpler particle movement mechanism and more flexible decoding method than the discrete value PSO. It was shown by the computational result of these PSO that the real value PSO is capable to solve

larger problem with faster computational time than the discrete value PSO, even though the real value PSO is implemented without any local search or other hybrid method (Ai and Kachitvichyanukul, 2007).

This paper studies further the capability of the real value PSO by focus only on the problem with single depot and clustered customers and extend the work not only for the capacitated problem, but also for the vehicle routing problem with time window (VRPTW). The VRPTW extends the CVRP by one additional set of constraints, in which each customer must be served by a vehicle within a certain given time window. Three different solution representations and its decoding method for transforming particle to vehicle route are proposed here based on the real value PSO for CVRP (Ai and Kachitvichyanukul, 2007). The PSO framework for CVRP is also extended to the general VRP and applied here using three different solution representations and decoding methods.

The remainder of this paper is organized as follow: Section 2 reviews PSO framework for solving VRP. Section 3 explains the proposed solution representations and decoding methods. Section 4 discusses the computational experiment of the PSO on benchmark data set. Finally, Section 5 concludes the result of this study.

2. PSO FRAMEWORK FOR SOLVING VRP

The PSO framework for solving VRP is presented in Algorithm 1 for review purpose. The algorithm is exactly same with the PSO framework for CVRP (Ai and Kachitvichyanukul, 2007), which is developed based on GLNPSO, a PSO Algorithm with multiple social learning structures (Pongchairerks and Kachitvichyanukul, 2005).

In this algorithm, the particles are initialized in step 1, their corresponding fitness value are evaluated in steps 2-3, their cognitive and social information are updated in steps 4-7, and their positions are updated in step 8. Step 9 is the controlling step for repeating or stopping the iteration. This framework can be applied to different VRP variant with different solution representation by changing the decoding method in step 2.

Notation

t	: Iteration index; $t = 1 \dots T$
i	: Particle index, $i = 1 \dots I$
d	: Dimension index, $d = 1 \dots D$
u	: Uniform random number in the interval $[0,1]$
$w(t)$: Inertia weight in the t^{th} iteration
$v_{id}(t)$: Velocity of the i^{th} particle at the d^{th} dimension in the t^{th} iteration
$x_{id}(t)$: Position of the i^{th} particle at the d^{th} dimension in the t^{th} iteration
p_{id}	: Personal best position (pbest) of the i^{th} particle at the d^{th} dimension
p_{gd}	: Global best position (gbest) at the d^{th} dimension
p_{id}^L	: Local best position (lbest) of the i^{th} particle at the d^{th} dimension
p_{id}^N	: Near neighbor best position (nbest) of the i^{th} particle at the d^{th} dimension
c_p	: Personal best position acceleration constant
c_g	: Global best position acceleration constant
c_l	: Local best position acceleration constant
c_n	: Near neighbor best position acceleration constant
X_i	: Vector position of the i^{th} particle, $[x_{i1} \ x_{i2} \ \dots \ x_{iD}]$
V_i	: Vector velocity of the i^{th} particle, $[v_{i1} \ v_{i2} \ \dots \ v_{iD}]$
P_i	: Vector personal best position of the i^{th} particle, $[p_{i1} \ p_{i2} \ \dots \ p_{iD}]$
P_g	: Vector global best position, $[p_{g1} \ p_{g2} \ \dots \ p_{gD}]$
P_i^L	: Vector local best position of the i^{th} particle, $[p_{i1}^L \ p_{i2}^L \ \dots \ p_{iD}^L]$

Algorithm 1: PSO Framework for VRP

1. Initialize I particles as a population, generate the i^{th} particle with random position X_i in the range $[x^{\min}, x^{\max}]$, velocity $V_i = 0$ and personal best $P_i = X_i$ for $i = 1 \dots I$. Set iteration $t = 1$.

2. For $i = 1 \dots I$, decode $X_i(t)$ to a set of vehicle route R_i .
3. For $i = 1 \dots I$, compute the performance measurement of R_i , and set this as the fitness value of X_i , $\varphi(X_i)$.
4. Update pbest: For $i = 1 \dots I$, update $P_i = X_i$, if $\varphi(X_i) < \varphi(P_i)$.
5. Update gbest: For $i = 1 \dots I$, update $P_g = P_i$, if $\varphi(P_i) < \varphi(P_g)$.
6. Update lbest: For $i = 1 \dots I$, among all pbest from K neighbors of the i^{th} particle, set the personal best which obtains the least fitness value to be P_i^L .
7. Generate nbest: For $i = 1 \dots I$, and $d = 1 \dots D$, set $p_{id}^N = p_{jd}$ that maximizing fitness-distance-ratio (FDR) for $j = 1 \dots I$. Where FDR is defined as

$$FDR = \frac{\varphi(X_i) - \varphi(P_j)}{|x_{id} - p_{jd}|} \text{ which } i \neq j \quad (1)$$

8. Update the velocity and the position of each i^{th} particle:

$$w(t) = w(T) + \frac{t-T}{1-T} [w(1) - w(T)] \quad (2)$$

$$v_{id}(t+1) = w(t)v_{id}(t) + c_p u(p_{id} - x_{id}(t)) + c_g u(p_{gd} - x_{id}(t)) + c_l u(p_{id}^L - x_{id}(t)) + c_n u(p_{id}^N - x_{id}(t)) \quad (3)$$

$$x_{id}(t+1) = x_{id}(t) + v_{id}(t+1) \quad (4)$$

9. If the stopping criterion is met, i.e. $t = T$, stop. Otherwise, $t = t + 1$ and return to step 2.

3. SOLUTION REPRESENTATIONS AND DECODING METHODS

Previous work of PSO for CVRP used a solution representation that incorporating idea of representing each vehicle by reference point in two-dimensional Cartesian map (Ai and Kachitvichyanukul, 2007). The reference point is called **vehicle route orientation** within this paper. Route orientation of a vehicle is defined as a point in the service map that represents a certain area in which the vehicle is most likely to serve. As a consequence, a vehicle route will tend to aggregate around its corresponding route orientation. A simple illustration of relationship between vehicle route and route orientation is shown in Figure 1. It is seen that each vehicle covers certain service area that can be represented by the route orientation point. The computational result of previous work of PSO for CVRP also showed that the idea of vehicle route orientation is effective for problems with clustered customers.

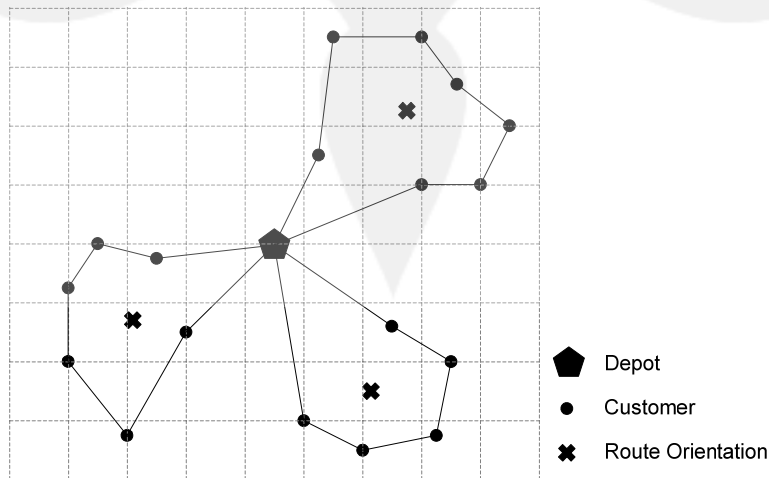


Figure 1. Vehicle Routes and Route Orientation

This paper explored further the idea of vehicle route orientation by proposing three different solution representations and testing them on VRP with clustered customers. These representations are using the same idea of vehicle route orientation in which a particle will consist of $2m$ dimensions representing m vehicles. In the decoding process, every two dimensions of position are transformed to a vehicle route orientation point on a Cartesian map. The differences among these representations are related to the additional dimensions of particle and the specific steps in the decoding method for constructing vehicle routes.

The basic mechanism of the proposed decoding methods is illustrated in Figure 2. Three steps are taken in order to decode the solution representation into VRP solution. First, extract customer list data or customer coordinate from the problem information or the corresponding particle position to make a priority list of customers. Second, convert the corresponding $2m$ dimensions into the route orientation point of vehicles and use this information altogether with the customer coordinate to create priority matrix of vehicles. Third, construct the vehicle routes based on the customer priority list and vehicle priority matrix.

The major differences among the decoding method of the three solution representations (A, B, and C), are also shown in Figure 2. In step 1 of the decoding method, solution representations A and B only used the problem information such as customer list data and customer coordinate, while solution representation C is using both the problem information and particle position. The details of each solution representations and decoding step will be discussed in the following sub-sections.

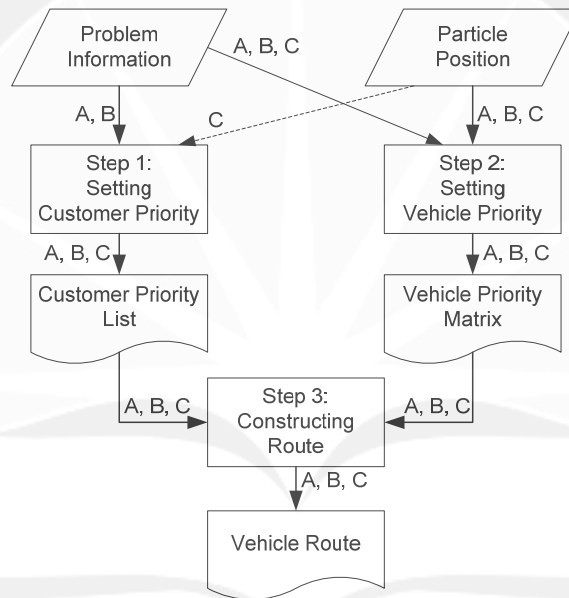


Figure 2. Basic Mechanism of the Proposed Decoding Method

3.1 Solution Representations

Solution representations A and B are different with solution representation C in term of the numbers of particle dimension. While the solution representation A and B use $2m$ dimensional particle, the solution representation C needs $2m+n$ dimensional particle to represent solutions for VRP with n customers and m vehicles. Each particle dimension is encoded as a real number. For all representations, the $2m$ dimensions are related to vehicles, each vehicle is represented by two dimensions. These dimensions will be extracted as the orientation point of vehicles in the Cartesian map.

Especially for representation C, the n dimensions represent priorities of customers; each customer is represented by one dimension. The values in these dimensions will be converted to customer priority list in the decoding step. For representation A and B, the customer priority list is constructed based on the problem information only since there is no dimension in the particle related to the customers. The summary of solution representations and its main conversion are displayed in Figure 3.

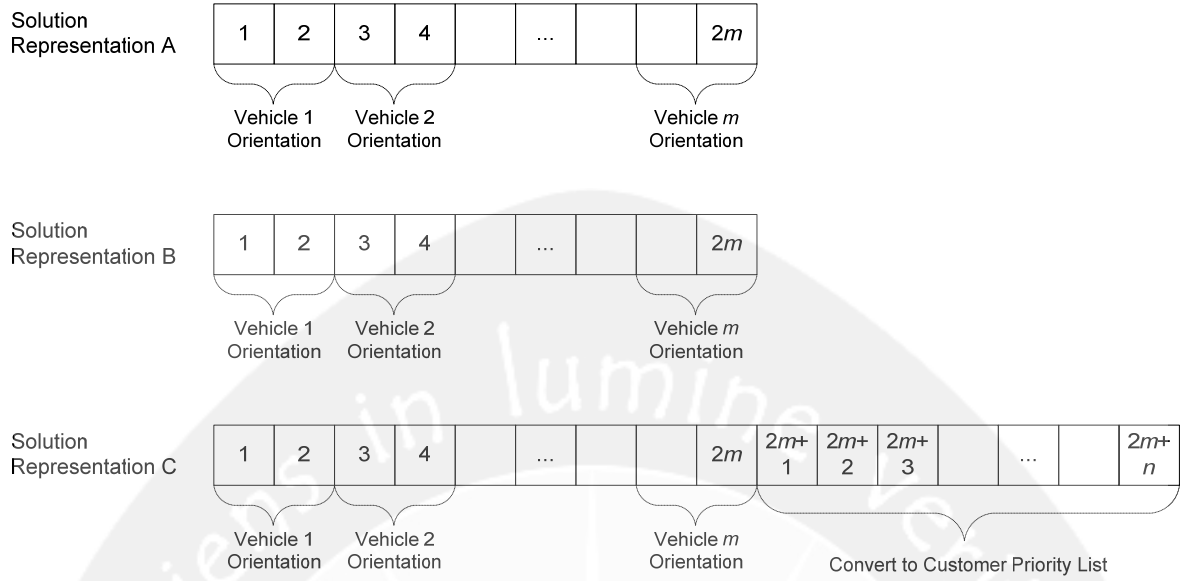


Figure 3. Solution Representations and Its Conversion

3.2 Decoding Method Step 1

The first step of decoding method is setting a priority list of customers. Each solution representation is using different method to create the customer priority list. The customer list data, which is a list of customer ID in the original problem data set, is directly used as the customer priority list for solution representation A; The customer list data is preprocessed according to its polar angle as the customer priority list for solution representation B; The n dimensions of particle is converted to the customer priority list for solution representation C.

No further explanation is needed for the first step of decoding method for solution representation A. The details of the step for solution representation B and C is presented in Algorithm 2 and 3, respectively.

Algorithm 2: Step 1 of Decoding Method for Solution Representation B

1. Calculate the polar angle of each customer relative to the depot.
2. Sort the customer index based on its polar angle in ascending order.
3. Take the sorted customer index as the customer priority list.

Algorithm 3: Step 1 of Decoding Method for Solution Representation C

1. Take out the last n dimension of position value as the corresponding position value of customers.
2. Sort the customer index based on its corresponding position value in ascending order.
3. Take the sorted customer index as the customer priority list.

Note that the customer priority list for solution representations A and B remain the same for all particles during overall iterative process. Hence, it is only predetermined once before the iteration process begin. In term of computational effort, this is an advantage of these solution representations over the solution representation C in which the customer priority list must be updated for every particles in each iteration.

3.3 Decoding Method Step 2

The second step is to extract the route orientation point of vehicles and to construct the priority matrix of vehicle. The matrix is constructed based on the relative distance between these points and customers location. The distance can be calculated as long as the reference points and the customer locations are placed in the same Cartesian map. A customer is prioritized to be served by vehicle with closer distance. For convenience of the subsequent step, each row in the matrix keeps the vehicle priority for serving customer with the same index in the customer priority list.

This step is identical for all representations, since the representations are using the same $2m$ dimensions of particle to represent m orientation points. The detail of this step is explained in Algorithm 4.

Algorithm 4: Step 2 of Decoding Method

1. Take out the $2m$ dimension of position value as the vehicle route orientation points.
2. For each customer in the customer priority list:
 - a. Calculate the Euclidean distance between the customer and vehicle route orientation points.
 - b. Sort the vehicle index based on its Euclidean distance in ascending order.
 - c. Take the sorted vehicle index as the corresponding row for the customer in the vehicle priority matrix.

3.4 Decoding Method Step 3

The last decoding step is to construct routes based on the customer priority list and the vehicle priority matrix. One by one each customer in the customer priority list is assigned to a vehicle based on its priority and other problem constraints, such as vehicle capacity constraint, service duration constraint, and time window constraint. This newly assigned customer may be inserted to the best sequence in the existing vehicle route based on the least additional cost. This heuristic is usually called the cheapest insertion heuristic. Another effort to improve solution quality of the route is to re-optimize the emerging route using some improvement heuristic methods, i.e. 2-opt method. The detail of this step is described in Algorithm 5. This step is also identical for all representations.

Algorithm 5: Step 3 of Decoding Method

For each customer in the customer priority list, starting from the first to the last priority:

1. Set j as the first vehicle priority of the customer.
2. Make a new candidate route by inserting the customer to the position which has the smallest additional cost in route j .
3. Check feasibility of the candidate route by evaluating all constraints: vehicle capacity, service duration, and time window constraints.
4. If a feasible solution is reached, update route j with the candidate route and re-optimize emerging route with 2-opt method; then return to step 1 with the next customer.
5. If the candidate route is infeasible, set j as the next vehicle priority of the customer; then go to step 2.

4. COMPUTATIONAL EXPERIMENTS

Computational experiment is conducted in order to evaluate the effectiveness of each solution representations. All solution representations are tested using the same PSO Algorithm (Algorithm 1 in section 2) and the same benchmark problems of CVRP and VRPTW. Four problems with clustered customers from the CVRP benchmark data (Christofides, 1979) are used, which are consists of 100 customers (vrpnc12 and vrpnc14) and 120 customers (vrpnc11 and vrpnc13). For VRPTW case, seventeen problems of 100 customers from benchmark data of Solomon (1987) are used (C101 – C109, C201 – C208).

The algorithm is implemented in C# language using Microsoft Visual Studio.NET 1.1 on a PC with Intel P4 3.4 GHz – 1 GB RAM. For each data set, 5 replications of the algorithm are tried. The PSO parameters are set similar with the previous work of Ai and Kachitvichyanukul (2007). The parameters are: Number of Particle, $I = 100$; Number of Iteration, $T = 1000$; Number of Neighbor, $K = 5$; First inertia weight, $w(1) = 0.9$; Last inertia weight, $w(T) = 0.4$; Personal best position acceleration constant, $c_p = 0.5$; Global best position acceleration constant, $c_g = 0.5$; Local best position acceleration constant, $c_l = 1.5$; Near neighbor best position acceleration constant, $c_n = 1.5$. The range of initial position is $[X^{\min}, X^{\max}] = [0, 100]$, since the position of customer and depot in the map for all problem is located within this range.

Summary of the computational result is presented in Table 1 comprise of the average of objective function values, the percentage deviation of the average values from the best known solution (% Dev), and the standard deviation of the objective function of each instance using three proposed solution representations. The percentage of deviation from best-known solution is calculated by the following equation:

$$\% Dev = \frac{\varphi - \varphi^*}{\varphi^*} \times 100\% \quad (5)$$

where

- % Dev : Percentage of deviation from best-known solution
- φ : Objective function of current solution
- φ^* : Objective function of best known solution

Information about the best known solution for CVRP instance is obtained from the VRP-Web (<http://neo.lcc.uma.es/radi-aeb/WebVRP/index.html?/results/BestResults.htm>) and for VRPTW is obtained from the Solomon's website (<http://web.cba.neu.edu/~msolomon/problems.htm>).

The best found solution among iterations and the average computation time (displayed as minutes: seconds) for each instance using three proposed solution representations is summarized in Table 2.

Table 1. Summary of PSO Solution: Average, % Dev, and Standard Deviation

Instance	Best Known Solution	Average PSO Solution			% Dev of PSO Solution			Standard Deviation		
		A	B	C	A	B	C	A	B	C
vrpnc11	1042.11	1070.05	1069.87	1055.68	2.68%	2.66%	1.30%	10.44	0.00	8.54
vrpnc12	819.56	839.43	832.29	821.90	2.42%	1.55%	0.29%	0.48	18.97	2.18
vrpnc13	1541.14	1604.55	1588.28	1572.32	4.11%	3.06%	2.02%	9.20	13.18	6.71
vrpnc14	866.37	903.87	877.00	874.08	4.33%	1.23%	0.89%	11.56	2.30	9.06
C101	827.3	828.94	828.94	828.94	0.20%	0.20%	0.20%	0.00	0.00	0.00
C102	827.3	847.80	981.64	828.94	2.48%	18.66%	0.20%	8.82	22.65	0.00
C103	826.3	865.87	883.57	828.94	4.79%	6.93%	0.32%	12.53	11.43	0.00
C104	822.9	933.46	888.83	828.94	13.44%	8.01%	0.73%	32.72	3.55	0.00
C105	827.3	828.94	828.94	828.94	0.20%	0.20%	0.20%	0.00	0.00	0.00
C106	827.3	828.94	890.03	828.94	0.20%	7.58%	0.20%	0.00	26.55	0.00
C107	827.3	828.94	828.94	828.94	0.20%	0.20%	0.20%	0.00	0.00	0.00
C108	827.3	855.92	853.62	828.94	3.46%	3.18%	0.20%	1.79	0.00	0.00
C109	827.3	858.88	973.04	828.94	3.82%	17.62%	0.20%	0.00	30.03	0.00
C201	589.1	591.56	591.56	591.56	0.42%	0.42%	0.42%	0.00	0.00	0.00
C202	589.1	638.14	910.91	591.56	8.32%	54.63%	0.42%	0.00	32.91	0.00
C203	588.7	807.21	806.37	594.79	37.12%	36.97%	1.03%	0.00	35.21	4.95
C204	588.1	759.79	769.54	590.60	29.19%	30.85%	0.42%	10.69	0.00	0.00
C205	586.4	714.88	680.59	588.88	21.91%	16.06%	0.42%	14.83	0.00	0.00
C206	586.0	691.31	693.43	588.49	17.97%	18.33%	0.43%	0.00	6.34	0.00
C207	585.8	606.32	621.63	588.29	3.50%	6.12%	0.42%	0.00	0.00	0.00
C208	585.8	627.01	652.23	588.32	7.03%	11.34%	0.43%	0.00	0.00	0.00

Table 1 shows that the average objective function value of solution representation A and B is quite similar. It is also shown that the objective function values obtained from these representations are worse than the objective function values obtained from algorithm using solution representation C. This finding is emphasized by the analogous pattern of the best found objective function value in Table 2, in which the result of solution representation C is better than the result of solution representation A and B. The best found objective function of solution representation is C very close to the best known solution, in most case less than 0.5% deviation from the best known solution.

In term of standard deviation of the objective function value, Table 1 shows that the solution representation C also outperformed solution representations A and B. The standard deviation of C is generally smaller than A and B for each instance. More over, the standard deviation of C is consistently small, while unstable standard deviation is shown in the result of A and B. The results with small standard deviation demonstrate the robustness of the proposed method since the solutions among replications are very consistent even though the method is a random search algorithm.

It is evident from the average and standard deviation of the objective function value that solution representation C gives better solution than solution representations A and B. The better result may come from the method for constructing the customer priority list. Solution representation C has advantage of more degree of freedom for constructing the customer priority list. It incorporates n dimensions of position, in which numerous combinations of customer priority list could be constructed, while the others only used single customer priority list throughout the iteration process. It means that more diverse solutions could be generated during iteration process using solution representation C, since different customer priority list may lead to different solutions. This diversification of solutions will increase the possibility to find a better solution.

Table 2. Best Found Solution and Average Computational Time

Instance	Best Known Solution	Best Found PSO Solution			% Dev of Best Found			Average Time (minutes)		
		A	B	C	A	B	C	A	B	C
vrpnc11	1042.11	1061.56	1069.87	1045.52	1.87%	2.66%	0.33%	02:12	02:10	03:25
vrpnc12	819.56	838.91	823.38	820.62	2.36%	0.47%	0.13%	01:29	01:29	02:29
vrpnc13	1541.14	1597.90	1569.93	1567.13	3.68%	1.87%	1.69%	02:48	02:46	03:27
vrpnc14	866.37	884.61	874.00	867.73	2.11%	0.88%	0.16%	01:48	02:01	02:35
C101	827.3	828.94	828.94	828.94	0.20%	0.20%	0.20%	03:52	03:49	03:49
C102	827.3	843.86	950.46	828.94	2.00%	14.89%	0.20%	03:30	04:27	03:47
C103	826.3	852.17	875.92	828.94	3.13%	6.00%	0.32%	03:20	03:26	03:31
C104	822.9	898.13	886.72	828.94	9.14%	7.76%	0.73%	03:01	03:05	03:13
C105	827.3	828.94	828.94	828.94	0.20%	0.20%	0.20%	03:39	03:37	03:40
C106	827.3	828.94	864.32	828.94	0.20%	4.47%	0.20%	03:37	04:50	03:45
C107	827.3	828.94	828.94	828.94	0.20%	0.20%	0.20%	03:28	03:11	03:34
C108	827.3	852.72	853.62	828.94	3.07%	3.18%	0.20%	03:33	03:22	03:36
C109	827.3	858.88	941.97	828.94	3.82%	13.86%	0.20%	03:00	03:51	03:28
C201	589.1	591.56	591.56	591.56	0.42%	0.42%	0.42%	11:22	10:06	09:29
C202	589.1	638.14	875.14	591.56	8.32%	48.56%	0.42%	10:31	15:34	09:47
C203	588.7	807.21	790.63	591.17	37.12%	34.30%	0.42%	11:07	14:30	10:01
C204	588.1	751.99	769.54	590.60	27.87%	30.85%	0.42%	11:19	11:04	09:11
C205	586.4	708.24	680.59	588.88	20.78%	16.06%	0.42%	10:25	10:10	09:28
C206	586.0	691.31	690.60	588.49	17.97%	17.85%	0.43%	08:55	10:21	09:25
C207	585.8	606.32	621.63	588.29	3.50%	6.12%	0.42%	09:33	10:45	09:01
C208	585.8	627.01	652.23	588.32	7.03%	11.34%	0.43%	09:18	09:17	09:27

The computational time for all solution representation is generally reasonable short. It is shown in Table 2 that the computational time for CVRP instances are not more than 4 minutes, for VRPTW-C1xx instances are less than 5 minutes, and for VRPTW-C2xx instances are less than 16 minutes.

The hypothesis that the solution representations A and B lead to faster time than that obtained from solution representation C due to the effort to set the customer priority list is only demonstrated by the result of CVRP instances. It is clearly shown in Table 2 that the average computational time of solution representation A and B for CVRP instances are quite similar, while the solution representation C gives longer computational time. However, the hypothesis is not confirmed for the case of VRPTW since the computational time for all representations are mostly similar and there is no clear pattern in the computational time results. This result implies that the step of setting customer priority list is dominant in CVRP case, while it is not dominant in VRPTW case. The step for route construction is dominating the computational effort in the VRPTW case, in which extra effort for constraints checking is required.

It is also shown in Table 2 that the VRPTW-C2xx instances required much longer computational time than VRPTW-C1xx instances even though all instances are considering the same number of customers. This difference may come from the different number of vehicles and the computational process related to the number of vehicles. Note that instances C1xx use 10 vehicles to serve 100 customers, while instances C2xx use 3 vehicles to serve 100 customers. Smaller number of vehicles can reduce the computational effort in the step of setting vehicle priority, but it will increase the computational effort in the step for route construction. The effort reduction in the setting of vehicle priority is related to the distance calculation and sorting procedures, where the smaller number of vehicles leads to the faster procedures. The effort in the route construction step is for finding the best insertion point and re-optimizing using 2-opt method. The smaller number of vehicles means the larger number of customers in one route and it causes these steps to be slower. This computational result showed that the time required to construct the route is dominating the time required to set vehicle priority, so that the computational time for VRPTW-C2xx instances are longer than VRPTW-C1xx instances.

5. CONCLUSION

The computational result shows that the PSO with the solution representation that incorporating random-key to build the customer priority list is very effective to solve the VRP with clustered customers. The effectiveness of the proposed method comes from the idea of vehicle orientation, route construction heuristics, and the simplicity of the PSO. The vehicle orientation ensures that the constructed route will cover only a narrow area. The route construction heuristics is

capable to increase the solution quality of the route. Also, the structure and mechanism of PSO are facilitating to generate diverse solutions and always maintaining or improving the best found solution.

The computational time aspect of the proposed algorithm need to be further improved. The details of the algorithm and programming implementation need to be studied further, since some problem instances, i.e. VRPTW-C2xx instances, still required long computational time. The main objective of this further study would be improving the algorithm and programming implementation in order to reduce the computational time without reducing solution quality.

Some further research for applying the proposed method to other VRP variants or type of problem is promising. Since the variants of VRP differ from one another only on the specific problem constraints, the only adjustment needed is at the constraint feasibility checking on the decoding method. However, the effectiveness of this idea should be further assessed.

REFERENCES

1. Ai, T.J. and Kachitvichyanukul, V. (2007). A Particle Swarm Optimization for the Capacitated Vehicle Routing Problem. Proceedings of the 3rd International Congress on Logistics and SCM System, pp. 205-212.
2. Chen, A.L., Yang, G.K., and Wu, Z.M. (2006). Hybrid Discrete Particle Swarm Optimization Algorithm for Capacitated Vehicle Routing Problem. Journal of Zhejiang University SCIENCE A, 7: 607-614.
3. Christofides, N., Mingozzi, A., and Toth, P. (1979). The vehicle routing problem. In Combinatorial Optimization (Eds.: Christofides, N., Mingozzi, A., Toth, P., and Sandi, C.), John Wiley & Sons, Chicester, pp. 315-338.
4. Clerc, M. (2006). Particle Swarm Optimization. ISTE, London.
5. Kennedy, J. and Eberhart, R. (1995). Particle swarm optimization. Proceedings of IEEE International Conference on Neural Networks, Vol. 4, pp. 1942-1948.
6. Kennedy, J. and Eberhart, R.C. (2001). Swarm Intelligence. Morgan Kaufmann Publishers, San Francisco.
7. Pongchairerks, P. and Kachitvichyanukul, V. (2005). A non-homogenous particle swarm optimization with multiple social structures. Proceedings of International Conference on Simulation and Modeling 2005, Paper A5-02.
8. Solomon, M.M. (1987). Algorithms for the vehicle routing and scheduling problems with time window constraints. Operations Research, 35: 254-265.