

C1_02_TELKOMNIKA_2017

by Pranowo Pranowo

Submission date: 06-Jan-2018 04:30PM (UTC+0700)

Submission ID: 900574925

File name: C1_02_TELKOMNIKA_2017.pdf (524.29K)

Word count: 1842

Character count: 9726

A Novel Space-time Discontinuous Galerkin Method for Solving of One-dimensional Electromagnetic Wave Propagations

Pranowo

Department of Informatics, Universitas Atma Jaya Yogyakarta, Jl. Babarsari 43 Yogyakarta, Indonesia
Corresponding author, e-mail: pran@mail.uajy.ac.id

Abstract

In this paper we propose a high-order space-time discontinuous Galerkin (STDG) method for solving of one-dimensional electromagnetic wave propagations in homogeneous medium. The STDG method uses finite element Discontinuous Galerkin discretizations in spatial and temporal domain simultaneously with high order piecewise Jacobi polynomial as the basis functions. The algebraic equations are solved using Block Gauss-Seidel iteratively in each time step. The STDG method is unconditionally stable, so the CFL number can be chosen arbitrarily. Numerical examples show that the proposed STDG method is of exponentially accuracy in time.

Keywords: Space-time discontinuous Galerkin, electromagnetic wave

Copyright © 2017 Universitas Ahmad Dahlan. All rights reserved.

1. Introduction

The finite element method has had a greater impact on theory and application on numerical methods during the twentieth century [1]. It has been used throughout the fields of engineering. The success of finite element method is lied on its flexibility. It can be used for solving problem with complex shape and arbitrary boundary conditions.

The achievement of the FE method is the application of the method in computational electromagnetics (CEM) remarkable, especially in static and quasi static electromagnetics [2, 3] however, the method has not produce entirely satisfactory results in time domain CEM. The governing equations of electromagnetic wave propagation are often discretized with FE method in time domain, resulting in semi algebraic equations in time, which are solved with explicit Runge Kutta family schemes or finite difference method. Explicit methods which do not require large matrix inversion were used for modeling wave propagation [4]. Difficulties of explicit methods are low order, lacking of high-frequency dissipation, and conditionally stable. In order to maintain the calculation stable, a small step size below CFL limit must be kept. Reference [5] and [6] proposed time-discontinuous Galerkin (DG) method for discretizing the temporal domain, while the spatial domain still discretized by conventional FE method. They showed that the results are very promising and the 3th order temporal discretization can be achieved.

Reference [7] developed space-time discontinuous Galerkin (STD) method for solving 1-D scalar wave propagation problems. The spatial and temporal domains are coupled strongly, 1-D wave propagation problems become 2-D problems because variable time is added as second spatial coordinate. They used unstructured triangular space-time element. They showed that $(p+1)^{th}$ order accuracy in L_2 norm can be achieved for arbitrary basis function order (p) . While this approach having good accuracies, it has difficulties in implementation of coding and extension to real 3-D problems. Reference [8] continued the work of [5] for solving elastodynamics problems, DG method was used not only for temporal domain but spatial domain also. The elastodynamics equations are transformed into velocity-displacement formulation, so the order of equations are second order in space and first order in time. The results showed that high-order accuracy can be achieved and high-frequency oscillation can be damped.

In this paper, we propose a new space-time discontinuous Galerkin method for solving one-dimensional Maxwell's equations, which can describe electromagnetic wave propagation.

The spatial and temporal domains are coupled strongly, and the high-order basis functions are tensor product of 1-dimensional Jacobi basis functions in space and time.

2. Governing Equations

In this paper, the 1-D system of transverse electric (TE) Maxwell's equations have been chosen.

$$\varepsilon \frac{\partial E_y}{\partial t} = -\frac{\partial H_z}{\partial x} ; \mu \frac{\partial H_z}{\partial t} = -\frac{\partial E_y}{\partial x} \quad (1)$$

where H_z is magnetic field, E_y is electric field, ε is permittivity μ is permeability of medium. In this paper ε and μ are kept constant and set to be equal one.

For simplicity, the governing equations are written in vector notation:

$$\frac{\partial \mathbf{q}}{\partial t} + \mathbf{A} \frac{\partial \mathbf{q}}{\partial x} = 0 \quad (2)$$

where $\mathbf{q} = [H_z \ E_y]^T$ and $A = \begin{bmatrix} 0 & 1 \\ 1 & 0 \end{bmatrix}$.

3. Numerical Method

3.1. Discretization

Inspired by work of Maerschalck [9], we extended the work to solve 1-dimensional STDG formulation. In the space-time formulation of equation (2), the variable t is considered as a third spatial variable. The dimension of the discretization is always one higher than dimension of the actual governing equations.

In our approach we divided the space-time domain into rectangular slabs $D^k = \Omega \times \Delta t$, where Ω is the spatial domain and $\Delta t = (t_n, t_{n+1})$ are the time step, see Figure 1.

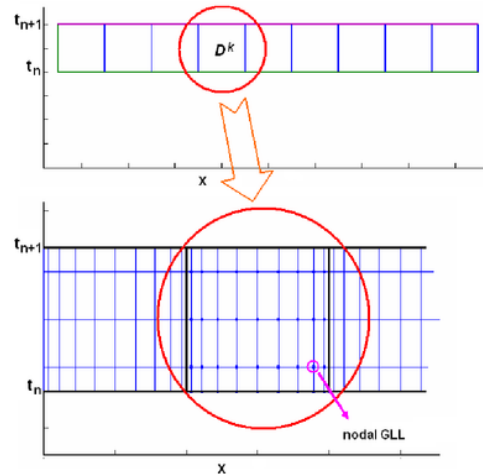


Figure 1. One-dimensional space-time slabs

The physical space-time elements are mapped into reference elements as shown in Figure 2 using mapping function:

$$\Psi(\mathbf{r}) = \mathbf{x} = \begin{pmatrix} x \\ t \end{pmatrix} = \frac{(1-r)(1-u)}{4} \begin{pmatrix} x^1 \\ t^1 \end{pmatrix} + \frac{(1+r)(1-u)}{4} \begin{pmatrix} x^2 \\ t^2 \end{pmatrix} + \frac{(1-r)(1+u)}{4} \begin{pmatrix} x^3 \\ t^3 \end{pmatrix} + \frac{(1+r)(1+u)}{4} \begin{pmatrix} x^4 \\ t^4 \end{pmatrix}$$

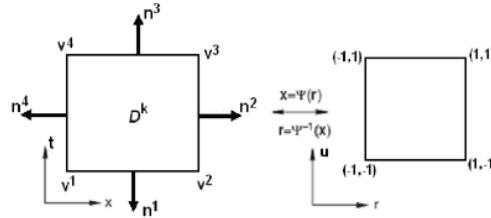


Figure 2. Mapping between physical element and standard element

For discretization, the governing equations are integrated by parts using Galerkin weighted residual method in each space-time element to obtain a discrete form of the problem.

$$\begin{aligned} & \left(l_{n_t} \frac{\partial l_m}{\partial t} \right)_{D^k} \mathbf{q}_m + \mathbf{A} \left(l_{n_x} \frac{\partial l_m}{\partial x} \right)_{D^k} \mathbf{q}_m - (l_{n_t}, l_m)_{D^k} \mathbf{f}_m \\ & - (\mathbf{I}n_t + \mathbf{A}n_x)(l_{n_t}, l_m)_{\partial D^k} (\mathbf{q}_m - \mathbf{q}^*) = 0 \end{aligned} \tag{3}$$

where l_m is nodal space-time basis function which is tensor product of Jacobi polynomial, n_t is temporal normal vector, n_x are the spatial normal vector and \mathbf{q}^* is numerical flux. In this paper, Lax-Friedrich flux was used for spatial flux and upwind flux for temporal flux. \mathbf{q} is local solution which is approximated by:

$$\mathbf{q}_h^k(\mathbf{x}) = \sum_{i=1}^{N_p} \mathbf{q}_h^k(\mathbf{x}_i^k) J_i^k(\mathbf{x}) \tag{5}$$

The discrete form of equation (3) in a space-time element can be written as follows:

$$\begin{pmatrix} \mathbf{A}_t & \mathbf{A}_x \\ \mathbf{A}_x & \mathbf{A}_t \end{pmatrix} \begin{pmatrix} E_y \\ H_z \end{pmatrix} = \begin{pmatrix} \mathbf{R}_a \\ \mathbf{R}_b \end{pmatrix} \tag{4}$$

$$\mathbf{A}_t = \mathbf{M} \frac{\partial u}{\partial t} \mathbf{D}_u + \mathbf{L}_b + \frac{1}{2} \mathbf{L}_s$$

$$\mathbf{A}_x = -\mathbf{M} \frac{\partial r}{\partial x} \mathbf{D}_r + \frac{1}{2} \mathbf{L}_s$$

$$M_{ij} = \int_{D^k} l_i(\mathbf{x}) l_j(\mathbf{x}) d\mathbf{x} = J^k \int_{D^k} l_i(\mathbf{r}) l_j(\mathbf{r}) d\mathbf{r}$$

$$(D_r)_{ij} = \frac{\partial l_j(r_i)}{\partial r} ; (D_u)_{ij} = \frac{\partial l_j(r_i)}{\partial u}$$

where \mathbf{L}_b is the matrix containing temporal flux, \mathbf{L}_s is the matrix containing Lax-Friedrich flux, and $(\mathbf{R}_a, \mathbf{R}_b)$ are residual matrices. The discrete form of Equation (4) is solved iteratively, element by element, by using Block Gauss Seidel method in each time step.

4. Results and Discussion

In this section, we demonstrate the performance of the STDG method. The following initial conditions are taken to perform numerical simulation:

$$\begin{aligned} H_z(x,0) &= -\cos(2\pi x)\cos(2\pi y) \\ E_y(x,0) &= 0 \\ 0 \leq x \leq 1 \end{aligned} \quad (5)$$

The exact solution for the electromagnetic fields are:

$$\begin{aligned} H_z(x,t) &= -\cos(2\pi x)\cos(2\pi t) \\ E_y(x,t) &= -\sin(2\pi x)\sin(2\pi t) \end{aligned} \quad (6)$$

We will discuss the rate of convergence and accuracy of the STDG method. We tried to examine the order of STDG formulation in time direction only, examination of the order in space direction can be found in [10]. The spatial domain is divided into 20 elements, the spatial polynomial order is kept constant $N_s = 4$ and temporal polynomial order is varied from $N_t = 0$ to $N_t = 3$. We used the L_2 norm as the error indicator which is defined as:

$$\|\varepsilon\|_{L^2} = \left(\int_0^1 (E_{y_{exact}} - E_{y_{STDG}})^2 dx + \int_0^1 (H_{z_{exact}} - H_{z_{STDG}})^2 dx \right)^{\frac{1}{2}}$$

We compared the error solution for varying of temporal order (N_t) on final time $t = T$. For all N_t the solution is calculated for a fixed time level $T = 2.4$, except for $N_t = 3$ the final time T is equal 2.1. The Courant-Friedrich-Lewy (CFL) number is defined as:

$$CFL = \frac{\Delta t}{\Delta x_{\min}}$$

where Δx_{\min} is the distance between two closest points. The values of Δt for different N_t are listed in Table 1.

10 Table 1. The values of Δt , Δx and CFL

$N_t=0$		$N_t=1$		$N_t=2$		$N_t=3$	
Δt	CFL	Δt	CFL	Δt	CFL	Δt	CFL
0.004	0.46	0.05000	5.79	0.200	23.17	0.7000	81.08
0.0020	0.23	0.02500	2.90	0.100	11.58	0.3500	40.54
0.0010	0.12	0.01250	1.45	0.050	5.79	0.1750	20.27
0.0005	0.06	0.00625	0.72	0.025	2.90	0.0875	10.13

The snapshots of electromagnetic fields are shown by Figures 3(a-b). Those figures described the evolution of the electromagnetic fields, actually they are standing waves. They did not propagate but oscillated.

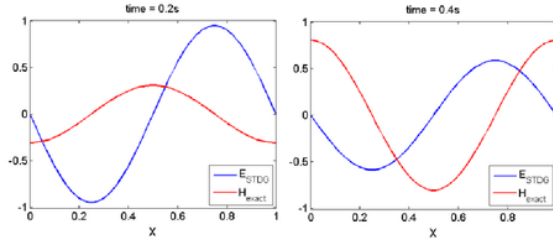


Figure 3(a). Mesh for second example

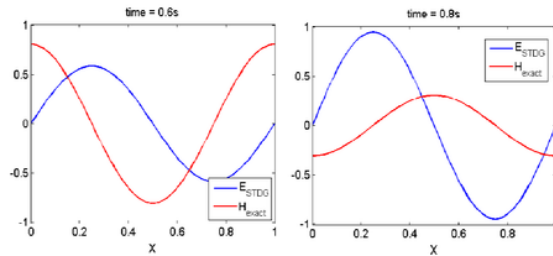


Figure 3(b). Mesh for second example

Figures 4(a) and 4(b) shows the history of convergence for various temporal polynomial order. From those figures, it can be inferred that the error can reduced significantly by increasing the order of temporal polynomial. The error increases almost linearly, it indicates that error grows slowly and numerical schemes are stable for long time calculations

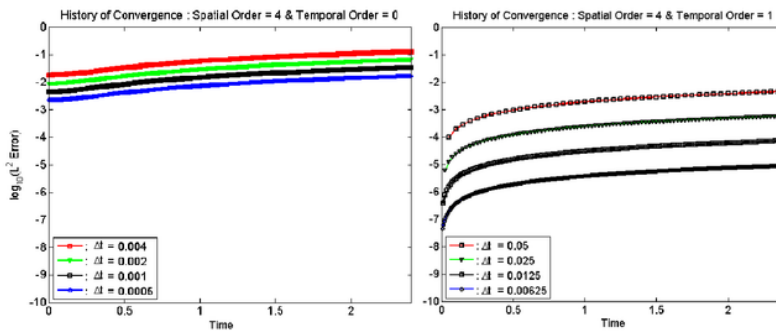


Figure 4(a). History of convergence for $N_t = 0$ and $N_t = 1$

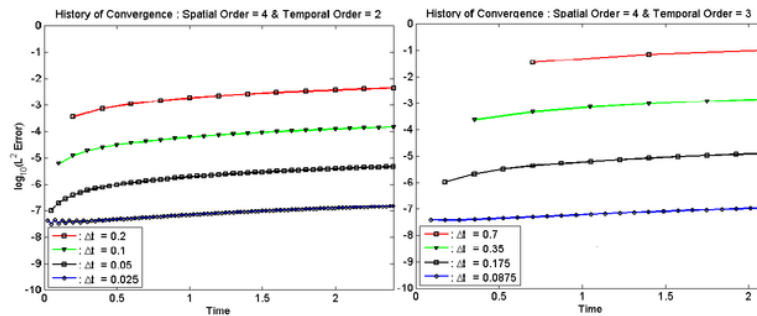
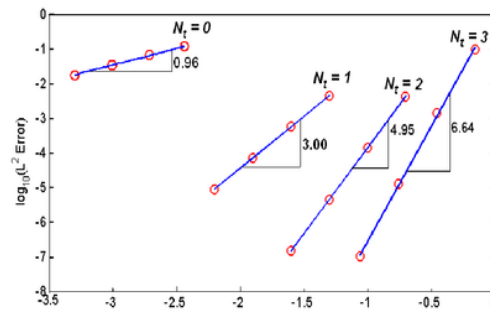
Figure 4(b). History of convergence for $N_t = 2$ and $N_t = 3$

Figure 5 indicates that optimal convergence rates of $O(\Delta t^{2N_t+1})$ are achieved.

Figure 5. L_2 norm vs. Δt

5. Conclusion

We have developed a new space-time discontinuous galerkin (STDG) method for simulation of the one-dimensional electromagnetic wave fields. The new method has high accuracy, exponential order accuracy of $O(\Delta t^{2N_t+1})$ can be achieved. Also, the new method can adopt a larger time step without any instabilities.

References

- [1] Oden JT. Finite elements: An introduction. In: PG Ciarlet, JL Lions. *Editors*. Handbook of Numerical Analysis, Vol II, Finite Element Methods (Part 1). Amsterdam: North-Holland; 1991: 3-15.
- [2] Bensalem Y, Abdelkrim MN. Modeling and Simulation of Induction Motor based on Finite Element Analysis. *International Journal of Power Electronics and Drive System (IJPEDS)*. 2016; 7(4): 1100-1109.
- [3] Musa MN, Sadiku MNO. Finite Element Approach for Coupled Striplines Embedded in Dielectric Material. *TELKOMNIKA Indonesian Journal of Electrical Engineering*. 2013; 11(1): 47-54.
- [4] Hesthaven JS, Warburton T. Nodal High-Order Methods on Unstructured Grids: I. Time-Domain Solution of Maxwell's Equations. *Journal of Computational Physics*. 2002; 181: 186-221.
- [5] Li XD, Wiberg NE. Implementation and adaptivity of a space-time finite element method for structural dynamics. *Compt. Methods Appl. Mech. Engrg*. 1998; 156: 211-229.
- [6] Thompson LL, He D. Adaptive space-time finite element methods on unbounded domains. *Compt. Methods Appl. Mech. Engrg*. 2005; 194: 1947-2000.
- [7] Palaniappan J, Haber RB, Jerrard RL. A spacetime discontinuous Galerkin method for scalar conservation laws. *Compt. Methods Appl. Mech. Engrg*. 2004; 193: 3607-3631.

-
- [8] Aksoy HG, Senocak E. Space-time discontinuous Galerkin method for dynamics of solids. *Communications in Numerical Methods in Engineering*. 2009; 24: 1887-1907.
- [9] Maerschack B. Space-time least squares spectral element method for unsteady flows. M.Sc. Thesis. Netherland: TU Delft; 2003.
- [10] Hesthaven JS, Warburton T. *Nodal Discontinuous Galerkin Methods: Algorithms, Analysis, and Applications*. New York: Springer. 2008.

C1_02_TELKOMNIKA_2017

GRADEMARK REPORT

FINAL GRADE

/0

GENERAL COMMENTS

Instructor

PAGE 1

PAGE 2

PAGE 3

PAGE 4

PAGE 5

PAGE 6

PAGE 7

ORIGINALITY REPORT

12%

SIMILARITY INDEX

7%

INTERNET SOURCES

10%

PUBLICATIONS

4%

STUDENT PAPERS

PRIMARY SOURCES

1	P TREMBLAY. "Control of discretization error for time-continuous space-time FEM through mesh movement", Computational Fluid and Solid Mechanics 2003, 2003 Publication	1%
2	www2.imperial.ac.uk Internet Source	1%
3	Submitted to Swiss German University Student Paper	1%
4	dspace.vutbr.cz Internet Source	1%
5	csdrm.caltech.edu Internet Source	1%
6	Submitted to B.S. Abdur Rahman University Student Paper	1%
7	mate.unipv.it Internet Source	1%
8	media.neliti.com Internet Source	1%

9	Bart De Maerschalck. "Higher-Order Gauss–Lobatto Integration for Non-Linear Hyperbolic Equations", Journal of Scientific Computing, 06/09/2006	1%
Publication		
10	Submitted to California State University, San Bernadino	1%
Student Paper		
11	Aniket Kate, Greg M. Zaverucha, Ian Goldberg. "Pairing-Based Onion Routing with Improved Forward Secrecy", ACM Transactions on Information and System Security, 2010	1%
Publication		
12	Xiaosen Liu, Krishnan Ravichandran, Edgar Sanchez-Sinencio. "A Switched Capacitor Energy Harvester Based on a Single-Cycle Criterion for MPPT to Eliminate Storage Capacitor", IEEE Transactions on Circuits and Systems I: Regular Papers, 2017	1%
Publication		
13	doaj.org	1%
Internet Source		
14	Charles Puelz, Béatrice Rivière. "A priori error estimates of Adams–Bashforth discontinuous Galerkin methods for scalar nonlinear conservation laws", Journal of Numerical	1%

Mathematics, 2017

Publication

15

Mao, S.. "Numerical simulation of quench propagation at early phase by high-order methods", *Cryogenics*, 200607/08

Publication

<1%

16

Ibrahim E. Abdalla. "Numerical study of transitional separated–reattached flow over surface-mounted obstacles using large-eddy simulation", *International Journal for Numerical Methods in Fluids*, 05/20/2007

Publication

<1%

17

scholar.sun.ac.za

Internet Source

<1%

Exclude quotes Off

Exclude matches Off

Exclude bibliography Off