



ANNOUNCEMENT : W

International Conference on Sustainable Civil Engineering Structures and Construction Materials

"Sustainable Structures for Future Generation"

September 5-7, 2018 | Yogyakarta, Indonesia

in conjunction with

RCCE

Regional Conference in Civil Engineering



September 5-6, 2018 | Yogyakarta, Indonesia

Malioboro Street



Universitas Gadjah Mada



Hokkaido University



Karlsruhe Institute of Technology

Main Organizer :



Universitas Gadjah Mada

Co-Organizers :



Atma Jaya Yogyakarta University



Diponegoro University



Islamic University of Indonesia



Nihon University



Parahyangan Catholic University



Petra Christian University



Sebelas Maret University



Sultan Agung Islamic University



Bandung Institute of Technology



Hasanuddin University



Sepuluh Nopember Institute of Technology



Sumatera Utara University



Tadulako University



Universiti Tun Hussein Onn Malaysia



Chulalongkorn University



Universiti Teknologi Brunei



Semarang State University



Universiti Teknologi Mara

Supporting Institutions :



Indonesian Society of Civil and Structural Engineers



Asian Concrete Federation



Japan Society of Civil Engineers



International Federation for Structural Concrete



International Association for Bridge and Structural Engineering

CONFERENCE GENERAL INFORMATION

Title of the conference : International Conference on Sustainable Civil Engineering Structures and Construction Materials (SCESCM) 2018

Date of the conference : September 5-7, 2018

Location of the conference : Royal Ambarrukmo Hotel, Yogyakarta, Indonesia

Scientific Editors :

Dr. Ali Awaludin (CHAIR)

Department of Civil and Environmental Engineering
Faculty of Engineering
Universitas Gadjah Mada
Grafika Street, No. 2, UGM campus
Sleman, Yogyakarta, 55281
Indonesia
Email: ali.awaludin@ugm.ac.id

Prof. Dr. Takashi MATSUMOTO

Laboratorium of Bridge and Structural Engineering
Devison of Engineering and Policy for Sustainable Environment
Faculty of Engineering
Hokaido University
Kita 13, Nishi 8, Kita-ku, Sapporo
060-8628 Hokkaido
E-mail: takashim@eng.hokudai.ac.jp

Dr. H.M. Jonkers

CiTG - Microlab
Delft University of Technology
P.O. Box 5048
NL - 2600 GA Delft
The Netherlands
E-mail: h.m.jonkers@tudelft.nl

Prof. Dr. Stephen Pessiki

Department of Civil and Environmental Engineering
13 E. Packer Avenue
Lehigh University
Bethlehem PA 18015
USA
E-mail: pessiki@lehigh.edu

Dr. Suprpto Siswosukarto

Department of Civil and Environmental Engineering
Faculty of Engineering
Universitas Gadjah Mada
Grafika Street, No. 2, UGM campus
Sleman, Yogyakarta, 55281
Indonesia
Email: suprpto.siswosukarto@ugm.ac.id

Dr. Angga Fajar Setiawan

Department of Civil and Environmental Engineering
Faculty of Engineering
Universitas Gadjah Mada
Grafika Street, No. 2, UGM campus
Sleman, Yogyakarta, 55281
Indonesia
Email: angga.fajar.s@mail.ugm.ac.id

Kartika Nur Rahma Putri, S.T., M.T.

Department of Civil and Environmental Engineering
Faculty of Engineering
Universitas Gadjah Mada
Grafika Street, No. 2, UGM campus
Sleman, Yogyakarta, 55281
Indonesia
Email: kartikanurrahmaputri@ugm.ac.id

Sponsored by



PT ADHI KARYA (Perseri)



PT CIGADING HABERM CENTRE
Steel Fabricator and Manufacturer

ibet

Culvert/precast
products/moulding/
batching plant



SKIT

The 4th SCESCM

Sustainable Structures for Future Generation

in conjunction with

RCCE

Sponsored by



PAMA



PT KIKI (Perseri)



PT. PP (Perseri) Tbk



TAMARA
OVERSEA
CORP



Statement of Peer Review

In submitting conference proceedings to MATEC Web of Conferences, I certify to the Publisher that I adhere to the **Policy on Publishing Integrity** of the journal in order to safeguard good scientific practice in publishing.

1. All articles have been subjected to peer review administered by the proceedings editors.
2. Reviews have been conducted by expert referees, who have been requested to provide unbiased and constructive comments aimed, whenever possible, at improving the work.
3. Proceedings editors have taken all reasonable steps to ensure the quality of the materials they publish and their decision to accept or reject a paper for publication has been based only on the merits of the work and the relevance to the journal.

Title, date and place of the conference

Title of the conference :

International Conference on Sustainable Civil Engineering Structures and Construction Materials (SCESCM) in conjunction with Regional Conference in Civil Engineering (RCCE).

Date of the conference :

September 5-7, 2018

Place of the conference:


Royal Ambarrukmo Hotel, Yogyakarta Indonesia

Proceedings editors

1. Dr. Ali Awaludin, Universitas Gadjah Mada, Indonesia
2. Prof. Takashi Matsumoto, Hokkaido University, Japan
3. Dr. Stephen Pessiki, Lehigh University, USA
4. Dr. Henk Jonkers, TU Delft, Netherlands
5. Dr. Suprpto Siswosukarto, Universitas Gadjah Mada, Indonesia
6. Dr. Angga Fajar Setiawan, Universitas Gadjah Mada, Indonesia
7. Kartika Nur Rahma Putri, S.T., M.T., Universitas Gadjah Mada, Indonesia

November, 2018

Proceedings Editors :

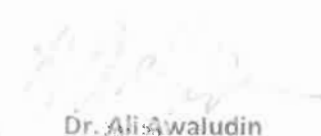


Dr. Ali Awaludin
Universitas Gadjah Mada, Indonesia

Prof. Takashi Matsumoto
Hokkaido University, Japan

Dr. Stephen Pessiki
Lehigh University, USA

Dr. Henk Jonkers
TU Delft, Netherlands

Dr. Suprpto Siswasukarto
Universitas Gadjah Mada, Indonesia



Dr. Anisa Fajar Setiawan
Universitas Gadjah Mada, Indonesia

Kartika Nur Rahma Putri, S.T., M.T.
Universitas Gadjah Mada, Indonesia

By using this website, you agree that EDP Sciences may store web audience measurement cookies

and, on some pages, cookies from social networks. [More information and setup](#)

edp sciences Journals Books Conferences

 EDPS Account



MATEC Web of Conferences

All issues Series
Forthcoming About

 Search  Menu

[All issues](#) ▶ Volume 258 (2019)

[◀ Previous issue](#)

[Table of Contents](#)

[Next issue ▶](#)

Free Access to the whole issue

MATEC Web of Conferences

Volume 258 (2019)

International Conference on Sustainable Civil Engineering Structures and Construction Materials (SCESCM 2018)

Yogyakarta, Indonesia, September 5-7, 2018

A. Awaludin, T. Matsumoto, S. Pessiki, H. Jonkers, S. Siswosukarto, A. Fajar Setiawan and K. Nur Rahma Putri
(Eds.)

Export the citation of the selected articles [Export](#)

[Select all](#)

Open Access

Statement of Peer review

Published online: 25 January 2019

[PDF \(95.5 KB\)](#)

Open Access

About the conference

Published online: 25 January 2019

OK

By using this website, you agree that EDP Sciences may store web audience measurement cookies

and, on some pages, cookies from social networks. [More information and setup](#)

[Green Construction Materials and Technologies, Environmental Impact and Green Design, Local and Recycled Materials](#)
[Construction Management, Construction Method and System, Optimization and Innovation in Structural Design](#)

[Forensic Engineering, Structural Health Monitoring System, Assessment and Retrofitting, Disaster Mitigation and Restoration](#)
[Hybrid and Composite Structures, Smart Materials and Structures, Special Structures](#)
[Structural Dynamics and Earthquake Engineering, Structures in Severe Environment, Structural Analysis](#)

- Green Construction Materials and Technologies, Environmental Impact and Green Design, Local and Recycled Materials

Open Access

[Sustainable cementitious materials: The effect of fly ash percentage as a part replacement of portland cement composite \(PCC\) and curing temperature on the early age strength of fly ash concrete](#) 01001

Gidion Turuallo and Harun Mallisa

Published online: 25 January 2019

DOI: <https://doi.org/10.1051/mateconf/201925801001>

[PDF \(1.451 MB\)](#) | [References](#)

Open Access

[The effect of density and height of vegetation in open channel on the Manning's coefficient](#) 01002

Maimun Rizalihadi

Published online: 25 January 2019

DOI: <https://doi.org/10.1051/mateconf/201925801002>

[PDF \(1.721 MB\)](#) | [References](#)

Open Access

[The effect of laterite stone as filler on marshall stability hot mix asphalt AC-WC](#) 01003

Istiar, Tri Joko Wahyu Adi, Sutikno, Rahmat, Martheana Kencanawati and Ilham Siara

Published online: 25 January 2019

DOI: <https://doi.org/10.1051/mateconf/201925801003>

[PDF \(1.800 MB\)](#) | [References](#)

OK

Open Access

By using this website, you agree that EDP Sciences may store web audience measurement cookies

and, on some pages, cookies from social networks. [More information and setup](#)

Madi Hermadi and Willy Pravianto

Published online: 25 January 2019

DOI: <https://doi.org/10.1051/mateconf/201925801004>

[PDF \(1.718 MB\)](#) | [References](#)

Open Access

[The Influence of Rice Husk on the Physical Properties of Portland Pozzoland Cement at the Cement Industry Scale](#) 01005

Agus Maryoto and Gathot Heri Sudibyo

Published online: 25 January 2019

DOI: <https://doi.org/10.1051/mateconf/201925801005>

[PDF \(1.640 MB\)](#) | [References](#)

Open Access

[The influence of the usage of Idpe plastic waste as fine aggregate in light concrete bricks](#) 01006

Nursyamsi Nursyamsi, Ivan Indrawan and Prasetyo Ramadhan

Published online: 25 January 2019

DOI: <https://doi.org/10.1051/mateconf/201925801006>

[PDF \(1.759 MB\)](#) | [References](#)

Open Access

[The pull-out test on knit bamboo reinforcement embedded into concrete beam](#) 01007

Devi Nuralinah

Published online: 25 January 2019

DOI: <https://doi.org/10.1051/mateconf/201925801007>

[PDF \(1.885 MB\)](#) | [References](#)

Open Access

[The sustainability of public transport operation based on financial point of view](#) 01008

Arif Budiarto

Published online: 25 January 2019

DOI: <https://doi.org/10.1051/mateconf/201925801008>

[PDF \(1.430 MB\)](#) | [References](#)

OK

Open Access

By using this website, you agree that EDP Sciences may store web audience measurement cookies

and, on some pages, cookies from social networks. [More information and setup](#)

Remigildus Cornelis, Henricus Priyosulistyo, Iman Satyarno and Rochmadi

Published online: 25 January 2019

DOI: <https://doi.org/10.1051/mateconf/201925801009>

[PDF \(1.911 MB\)](#) | [References](#)

Open Access

[A mockup unit of the an-eco budget bamboo chalet: design and cost estimation analysis](#) 01010

Hazrina Mansor, Nursuzila M. A. A. Wahab, Yazmin Sahol Hamid and Mohd Khairul Kamarudin

Published online: 25 January 2019

DOI: <https://doi.org/10.1051/mateconf/201925801010>

[PDF \(2.164 MB\)](#) | [References](#)

Open Access

[A study into flexural, compressive and tensile strength of coir-concrete as sustainable building material](#) 01011

Rilya Rumbayan, Sudarno and Adriana Ticoalu

Published online: 25 January 2019

DOI: <https://doi.org/10.1051/mateconf/201925801011>

[PDF \(1.895 MB\)](#) | [References](#)

Open Access

[Adhesion characteristics of geopolymers mortar to concrete and rebars](#) 01012

Sanjay Pareek, Hiroo Kashima, Ippei Maruyama and Yoshikazu Araki

Published online: 25 January 2019

DOI: <https://doi.org/10.1051/mateconf/201925801012>

[PDF \(2.507 MB\)](#) | [References](#)

Open Access

[Application of bio-based material for concrete repair: case study leakage on parallel concrete slab](#) 01013

Prima Yane Putri, Isao Ujike and Keiyu Kawaai

Published online: 25 January 2019

DOI: <https://doi.org/10.1051/mateconf/201925801013>

[PDF \(2.262 MB\)](#) | [References](#)

OK

Open Access

By using this website, you agree that EDP Sciences may store web audience measurement cookies

and, on some pages, cookies from social networks. [More information and setup](#)

Noorfaizah Hamzah, Nur 'Ain Mat Yusof and Muhammad Ihsan Haziq Mohd Rahimi

Published online: 25 January 2019

DOI: <https://doi.org/10.1051/mateconf/201925801014>

[PDF \(2.011 MB\)](#) | [References](#)

Open Access

[Concrete using sawdust as partial replacement of sand : Is it strong and does not endanger health?](#) 01015

Nurul Huda Suliman, Amir Atif Abdul Razak, Hazrina Mansor, Anizahyati Alisibramulisi and Norliyati Mohd Amin

Published online: 25 January 2019

DOI: <https://doi.org/10.1051/mateconf/201925801015>

[PDF \(1.974 MB\)](#) | [References](#)

Open Access

[Construction cleared land impact on air quality deterioration: quantification of soil borne dustfall and suspended particulate generation](#) 01016

Arief Sabdo Yuwono, Iskandar, Muhammad Fauzan, Elsy Gustika Buana, Agung Abdul Ra'up and Ety Herwati

Published online: 25 January 2019

DOI: <https://doi.org/10.1051/mateconf/201925801016>

[PDF \(1.978 MB\)](#) | [References](#)

Open Access

[Design and FE Modeling of UPVC Corrugated Hollow Roofing Sheet](#) 01017

Djoko Setyanto

Published online: 25 January 2019

DOI: <https://doi.org/10.1051/mateconf/201925801017>

[PDF \(2.087 MB\)](#) | [References](#)

Open Access

[Evaluation of Pervious Concrete Utilizing Recycled HDPE as Partial Replacement of Coarse Aggregate with Acrylic as Additive](#) 01018

Neslyn Lopez, Emilia Collado, Lois Alexandra Diacos and Harold Dave Morente

Published online: 25 January 2019

DOI: <https://doi.org/10.1051/mateconf/201925801018>

[PDF \(1.981 MB\)](#) | [References](#)

OK

By using this website, you agree that EDP Sciences may store web audience measurement cookies

and on some pages, cookies from social networks. More information and setup

Fundamental factors on the behaviour of bagasse ash stabilized organic soil 01019

John Tri Hatmoko and Hendra Suryadharma

Published online: 25 January 2019

DOI: <https://doi.org/10.1051/mateconf/201925801019>

[PDF \(1.862 MB\)](#) | [References](#)

Open Access

Influence of polypropylene fiber on early strength of self-compacting concrete 01020

Rahmi Karolina and Abdiansyah Putra Siregar

Published online: 25 January 2019

DOI: <https://doi.org/10.1051/mateconf/201925801020>

[PDF \(2.138 MB\)](#) | [References](#)

Open Access

Phytoremediation of heavy metal from leachate using *imperata cylindrica* 01021

Khairul Anam Moktar and Ramlah Mohd Tajuddin

Published online: 25 January 2019

DOI: <https://doi.org/10.1051/mateconf/201925801021>

[PDF \(1.632 MB\)](#) | [References](#)

Open Access

Preservation of durian timber and coconut timber with soursop leaf extract 01022

Sri Handayani, Endah Kanti Pangestuti and Ninda Adhitya Dharma

Published online: 25 January 2019

DOI: <https://doi.org/10.1051/mateconf/201925801022>

[PDF \(1.803 MB\)](#) | [References](#)

Open Access

Review of creep modelling for predicting of long-term behavior of glued-laminated bamboo structures 01023

Ngudiyono, Bambang Suhendro, Ali Awaludin and Andreas Triwiyono

Published online: 25 January 2019

DOI: <https://doi.org/10.1051/mateconf/201925801023>

[PDF \(1.619 MB\)](#) | [References](#)

OK

Open Access

By using this website, you agree that EDP Sciences may store web audience measurement cookies

and, on some pages, cookies from social networks. [More information and setup](#)

Naomi Pratiwi and Paulus Karta Wijaya

Published online: 25 January 2019

DOI: <https://doi.org/10.1051/mateconf/201925805034>

[PDF \(2.188 MB\)](#) | [References](#)

Open Access

[Effects of Surface Roughness on the Behavior of Interface between Old and New Deck Slabs Under Concentrated Load](#) 05035

Fakhruddin, Junichiro Niwa, Rudy Djamaluddin and Rita Irmawaty

Published online: 25 January 2019

DOI: <https://doi.org/10.1051/mateconf/201925805035>

[PDF \(2.457 MB\)](#) | [References](#)

MATEC Web of Conferences

eISSN: 2261-236X



[Mentions légales](#)

[Contacts](#)

[Privacy policy](#)

Fundamental factors on the behaviour of bagasse ash stabilized organic soil

John Tri Hatmoko and Hendra Suryadharma

Program Studi Teknik Sipil, Universitas Atma Jaya Yogyakarta, Jln. Babarsari No. 44 Yogyakarta

Abstract. A series of experimental programs was undertaken to investigate mechanical behaviour of bagasse ash stabilized organic soil. Preliminary experiment was done to verify the chemical and physical characteristics of bagasse ash and organic soil. The following experiment was then performed to study the improvement of unconfined compression strength of bagasse ash stabilized organic soil. In this research, three different organic soils and four different bagasse ashes were used. The soil was mixed with 10, 20 and 30% bagasse ash, then a set of unconfined compression tests were performed. In general, the results indicate that the unconfined compression strength of stabilized soil improve proportional to the percentage of bagasse ash. And, the quick lime content (CaO), ratio between quick lime and silica (CaO/SiO₂), and ratio between quick lime and the sum of silica and alumina {CaO/(SiO₂+Al₂O₃)} were the fundamental factors affecting the improvement of bagasse ash stabilized soil unconfined compression strength. The significant improvement occurs on $0.25 < (\text{CaO}/\text{SiO}_2) < 1.00$, and $0.20 < (\text{CaO}/(\text{SiO}_2+\text{Al}_2\text{O}_3)) < 0.67$. In contrast, organic content decreased unconfined compression, and maximum dry density (MDD) of stabilized soil. The addition of bagasse to the organic soil, however, does not significantly improve the unconfined compression strength, then addition of 6, 8, and 10% calcium carbide residue (CCR) was performed to the bagasse ash stabilized organic soil to get better engineering performance of stabilized soil. For 9% CCR, q_u improve from 93 to 208 kPa.

1 Introduction

Organic soil formed from weathered plants has usually low shear strength and high compressibility, then it is problematic directly used for construction projects. Practically, in construction project, the organic soil is removed and replaced by crushed stones or preloaded to improve its engineering properties. Soil improvement by admixtures such as cement, lime, calcium carbide, fly ash, rice husk ash, and bagasse ash is a good alternative [1-7]. The improvement is also popular as chemical stabilization.

Chemical stabilization of soft soil such as clay was done by addition of chemical admixtures into the soil to improve its shear strength and stiffness. Moreover, to reduce the water content of soft soil - high water content to its optimum moisture content is difficult and time consuming, addition of chemical binders is then preferable. Therefore, addition of chemical admixtures decreases the water content and improves shear strength and stiffness of soft soil. Cement, lime, fly ash, rice husk ash and bagasse ash are common admixtures that have been used as binder materials. The use of bagasse ash is interesting because it is a fine residue collected from sugar factory [3].

Bagasse ash and its combination with lime or carbide lime has been shown to successfully improve shear strength of clay as inorganic soil [8-10]. However, it is not enough literatures regarding the use of bagasse ash for stabilizing agents of organic soil. It was found that chemical stabilization of organic soil is more difficult compared to that of organic soil such as clay [11-14]. The objectives of this research was : to verify whether the engineering properties of organic soil can be improved by addition of bagasse ash; and if it was successfully performed, to investigate the improvement of unconfined compression strength of bagasse ash stabilized organic soil; and to study the important factors influencing the process of soil improvement.

A series of reactions take place resulting in dissociation of quick lime in the binder agents and the formation of calcium silicate hydrate and calcium aluminate silicate hydrate in the form of pozzolanic gels, if the admixtures such as cement, lime, fly ash, rice husk ash and bagasse ash are mixed with watered-soil. The reactions are called pozzolanic reactions. The improvement of shear strength of chemically stabilized soft soil was noted to be significantly related to the product of pozzolanic reactions. The short term product is the formation of calcium silicate hydrate whereas long term product is the production of calcium aluminate silicate hydrate. Contributions of those reactions to the

* Corresponding author: john@mail.uajy.ac.id

improvement engineering behaviour of soft soil occurs in two ways. The first way is reduction of plasticity of soft soils due to the exchange of calcium ions (Ca^{+2}) with K^{+} and Na^{+} in the soil. Second, the formation of calcium silicate hydrate and calcium-aluminate silicate hydrate due to pozzolanic reactions bind the solid particles, and hence it produces the stronger soil. For organic soil, however, the pozzolanic reactions slowly occurs because of absorbing pozzolanic material by the organic compound [13], [15,16]. The other literature [14] said that organic matter can change the structure of calcium silicate hydrate gel to delay the shear strength improvement of stabilized soil.

2. Materials and Methods

2.1. Organic Soils

Organic soils were taken from three different sites: Ketapang Regency (X), Wates (Y), and Kalasan (Z). The result sieve analysis and hydrometer, Atterberg limits, and compaction tests is summarized in Table 1.

Table 1. Soils parameters

Soils parameters	Soils		
	X	Y	Z
Liquid Limit (LL),(%)	52	35	56
Plastic Limits (PL),(%)	76	39	74
Plasticity Index (PI),(%)	24	4	18
d < 0.075mm), (%)	27	78	93
d < 0.002 mm, (%)	16	37	57
Organic Content (OC), (%)	25	13	18
Spec. Gravity (G)	2.47	2.52	2.25
Natural w. content (wn),(%)	53	22	29
Opt. w. content,(OMC),(%)	45	25	31
Max. dry density (MDD), (kN/m ³)	11.7	16.3	14.8
USCS Classification	OH	OL	OH

The soil samples were collected from the depth of 0.75 to 1 meter underground surface. The compaction curves of the soils specimens were bell-shaped curves with maximum dry density depends on organic content. The more organic content, the less the maximum dry density of soil sample. The same evidence can be seen on the specific gravity.

2.2. Bagasse Ash and Calcium Carbide

Bagasse ash was collected from Madukismo Sugar factory, then it was re-burnt with 4(four) different temperatures. The burning temperatures 50°C (B), 100°C (C), and 150°C (D), and A is the original bagasse ash. The chemical content, degree of acidity (pH), and specific gravity (G) of bagasse ashes is summarized in Table 2.

Table 2. Properties of Bagasse Ash

Bagasse Ash Properties	Bagasse Ashes			
	A	B	C	D
Silica (SiO_2), (%)	8.2	24.1	37.0	40.6
Alumina (Al_2O_3), (%)	7.1	15.3	18.6	16.7
Ferrit (Fe_2O_3), (%)	2.9	10.7	3.7	7.8
Quick lime (CaO), (%)	9.4	26.1 ^{*)}	5.9	9.6 ^{**)}
Magnesium (MgO), (%)	1.5	5.5	1.3	4.5
CaO / SiO_2	0.182	1.08	0.159	0.236
CaO/($\text{SiO}_2 + \text{Al}_2\text{O}_3$)	0.15	0.66	0.11	0.17
Loss of ignition (LOI), (%)	45.5	21.8	9.5	8.7
(SiO_2) + (Al_2O_3) + (Fe_2O_3), (%)	18.2	51.1 ^{*)}	60.1	75.1 ^{**)}
Degree of acidity (pH)	10.2	11.3	11.9	12.2
Specific Gravity (G)	2.3	2.35	2.41	2.45

Note: ^{*)} equivalent to C class Fly Ash: CaO > 20%, (SiO_2) + (Al_2O_3) + (Fe_2O_3), (50 - 60%). ^{**) equivalent to F class Fly Ash: CaO < 10%, (SiO_2) + (Al_2O_3) + (Fe_2O_3) > 75%.}

Bagasse ash A (original bagasse ash) has the highest carbon content (LOI = 45.5%) compared to the others, and bagasse D has the lowest carbon content (LOI = 8.7%). Similar pattern can be seen on the ratio between quick lime (CaO) and silica (SiO_2).

Calcium carbide residue (CCR) were taken from acetylene gas factory, its chemical content and physical properties are: CaO(62.3%), SiO_2 (0.23%), Al_2O_3 (2.21%), MgO (7.98%), Fe_2O_3 (2.09%) , d <0.075mm (98.29%), and specific gravity (2.45). The dosage of CCR 6, 8, and 10% were added to bagasse ash- organic soil mixture, and tested on unconfined compression apparatus.


2.3. Unconfined Compression

Unconfined compression tests were performed on: original organic soil specimens (X, Y, Z) ; bagasse ash soil mixtures and bagasse ash-calcium carbide-stabilized soil following ASTM D5102. In this test, 0,20% per minute strain rate were used which is usual for stabilized organic soil [17]. The specimens were prepared for soil-bagasse ash mixing, and soil-bagasse ash-calcium carbide. First, dry soil and dry bagasse ash with proportion of 10, 20, and 30% on dry weight basis, and the amount water required were added. Subsequently, 6, 8, and 10% of calcium carbide were added on the best bagasse ash-soil mixture obtained from the previous tests. Finally, unconfined compression tests were performed on the soils- bagasse ash-calcium carbide mixture.

3. Results and Discussions

3.1. Bagasse Ash – Soil Mixtures

By using test procedures discussed in the previous section, organic soils X, Y and Z were mixed with bagasse ashes A, B, C and D with the proportion of 10, 20, and 30% dry weight basis. Figures 1 – 3, are the results of unconfined compression tests of bagasse ash-soil mixtures.

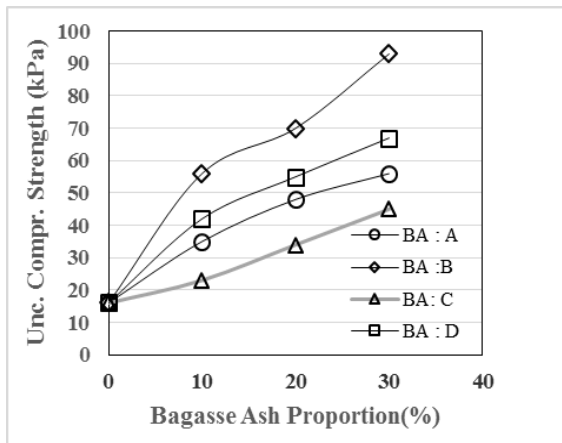

Note : BA = Bagasse Ash

Fig. 1. Unconfined Compression Strength of Soil X

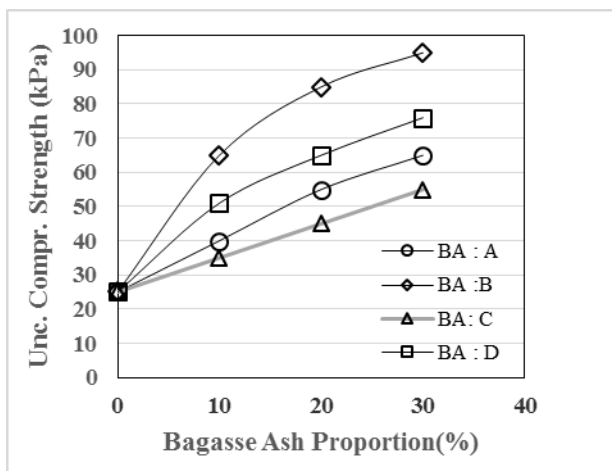


Fig. 2. Unconfined Compression Strength of Soil Y

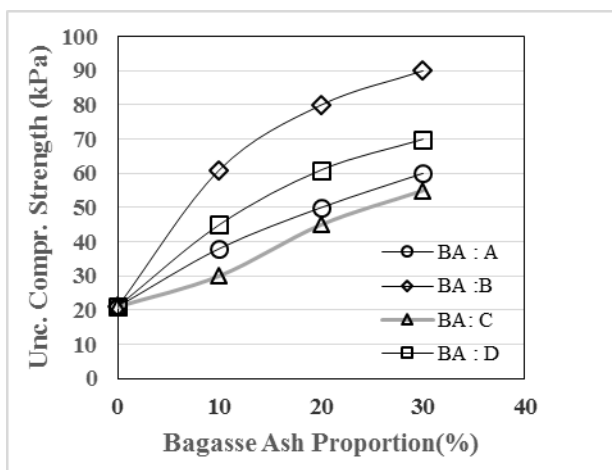


Fig. 3. Unconfined Compression Strength of Soil Z

In general, unconfined compression strength (q_u) of all stabilized soil improve proportional with the increase of bagasse ash percentage even though the improvement is not significant. However, CaO content in the bagasse ash is significant factor affecting the improvement of q_u due to self pozzolanic reaction. For example, unconfined compression strength of Z organic stabilized

soil with C bagasse ash improves from 21 to 30 kPa (bagasse ash from 0 – 10%) while with B bagasse ash the q_u improves significantly from 21 to 61 kPa.

Original unconfined compression strength of the soil samples depends on the organic content. The higher organic content (OC), the lesser the unconfined compression strength. Organic soil Y with 13% OC, its original q_u is 25 kPa whereas unconfined compression strength of soils X (OC = 25%) and Z (OC = 18%) are 16 and 21 kPa. The unconfined compression strength of all soil specimens proportional to their maximum dry density.

3.2. Effects of Bagasse Ash Characteristics

Some characteristics of bagasse that should be taken into consideration are : the degree of acidity (pH), loss of ignition (LOI), ratio between quick lime and silica (CaO/SiO₂), and the ratio between quick lime and silica + alumina [CaO/(SiO₂+Al₂O₃)]. Those fundamental characteristics are considered to improve unconfined compression strength of bagasse ash stabilized organic soils.

3.2.1. Effects of the degree of acidity (pH)

Behaviour of bagasse ash stabilized organic soil is not rely on the degree of acidity (pH) of the soil samples (Fig.4). It can be shown that the trend of unconfined compression strength is inconsistent with pH. It is different from [18], accordingly significant improvement of unconfined compression strength of blast furnace slag stabilized organic soil occur when pH is higher than 5.

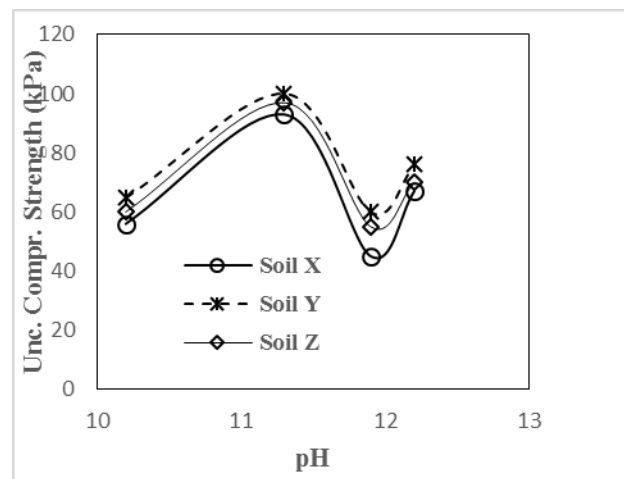


Fig. 4. Relations between Unc. Cmpr. Strength and pH

Unconfined compression strength of stabilized soils, moreover, is not dependent on loss of ignition (LOI) of stabilizing agents. For bagasse ash A (LOI= 45.5%), B(LOI = 26.8%), C(LOI=9.5%), and D(4.7%) on soil X, for example, their unconfined compression strength are 56, 93, 45 and 67 kPa respectively.

3.2.2. Effects of CaO/SiO₂

Previous discussion stated that unconfined compression strength of bagasse ash stabilized soil was strongly affected by CaO content in the admixture, with coefficient of correlation between 0.957 – 0.995. Similarly, CaO/SiO₂, also significantly contribute unconfined compression strength of stabilized soil (Fig.5). **Fig.5** represents the relations between unconfined compression strength and CaO/SiO₂ of 30% bagasse ash stabilized soil. The improvement of q_u due to CaO/SiO₂ for three soils (X, Y, and Z) has the same trends with strong correlation (0.966). The dramatic improvement of unconfined compression occur on 0.25 < CaO/SiO₂ < 1.00. Even though the trend of qu improvement of three soils are similar, Y organic soil has the highest value of unconfined compression strength. It happens because of the highest CaO content on Y soil. The same behaviour occur on the others bagasse ash dosage (10, and 20%).

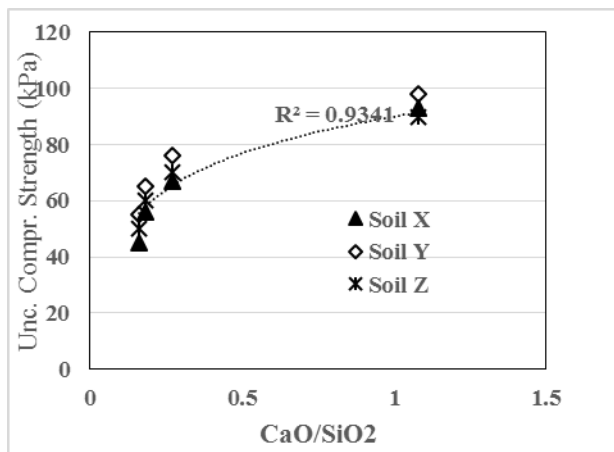


Fig. 5. Relations between Unc. Cmpr. Strength and CaO/SiO₂

Fig. 6 shows that CaO/(SiO₂+Al₂O₃) is important variable influencing unconfined compression strength of bagasse ash organic soils prepared with X, Y and Z soil samples. The improvement of unconfined compression strength are shown when 0.2 < CaO/(SiO₂+Al₂O₃) < 0.67. The q_u and CaO/(SiO₂+Al₂O₃) of stabilized soil is strongly correlated with coefficient correlation of 0.962. The trends of all soil samples show similarity even though Y soil specimens indicates the highest value.

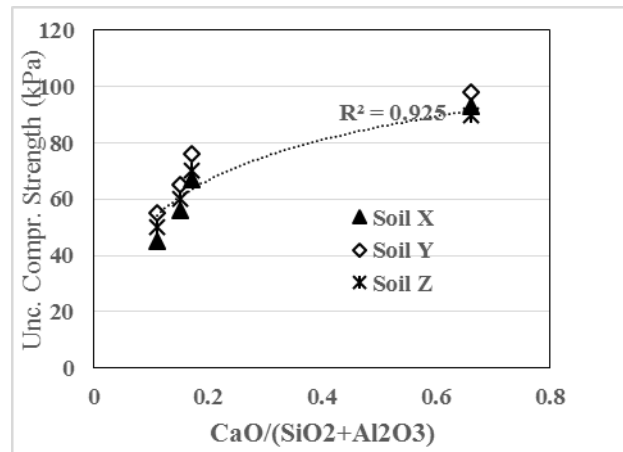


Fig. 6. Relations between Unc. Cmpr. Strength and CaO/(SiO₂+Al₂O₃)

3.3. Effects of OC and PI of Soils

Effects of organic content (OC) on soil to unconfined compression strength of bagasse ash stabilized soils specimens was shown on Fig. 7. The figure indicates that q_u of soil specimens were reciprocally affected by organic content. The unconfined compression decreases linierly with the improvement of organic content. Similar behaviour also occur on the effects of plasticity index (PI) of soil specimens to the unconfined compression strength. As PI decreased, the q_u of soil specimens increased (Fig. 8). The inverse relationship between q_u and CO reflects that solids part of soils is stronger than organic content.

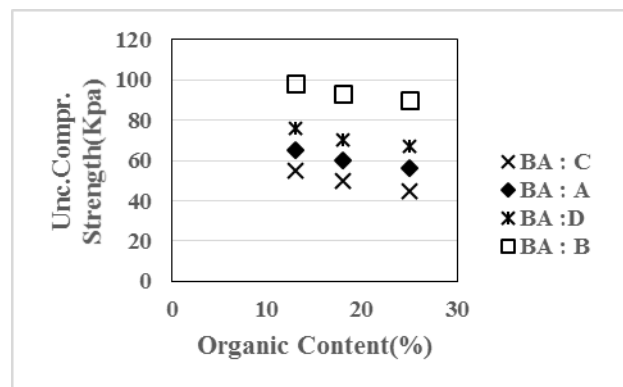


Fig. 7. Relations between Unc. Cmpr. Strength and Organic Content

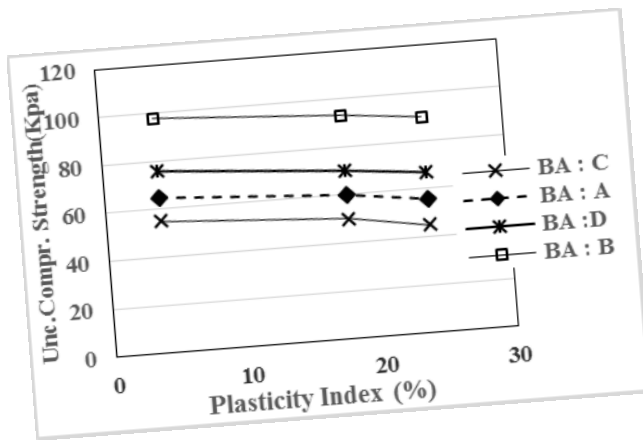


Fig. 8. Relations between Unc. Compr. Strength and Plasticity Index

3.4. Calcium Carbide (CCR) - Bagasse Ash - Soil Mixtures

To get better engineering performance of bagasse ash stabilized organic soils, 6, 8, and 10% were added to 30% bagasse ash –soil mixtures. CCR bagasse ash and soil were mixed in dry condition, then water were added upto the optimum water content. The samples, were prepared in the PVC pipe with a diameter 10 cm, and 20 cm height, then they are compacted according to standard Proctor test. The compacted samples were cured in 7 days before unconfined compression tests were performed. Prior to addition of CCR to 30% bagasse ash stabilized soil, unconfined compression strength of soil, X, Y and Z are 93, 95 and 90 kPa. After 6, 8, and 10% of calcium carbide were added to X stabilized soil, the compression strength increased to 127 (37%-gain) , 189 (103% - gain) and 195 kPa (110 %-gain). Addition the same proportion of CCR to Y stabilized soil, unconfined compression strength improve to 135 kPa (42%- gain), 201(112% -gain), and 206 kPa (117% - gain). Addition of 6% CCR to Z stabilized soil, unconfined compression strength improve to 120 kPa, 181 kPa for 8% CCR, and 188 kPa for 10% addition of CCR (Fig. 9). Those significant improvement of unconfined compression strength is basically due to intensity of pozzolanic reactions. Addition more CaO which is huge proportion on calcium carbide to the soil, formation of both calcium silicate hydrate (CSH) and calcium silicate aluminat hydrate (CSAH) that also called as pozzolanic reaction is intensively happens. These formation result on improvement of strength and stiffness stabilized soils. h

4. Conclusions

The purpose of this research were to investigate the effects of bagasse ash addition to unconfined compression strength (q_u) of organic soil, and to study some main factors influencing the engineering behavior of bagasse ash organic soil mixtures. Three organic soils and four bagasse ashes were used in this research. The following conclusions can be drawn from the study:

1. Unconfined compression strength of organic soils can be improved by adding bagasse ash. However, the percentage of improvement relies on the type of organic soils and characteristics of bagasse ashes. Significant improvement of unconfined compression strength was occurred on soil Y, whereas bagasse ash B was the best admixture for organic soils. The q_u of bagasse ash B- Y organic soil mixtures increased from 21 kPa (without bagasse ash) to 98 kPa (with 30% bagasse ash).
2. Quick lime (CaO) content, CaO/SiO_2 , and $CaO/(SiO_2+Al_2O_3)$ are the fundamental factors for unconfined compression strength of organic soil. The significant improvement occur on $0.25 < (CaO/SiO_2) < 1.00$, and $0.2 < CaO/(SiO_2+Al_2O_3) < 0.67$. CaO content and q_u are strongly correlated with correlation coefficient between 0.957 – 0.995.
3. High organic content (OC) in the soils affects the maximum dry density (MDD) decrease the MDD. Soil Y with 13% OC, its MDD is 16.3 kN/m^3 , soil Z with 18% OC its MDD is 14.8 kN/m^3 and soil X with OC (MDD = 11.3 kN/m^3)
4. Unconfined compression strength of original soils is proportional to their maximum dry density.
5. Addition of calcium carbide residue (CCR) to bagasse ash-soil mixtures increase significantly unconfined compression strength. The improvement was more than twice (93 kPa to 208 kPa, on 9% CCR dosage).

The Writers wish to express their gratitude to *Lembaga Penelitian dan Pengabdian Pada Masyarakat (LPPM) Universitas Atma Jaya Yogyakarta* for the financial support to the research group to complete the research. Special thanks is also acknowledged to the Soil Mechanics Laboratory *Fakultas Teknik Universitas Atma Jaya Yogyakarta* for supporting facilities to complete the research.

References

1. W. Diana & A.S. Muntohar., *Proc. Konferensi Nasional Teknik Sipil Ke-6*, Univesitas Trisakti Jakarta, 33-37 (2012). [in Indonesian]
2. W. Diana & A.S. Muntohar., *Proc. Konferensi Nasional Teknik Sipil Ke-7*, Univesitas Sebelas Maret Surakarta, 69-75 (2013). [in Indonesian]
3. J.T. Hatmoko, ., and Y.Lulie., *Proc. Konferensi Nasional Teknik Sipil Ke-1*, Univesitas Atma Jaya Yogyakarta , 101-109 (2007). [in Indonesian]
4. S. Horpibulsuk., J. Of Mtls in Civil Egrg., ASCE, **125** ,470-475(2013)
5. M. Janz, and S.E. Johnson, *Report 9*, Sweedish Deep Stabilization Research Center, Sweden (2012).
6. R.L. Parson, and E. Kneebone, *Ground Improvement*, **9** , 33-38 (2005).

7. M.B. Hampton., and T.B. Edil., *Soil Improvement for big digs (GSP 81)*, ASCE< Reston, PA (1998).
8. J.T. Hatmoko, ., and H. Suryadharma., *Proc. Konferensi Nasional Teknik Sipil Ke-8*,. Institut Teknologi Nasional, Bandung , 89-94 (2014). [in Indonesian]
9. Suprijono, *Majalah Media Teknik, Fakultas Teknik Universitas Gadjah Mada, No.3, XVII, Desember (1995)*. [in Indonesian]
10. C. Gerald., Kirman, and M. Amelia., *Proc. Konferensi Nasional Teknik Sipil Ke-8*,. Institut Teknologi Nasional, Bandung , 109-116 (2014) [in Indonesian]
11. S. Bin-Shafique, T. Edil., C. Benson, and A. Senol, *Proc. ICE Geotech. Eng.*, **157**, 239-249 (2004)
12. B.D. Trzebiatowski, T.B. Edil., and C.H. Benson, *Recycled Materials in geotechnics (GSP 127)*, ASCE, Reston, VA 169-175 (2005).
13. J. Prabakar, R. Dendokar, and R.K. Morchale, *Constr. Buil. Mater.* **18**, 263-267 (2004).
14. T.B. Edil, A.A. Acosta, and C.H. Benson, *J. Mater. Civ. Eng.*, **18**, 283-294 (2006).
15. H. Tremblay, J. Duchesne, J. Locat, and S. Lerouil, *Can. Geotech. J.* , **1**, 535-546 (2002).
16. K. Axelsson, S.E. Johanson, and R. Andersson, *Report 3, Swedish Deep Stabilization Research Center, Sweden (2002)*.
17. H. Odadjima, S. Noto, J. Nishikawa, and T. Yamazaki, *Proc., Int. Workshop on Engineering Characteristics and behaviour of Peat*, Sapporo, Japan (1995).
18. M. Kitazume, *Proc., Int. Conf. on Deep Mixing Best Practice and Recent Advanced Swedish Deep Stabilization Research Center, Sweden (2005)*.