



SJR

Scimago Journal &amp; Country Rank

Enter Journal Title, ISSN or Publisher Name




[Home](#)[Journal Rankings](#)[Country Rankings](#)[Viz Tools](#)[Help](#)[About Us](#)[?](#) [×](#)

## Publish with IEEE OJEMB

services from IEEE Engineering in Medicine & Biology for articles in biomedicine including

[embs.org](http://embs.org)[OPEN](#)

# Journal of Mechanical Engineering and Sciences

Country	Malaysia -  <a href="#">SJR Ranking of Malaysia</a>
Subject Area and Category	<a href="#">Energy</a> <a href="#">Energy Engineering and Power Technology</a> <a href="#">Fuel Technology</a>  <a href="#">Engineering</a> <a href="#">Computational Mechanics</a> <a href="#">Industrial and Manufacturing Engineering</a> <a href="#">Mechanical Engineering</a> <a href="#">Mechanics of Materials</a>
Publisher	<a href="#">Faculty of Mechanical Engineering, Universiti Malaysia Pahang</a>
Publication type	Journals
ISSN	22318380, 22894659
Coverage	1972, 2014-2019
Scope	<p>The Journal of Mechanical Engineering &amp; Sciences "JMES" (ISSN (Print): 2289-4659; e-ISSN: 2231-8380) is an open access peer-review journal (Indexed by Emerging Source Citation Index (ESCI), WOS; SCOPUS Index (Elsevier); EBSCOhost; Index Copernicus; Ulrichsweb, DOAJ, Google Scholar) which publishes original and review articles that advance the understanding of both the fundamentals of engineering science and its application to the solution of challenges and problems in mechanical engineering systems, machines and components. It is particularly concerned with the demonstration of engineering science solutions to specific industrial problems. Original contributions providing insight into the use of analytical, computational modeling, structural mechanics, metal forming, behavior and application of advanced materials, impact mechanics, strain localization and other effects of nonlinearity, fluid mechanics, robotics, tribology, thermodynamics, and materials processing generally from the core of the journal contents are encouraged. Only original, innovative and novel papers will be considered for publication in the JMES. The authors are required to confirm that their paper has not been submitted to any other journal in English or any other language. The JMES welcome contributions from all who wishes to report on new developments and latest findings in mechanical engineering.</p>
	<a href="#">Homepage</a> <a href="#">How to publish in this journal</a> <a href="#">Contact</a>   <a href="#">Join the conversation about this journal</a>

16

H Index


# Schoarly research journal

Accelerate global knowledge creation and sharing


iiste.org

OPEN


## Quartiles

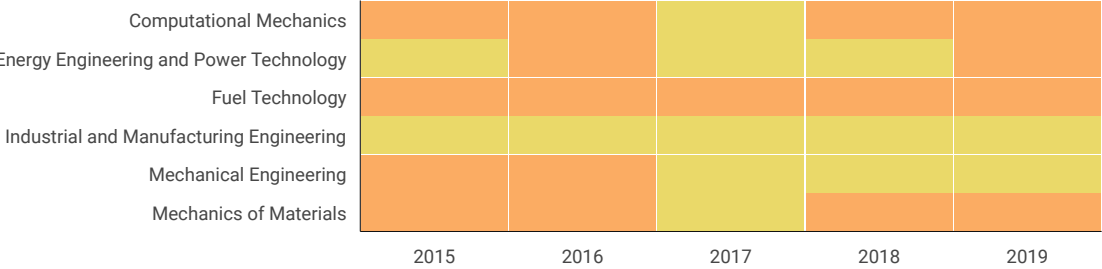


## SJR

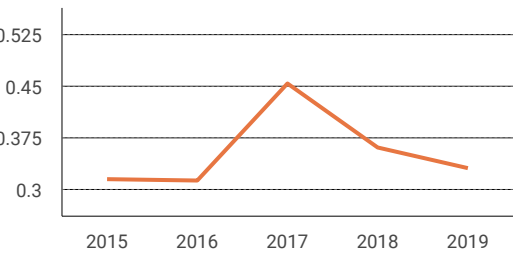


## Citations per document

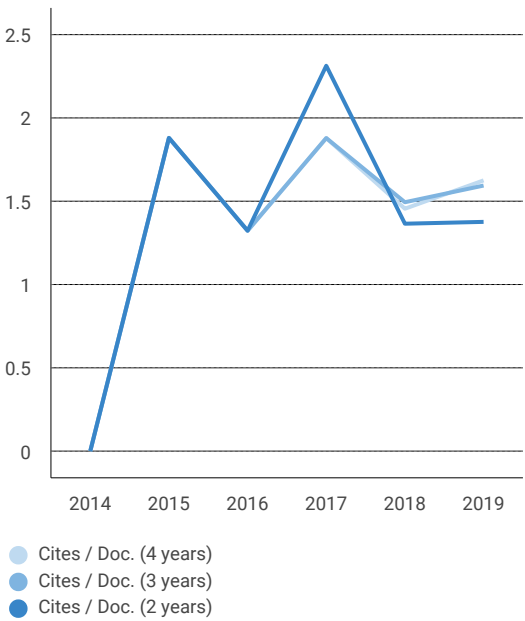


## Total Cites Self-Cites

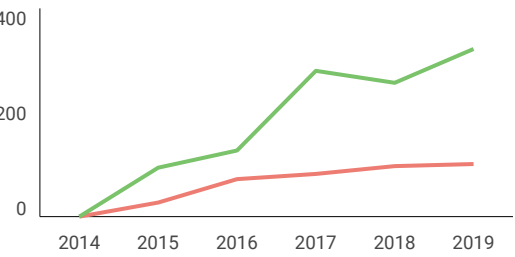

## External Cites per Doc Cites per Doc

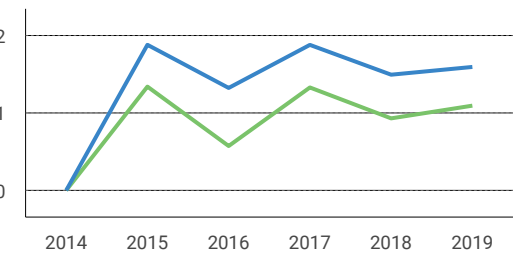

## % International Collaboration

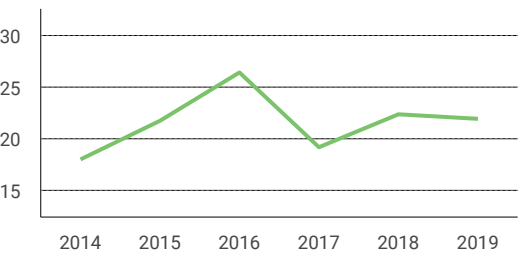

## Citable documents Non-citable documents

## Cited documents Uncited documents

400		400	
200		200	

Journal of Mechanical Engineering and Sciences

Q2

Industrial and Manufacturing Engineering

best quartile

SJR 2019

0.33

powered by scimagojr.com

← Show this widget in your own website

Just copy the code below and paste within your html code:

`<a href="https://www.scimaç`



Loading comments...

Developed by:



Powered by:



Follow us on @ScimagoJR

Scimago Lab, Copyright 2007-2020. Data Source: Scopus®



Cover JMES volume 13, issues 3 , 2019



JOURNAL OF MECHANICAL ENGINEERING AND SCIENCES (JMES)

Volume 13

Issue 3

September 2019

ISSN: 2289-4659 | e-ISSN: 2231-8380

Website: [jmes.ump.edu.my](http://jmes.ump.edu.my)

Published: 2019-09-29

## Daftar Isi JMES :

Article	
<b>A new type of magnetic pump with coupled mechanical vibration and electromagnetic force</b> Hiroyuki Yaguchi, Toshiki Mishina, Kazumi Ishikawa	5212 - 5227
<a href="#">pdf</a>	
<b>Critical lifetime of HDPE pipes through damage and reliability models</b> F. Majid, M. Elghorba	5228 - 5241
<a href="#">pdf</a>	
<b>Performance enhancement of normal contact ratio gearing system through correction factor</b> R. Ravivarman, K. Palaniradja, R. Prabhu Sekar	5242 - 5258
<a href="#">pdf</a>	
<b>Modelling and control of a Magneto-Rheological elastomer for impact reduction</b> Mohd Sabirin Rahmat, Khisbullah Hudha, Zulkiiffi Abd Kadir, Nur Rashid Mat Nuri, Noor Hafizah Amer, Shohaimi Abdullah	5259 - 5277
<a href="#">pdf</a>	
<b>Analysis of LPG diffusion flame in tube type burner</b> Vipul Patel, Rupesh Shah	5278 - 5293
<a href="#">pdf</a>	
<b>Blending Poly (3-Hydroxybutyrate) with Polyethylene Glycol (PEG): Thermal behaviour and rheological study</b> Norfarisha Achim, Hazlina Husin, Zukafli Hassan	5294 - 5305
<a href="#">pdf</a>	
<b>Numerical investigations of various aspects of plaque deposition through constricted artery</b> P. Goswami, D. K. Mandal, N. K. Manna, S. Chakrabarti	5306 - 5322
<a href="#">pdf</a>	
<b>Design and development of a modular vibration test rig for combination types of fault in rotating machinery health diagnosis</b> S. M. Silahuddin, A. M. Alzaidin, S. Mohamaddan, S. T. Syed Shazali, M. S. Z. M. Suffan, A. M. Tazuddin, A. S. Abdullah	5323 - 5333
<a href="#">pdf</a>	
<b>A two degrees of freedom comb capacitive-type accelerometer with low cross-axis sensitivity</b> M. N. Nguyen, L. Q. Nguyen, H. M. Chu, H. N. Vu	5334 - 5346
<a href="#">pdf</a>	
<b>CNC milling of EVA foam with varying hardness for custom orthotic shoe insoles and process parameter optimization</b> P. W. Anggoro, A. A. Anthony, B. Bawono, J. Jamari, A. P. Bayuseno, M. Tauvikiirrahman, A. Nugroho	5347 - 5370
<a href="#">pdf</a>	
<b>Simulation of Ti-6Al-4V cruciform welded joints subjected to fatigue load using XFEM</b> Srinivasa Reddy Vempati, K. Brahma Raju, K. Venkata Subbalah	5371 - 5389
<a href="#">pdf</a>	
<b>Failure study of the woven composite material: 2.5 D carbon fabric/ resin epoxy</b> Abderraouf Omar Gherissi	5390 - 5406
<a href="#">pdf</a>	

**The fuzzy particle swarm optimization algorithm design for dynamic positioning system under unexpected impacts**

Viet-Dung Do, Xuan-Kien Dang

5407 - 5423



**On the preparation of EPDM-g-MAH compatibilizer via melt-blending method**

J. A. Razak, N. Mohamad, M. A. Mahamood, R. Jaafar, I. S. Othman, M. M. Ismail, L. K. Tee, R. Junid, Z. Mustafa

5424 - 5440



**Influence of ball milling duration of quarry dust on the properties of nickel-quarry dust composite coating**

I. S. Othman, M. A. F. M. M. Azam, M. F. A. Bakar, M. S. Kasim, T. A. Rahman, M. R. Mohamad

5441 - 5454



**Optimal design of junctionless double gate vertical MOSFET using hybrid Taguchi-GRA with ANN prediction**

K. E. Kaharudin, F. Salehuddin, A. S. M. Zain, Ameer F. Roslan

5455 - 5479



**SS 316L/HA composite via powder injection moulding: Mechanical and physical properties**

N. A. Johari, F. R. M. Romlay, W. S. W. Harun

5480 - 5492



**Investigation of the effect of gaps between the blades of open flume Pico hydro turbine runners**

D. Adanta, Budlarso., Warjito., Emanuele Quaranta, T. M. I. Mahila

5493 - 5512



**Predictive tool for frictional performance of piston ring-pack/liner conjunction**

J. W. Tee, S. H. Hamdan, W. W. F. Chong

5513 - 5527



**Mixed convection jet impingement cooling of a moving plate**

N. H. Saeid, B. S. Busahmin, A. A. Khalid

5528 - 5541



**Effect of sand particles on flow structure of free jet from a nozzle**

M. J. Al-Dulaimi, F. A. Hamad, A. A. Abdul Rasool, K. A. Ameen

5542 - 5561



**Thermal performance enhancement of flat plate solar air heater using transverse U-shaped turbulator - A numerical study**

M. S. Manjunath, R. Venkatesh, N. Madhwesh

5562 - 5587



**Experimental investigation on thermal behavior of fly ash reinforced aluminium alloy (Al6061) hybrid composite**

S. Kushnoore, V. Atgar, P. K. C. Kanagalpula, N. Kamitkar, P. Shetty

5588 - 5600



**Computational fluid dynamic (CFD) of vertical-axis wind turbine: mesh and time-step sensitivity study**

S. Ashwindran, A. A. Azizuddin, A. N. Oumer

5604 - 5624



**Study on stripping phase conditions on the levulinic acid extraction using supported liquid membrane**

V. Rajendran, S. M. Saufi, M. A. K. Zahari, A. W. Mohammad

5625 - 5636



**Effect of heat treatment on the tribological performance of electroless quaternary nickel alloy**

M. Zaimi, M. N. Azran, M. S. Kasim, M. R. M. Kamal, I. S. Othman, K. T. Lau, T. D. Widodo, A. H. Sofan

5637 - 5652





### Latent heat storage for hot beverages

M. S. M. Al-Jethelah, H. S. Dheyab, S. Khudhayer, T. K. Ibrahim, A. T. Al-Sammarraie

5653 - 5664



### Performance analysis of multi-row vertical axis hydrokinetic turbine–straight blade cascaded (VAHT-SBC) turbines array

E. Septyaningrum, R. Hantoro, I. K. A. P. Utama, J. Prananda, G. Nugroho, A. W. Mahmasani, N. A. Satwika

5665 - 5688



### Bearing fault diagnosis employing Gabor and augmented architecture of convolutional neural network

N. Fathiah Wazirailah, Aminudin Abu, M. H. Lim, Lee Kee Quen, Ahmed Elfakrany

5689 - 5702



### Modeling and experimental validation of the vibration in an unbalance multi-stage rotor

W. Cruz, N. Arzola, O. Araque

5703 - 5716



**JMES** | ISSN: 2289-4659 (Print); 2231-8380 (Online)  
Faculty of Mechanical and Automotive Engineering Technology  
Universiti Malaysia Pahang  
26600 Pekan, Pahang, MALAYSIA

## Index :

[Home](#) • [About](#) • [Author's Guidelines](#) • [Archives](#) • [Contact](#)

### Indexing

Indexed in	
1. EMERGING SOURCES CITATION INDEX (Clarivate Analytics)	
2. SCOPUS	
3. DOAJ	
4. INDEX COPERNICUS	
5. Ulrichsweb	
6. MyJurnal	
7. Google Scholar	
8. CiteFactor (Academic Scientific Journals)	
9. EBSCOhost	
10. CNKI	

Indexed by:



ESCI, Clarivate Analytics

Journal of Mechanical Engineering and Sciences



1.86 CiteScore 2017  
77th percentile  
Powered by Scopus

Published by:



## ADVISOR

### **Professor Dr. Md. Mustafizur Rahman**

Department of Mechanical Engineering, College of Engineering  
Universiti Malaysia Pahang  
26300 Gambang, Pahang, Malaysia  
Email: [mustafizur@ump.edu.my](mailto:mustafizur@ump.edu.my)

### **Professor Dr. Mahadzir Ishak@Muhammad**

Faculty of Mechanical and Automotive Engineering Technology  
Universiti Malaysia Pahang  
26600 Pekan, Pahang, Malaysia  
Email: [mahadzir@ump.edu.my](mailto:mahadzir@ump.edu.my)

## EDITOR-IN-CHIEF

### **Dr. Nasrul Azuan Alang**

Faculty of Mechanical and Automotive Engineering Technology  
Universiti Malaysia Pahang  
26600 Pekan, Pahang, Malaysia  
Email: [jmes@ump.edu.my](mailto:jmes@ump.edu.my)

## ASSOCIATE EDITOR-IN-CHIEF

### **Dr. Ftwi Yohanness Hagos**

Department of Mechanical Engineering, College of Engineering  
Universiti Malaysia Pahang  
26300 Gambang, Pahang, Malaysia  
Email: [ftwi@ump.edu.my](mailto:ftwi@ump.edu.my)

### **Dr. Ahmed Nurye Oumer**

Department of Mechanical Engineering, College of Engineering  
Universiti Malaysia Pahang  
26300 Gambang, Pahang, Malaysia  
Email: [nurye@ump.edu.my](mailto:nurye@ump.edu.my)

### **Dr. Ahmmad Shukrie Md Yudin**

Department of Mechanical Engineering, College of Engineering  
Universiti Malaysia Pahang  
26300 Gambang, Pahang, Malaysia  
Email: [shukrie@ump.edu.my](mailto:shukrie@ump.edu.my)

### **Dr. Ummu Kulthum Jamaludin**

Faculty of Mechanical and Automotive Engineering Technology  
Universiti Malaysia Pahang  
26600 Pekan, Pahang, Malaysia  
Email: [ummu84@ump.edu.my](mailto:ummu84@ump.edu.my)



**Dr. Nasrul Hadi Johari**

Faculty of Mechanical and Automotive Engineering Technology  
Universiti Malaysia Pahang  
26600 Pekan, Pahang, Malaysia  
Email: [nhadi@ump.edu.my](mailto:nhadi@ump.edu.my)

**Dr. Mohd Shamil Shaari**

Faculty of Mechanical and Automotive Engineering Technology  
Universiti Malaysia Pahang  
26600 Pekan, Pahang, Malaysia  
Email: [shamil@ump.edu.my](mailto:shamil@ump.edu.my)

**EDITORIAL BOARD MEMBERS****Professor Dr. Rizalman Mamat**

Faculty of Mechanical Engineering  
Universiti Malaysia Pahang  
26600 Pekan, Pahang, Malaysia  
Email: [rizalman@ump.edu.my](mailto:rizalman@ump.edu.my)

**Professor Dr. Debes Bhattacharyya**

Distinguished Professor  
Director, Centre for Advanced Composite Materials,  
Department of Mechanical Engineering, The University of Auckland  
Private Bag 92019, Auckland, New Zealand  
Email: [d.bhattacharyya@auckland.ac.nz](mailto:d.bhattacharyya@auckland.ac.nz)

**Professor Dr. Duc Truong Pham**

School of Mechanical Engineering  
University of Birmingham  
Edgbaston, Birmingham, B15 2TT, UK  
Email: [d.t.pham@bham.ac.uk](mailto:d.t.pham@bham.ac.uk)

**Professor Dr. Liyong Tong**

School of Aerospace, Mechanical and Mechatronic Engineering  
The University of Sydney  
NSW 2006, Australia  
Professor Liyong Tong is a member of the editorial board of the journal.

**Professor Dr. Bernard Hon**

School of Engineering, University of Liverpool  
Liverpool L69 3GH, UK  
Email: [honkk@liverpool.ac.uk](mailto:honkk@liverpool.ac.uk)

**Professor Dr. Pean Yue Ben Jar**

Department of Mechanical Engineering  
Faculty of Engineering, University of Alberta  
Edmonton, Canada  
Email: [Ben.Jar@ualberta.ca](mailto:Ben.Jar@ualberta.ca)

**Professor Dr. Korada Viswanatha Sharma**

Centre for Energy Studies,  
J.N.T.U. College of Engineering,  
Jawaharlal Nehru Technological University,  
Hyderabad, Andhra Pradesh, India  
Email: [kvsharmajntu@gmail.com](mailto:kvsharmajntu@gmail.com)

**Professor Dr. Ahmed Al-Jumaily**

Director, Institute of Biomedical Technologies  
Professor of Biomechanical Engineering  
Auckland University of Technology  
Private Bag 92006  
Auckland, New Zealand  
Email: [ahmed.al-jumaily@aut.ac.nz](mailto:ahmed.al-jumaily@aut.ac.nz)

**Professor Dr. Ching Kong Chao**

Department of Mechanical Engineering  
National Taiwan University of Science and Technology  
43 Keelung Road, Section 4, Taipei, Taiwan  
Email: [ckchao@mail.ntust.edu.tw](mailto:ckchao@mail.ntust.edu.tw)

**Professor Dr. Md. Abdul Maleque**

Department of Manufacturing and Materials Engineering  
International Islamic University Malaysia  
53100 Gombak, Kuala Lumpur, Malaysia  
Email: [maleque@iiu.edu.my](mailto:maleque@iiu.edu.my)

**Professor Dr. Chew Yong Tian**

Deputy Executive Director  
Institute for Engineering Leadership  
Faculty of Engineering  
National University of Singapore  
Block EA, #05-03, 9 Engineering Drive 1, Singapore  
Email: [mpecyt@nus.edu.sg](mailto:mpecyt@nus.edu.sg)

**Professor Dr. Navdeep Malhotra**

Department of Mechanical Engineering  
YMCA University of Science and Technology,  
Faridabad, Haryana.(121006), INDIA  
Email: [navdeep\\_malhotra2001@yahoo.com](mailto:navdeep_malhotra2001@yahoo.com)

**Professor Dr. Md Razali Ayob**

Dean, Faculty of Mechanical Engineering  
Universiti Teknikal Malaysia Melaka  
Hang Tuah Jaya, 76100 Durian Tunggal, Melaka, Malaysia  
Email: [razali@utem.edu.my](mailto:razali@utem.edu.my)

**Professor Dr. Talal Yusaf**

Mechanical & Mechatronic Engineering  
University of Southern Queensland, Australia  
Email: [Talal.Yusaf@usq.edu.au](mailto:Talal.Yusaf@usq.edu.au)

**Associate Professor Dr. Md. Maksudur Rahman Khan**

Faculty of Chemical and Natural Resources Engineering  
Tun Razak Highway, Gambang, 26300 Kuantan  
Pahang, Malaysia  
Email: [mrkhan@ump.edu.my](mailto:mrkhan@ump.edu.my)

## **CNC milling of EVA foam with varying hardness for custom orthotic shoe insoles and process parameter optimization**

**P. W. Anggoro<sup>1\*</sup>, A. A. Anthony<sup>1</sup>, B. Bawono<sup>1</sup>, J. Jamari<sup>2</sup>, A. P. Bayuseno<sup>2</sup>,  
M. Tauviqirrahman<sup>2</sup> and A. Nugroho<sup>3</sup>**

<sup>1</sup>Department of Industrial Engineering, Faculty of Industrial Technology,  
University of Atma Jaya Yogyakarta, Jl. Babarsari 44, Yogyakarta 55281, Indonesia.

\*Email : pauluswisnuanggoro@gmail.com

Phone : +62-857 294 99 575

<sup>2</sup>Department of Mechanical Engineering, University of Diponegoro,  
Jl. Prof. Soedarto, SH., Tembalang, Semarang 50275, Indonesia.

<sup>3</sup>PUTP Politeknik ATMI Surakarta,  
Jl. Kyai Mojo 1, Surakarta, Central Java, Indonesia

### **ABSTRACT**

CNC milling strategy of EVA foam with varying hardness to provide a high degree of surface roughness of orthotic shoe insoles is presented in this work. Machining parameters (spindle speed, feed rate, tool path strategy, and step over) in addition to hardness material and wide tolerance insoles were optimized using a hybrid approach of Taguchi-Response Surface Methods (TM-RSM). The aim of this exploration was to develop mathematical models and determine the optimum machining parameters which could be applied for the CNC milling of EVA foam as the insoles. The research was implemented on the CNC milling machine with a standard milling cutter and run under dry coolants. The outcomes of the six parameters on the average values of surface roughness were initially analyzed by an S/N ratio of TM. Optimal conditions were established from the TM and then used to determine the optimum values in RSM modeling. The final results indicate the significant improvement of percentages (0.24% and 4.13%) in the surface roughness of the insoles obtained with TM-RSM as compared to the TM analysis. It is envisaged the present study would add to the understanding of production for orthotic shoe insoles through CNC milling.

**Keywords:** EVA foam; CNC milling; RSM; Taguchi; surface roughness; optimization.

### **INTRODUCTION**

EVA (Ethylene-Vinyl Acetate) foam has many applications in sports and medical engineering because of their excellent properties including good energy-absorber and high fracture toughness relative to other polymers [1]. EVA foam in sports application is typically layered with harder polymers such as polycarbonate or a composite laminate to provide an excellent performance in dumping property. Moreover, EVA foam is consistently used in advanced composites for special applications of orthotic shoe insoles. Consequently, this

material is gaining wide acceptance in the footwear industry sector, because of providing lighter weight shoes along with high comfort, resiliency, and durability [1].

Among all polymers employed as the footwear, EVA foam is effective as foot orthotics insoles for prevention of the foot pain [2], including foot ulcer which is a common and harmful problem of diabetes [3, 4]. Foot ulcers are the main cause of increasing the risk of foot infection and amputation. Therefore, these conditions may reduce the healthiness associated to life quality and significantly increases in the prices of foot caution [5]. In this way, the diabetic foot could be treated by wearing custom-made insoles, which can reduce the mechanical load upon the plantar foot ulceration during walking [6, 7]. Correspondingly, the product design, hardness property of EVA foam, and fitting of the orthotic insoles are the primary factors influencing the foot-insole interface pressures, the comfort of walking, and eventually, the effectiveness of the foot orthotics treatment [8].

Further, large differences in insole hardness may influence on the perceptual and biomechanical variables, when a diabetic patient experienced shock and impact loads. Therefore, an extensive research was performed to reduce this main factor by varying insole hardness and different feature of shoe constructions. These goals can only be achieved if an effort in developing product design of orthotic shoe insoles uses an appropriate manufacturing process, which can maintain the high production efficiency [9].

Currently, the orthotic insoles can be prescribed and made using footprints in a foam box. Nevertheless, this method is not capable to make insoles with high precision and accuracy when assembled with the patient's foot geometry, hence producing the orthotic footwear with a low comfort. Moreover, this manual method results in higher production cost and time [10]. With the rapid development of computer-aided design (CAD) technology, three-dimensional (3D) design of orthotic insoles can be made for various foot contours with providing the best fitting of the orthotic insoles and reducing production cost and design phase [11]. Additionally, the accessibility of a reverse engineering (RE) and a reverse innovative design (RID) provides the rapid production of insoles with accuracy and precision in size dimension [7, 12-13]. Here contour of the foot abnormalities can be scanned by a 3D scanner providing an accurate data of the 3D mesh, which can subsequently be used in a subtractive manufacturing process of insoles (either adaptive manufacturing using a 3D printer machine or a CNC milling machine) by [14, 15].

Further, the use of the 3D-foot scanning system, CAD and CAM (computer-aided manufacturing) for fabricating molds and custom-made orthotics apparatuses become suitable and cost-effective method [7, 16]. Consequently, the broad varieties of insole designs can be fabricated for the diabetic foot requirements. The 3D printing has been applied in CAM of an ankle-foot orthosis (AFO) yielding the AFO product with better dimensional accuracy [17-19]. This desired manufacturing step may produce orthotic insoles with the best fitting for foot patient with diabetes [7, 16, 20-21]. This need is further strengthened by determining of machining strategy which requires certain cutting parameters for yielding the acceptable surface roughness.

Correspondingly, more efficient and rapid manufacturing of bespoke products such as orthotic insoles can be acquired by CNC machining, which is preferred to pieces (unit) or smaller number production. This manufacturing method enables simple and scalable of fabrication of insoles with the best fitting. However, machining of EVA foam as orthotic insoles is a challenging process from the point of machinability because the material has anisotropic and non-homogeneous properties [1]. Unlike metal machining, the cutting of


EVA foam occurs on compressive shearing and fracture. This puts stringent requirements on the selection of machining parameters and the cutting material.

In summary, in order to complement the previous findings, the complete analysis of machining parameters, optimization and their effect on surface quality (the surface roughness) is required to provide custom-made insoles for effective offloading the foot and anticipation of foot ulcers. The optimization of the cutting parameters in CNC machining of EVA foam with varying hardness is needed to complete quality data about the insole product, which would be characterized by the perception and biomechanical variables related to the pain prevention and comfort, whereas in that respect is no report on the optimization of the cutting parameters in CNC machining of EVA foam with varying hardness. Therefore, the objective of this paper is firstly, to experimentally investigate the process parameters to obtain the desired roughness surface, and secondly, to improve the mathematic model and process parameter optimization (spindle speed, tool path strategy, feed rate, step over, EVA foam with variable hardness and typical design of insoles with wider tolerance) using the hybrid approach of the TM-RSM. This hybrid approach was selected for improving a mathematic model and optimizing the cutting parameters of the orthotic insoles in the CNC milling of EVA foam. In this study, the optimum conditions of cutting parameters in CNC milling, the best level of hardness in EVA foam, and the optimal typical design of insoles with wider tolerance were obtained through the second order regression model and plot for the 3D curve of response data versus all contributing factors.


## **METHODS AND MATERIALS**

### **3D Designing of Orthotic Insoles**

Three types of orthotics insole design that fits the contour of the diabetic foot were manufactured in the CNC milling. The RID method was used to develop the 3D models of insoles with the help of 3D scanning, of which the base curve surface modeling of three insole design could be explored using the software (PowerSHAPE 2016) according to [11]. The design results for a wide tolerance of the insole along X-Y axes (0.50-1.00 mm) are presented in Figure 1. Obviously, the usage of RID technique provided the insole model having a good accuracy in dimensions.

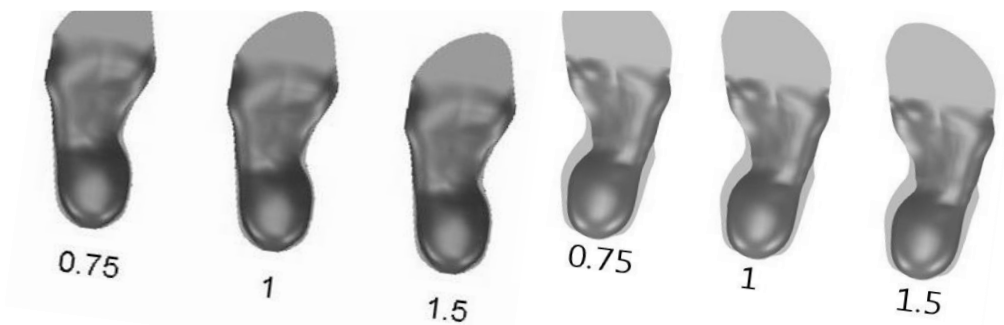

(a) Top view of 3D CAD model of insole with wide tolerance across axis XY from 0.5 to 1.00 mm

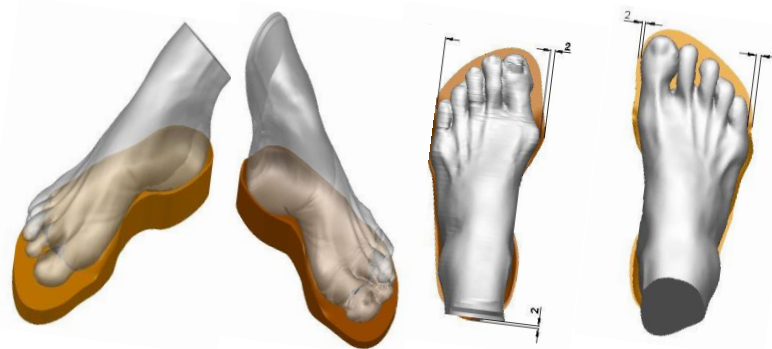

(b) Top view tolerance 0.75 mm of insole shoe orthotic

Figure 1. The 3D CAD model of insole shoe orthotics.

### Cutting Conditions and Experimental Design

There were machining parameters evaluated, including tool path strategy (A Factor), spindle speed (B Factor), feed rate (C Factor), step over (D Factor), EVA foam with variable hardness (Factor "E") and design of insoles with wider tolerance (Factor "F"). The cutting parameters level were designated following to the cutting tools and CNC milling specifications (Table 1). The experimental design consisted of six parameters and three levels selected according to the Taguchi's  $L_{27}3^6$  as orthogonal arrays (OA) and are given in Tables 2 and 3. The OA in the Taguchi method, matrix was chosen as an efficient average to perform the research with the minimum number of experiments. The Taguchi method also used the S/N ratio to analyze the effects of contributing factors on the responses. There are three S/N ratio's characteristics; the "lowest is the best", the "highest the best", and the "highest nominal is the best" in the process parameter optimization. In this research the arithmetic mean of surface roughness (Ra) and the average of the maximum value of the profile (Rz) in the optimal conditions were studied by the ratio as follows [22, 23] :

$$SN \text{ ratio} = -10 \log \frac{1}{n} (y_1^2 + y_2^2 + y_3^2 + \dots + y_n^2) \quad (1)$$

where variable  $y_1$ ,  $y_2$ ,  $y_3$ , and  $y_n$  are the responses of the machining process for a test condition that repeated  $n$  times. The S/N ratios were calculated using Equation (1) for 27 experimental trials and the results are provided in Table 4.



Table 1. The parameters of machining and level experiment.

Factor	Level		
	1	2	3
A	Raster	Raster 45 <sup>O</sup>	Step and Shallow
B	14000 rpm	14500 rpm	15000 rpm
C	800 mm/min	850 mm/min	900 mm/min
D	0.20 mm	0.25 mm	0.30 mm
E	20-35 HRc (\$31/sheet)	40-50 HRc (\$37/sheet)	50-60 HRc (\$47/sheet)
F	0.50 mm	0.75 mm	1.00 mm

Table 2. Design matrix of orthogonal array L<sub>27</sub>3<sup>6</sup> for the experimental runs.

No Experiment	Factor A	Factor B	Factor C	Factor D	Factor E	Factor F
1	1	1	1	1	1	1
2	1	1	1	1	2	2
3	1	1	1	1	3	3
4	1	2	2	2	1	1
5	1	2	2	2	2	2
6	1	2	2	2	3	3
7	1	3	3	3	1	1
8	1	3	3	3	2	2
9	1	3	3	3	3	3
10	2	1	2	3	1	2
11	2	1	2	3	2	3
12	2	1	2	3	3	1
13	2	2	3	1	1	2
14	2	2	3	1	2	3
15	2	2	3	1	3	1
16	2	3	1	2	1	2
17	2	3	1	2	2	3
18	2	3	1	2	3	1
19	3	1	3	2	1	3
20	3	1	3	2	2	1
21	3	1	3	2	3	2
22	3	2	1	3	1	3
23	3	2	1	3	2	1
24	3	2	1	3	3	2
25	3	3	2	1	1	3
26	3	3	2	1	2	1
27	3	3	2	1	3	2

Experimental outcomes of the 27 trials and the surface roughness mean for the orthotic shoe insole gauged by surface roughness tester (Mark Surf PS 1) are given in Table 3.

Table 3. Surface roughness Ra (the left and the right foot insoles).

No exp	Uncoded value of factor						Ra	Ra
	A	B	C	D	E	F	left foot	right foot
							insole $\mu\text{m}$	insole $\mu\text{m}$
1	1	1	1	1	1	1	7.671	8.594
2	1	1	1	1	2	2	8.995	9.436
3	1	1	1	1	3	3	9.252	8.081
4	1	2	2	2	1	1	6.969	7.716
5	1	2	2	2	2	2	8.011	8.800
6	1	2	2	2	3	3	8.368	6.618
7	1	3	3	3	1	1	7.812	8.027
8	1	3	3	3	2	2	8.324	9.286
9	1	3	3	3	3	3	8.527	8,319
10	2	1	2	3	1	2	7.162	7,881
11	2	1	2	3	2	3	8.198	9,225
12	2	1	2	3	3	1	8.080	7,496
13	2	2	3	1	1	2	7.967	8,395
14	2	2	3	1	2	3	9.330	8.771
15	2	2	3	1	3	1	7,659	8.897
<b>16</b>	<b>2</b>	<b>3</b>	<b>1</b>	<b>2</b>	<b>1</b>	<b>2</b>	<b>8.432</b>	<b>7.557</b>
17	2	3	1	2	2	3	7.934	7.361
18	2	3	1	2	3	1	8.417	6.890
19	3	1	3	2	1	3	7.963	8.151
20	3	1	3	2	2	1	8.588	9.061
21	3	1	3	2	3	2	8.822	7.970
22	3	2	1	3	1	3	8.165	7.983
23	3	2	1	3	2	1	7.974	7.881
24	3	2	1	3	3	2	7.554	8.047
25	3	3	2	1	1	3	8.009	6.850
26	3	3	2	1	2	1	7.599	8.489
27	3	3	2	1	3	2	8.372	9.008

Table 4. Response value for S/N ratios (dB) and means of effect.

Control factor	Surface roughness Ra (the left foot insole)					Surface roughness Ra (the right foot insole)				
	Level	Level	Level	SN Ra	Delta	Level	Level	Level	SN Ra	Delta
	1	2	3			1	2	3		
	Mean (μm)					(dB)	(μm)	Mean ( (μm)		
A	8,214	<b>8.095</b>	8.131	26618.0	0.119	8.320	<b>8.053</b>	8.181	5637.1	0.267
B	8.304	8.158	<b>8.011</b>	4664.21	0.293	8.433	<b>7.976</b>	8.123	1848.7	0.456
C	<b>7.863</b>	8.277	8.332	1517.19	0.469	8.009	<b>7.981</b>	8.542	1004.9	0.561
D	8.317	<b>7.989</b>	8.167	3692.73	0.328	8.502	<b>7.791</b>	8.238	776.7	0.711
E	<b>7.794</b>	8.328	8.350	1007.68	0.556	<b>7.906</b>	8.701	7.925	487.28	0.795
F	8.193	<b>7.863</b>	8.443	1182.39	0.580	8.117	<b>7.932</b>	8.486	1260	0.554

#### Workpiece Materials, Machine Tools and Cutting Tool Specifications

EVA foam with sizes of 250 x 95 x 23 mm in thickness were machined in the CNC milling experiments. The hardness of the material in the range of 20-60 HRC was measured using the Shore Hardness Tester (Asker CL-150). Three types of EVA foam were identified according to the three levels of hardness (level 1 of 20-35 HRC, level 2 of 35-45 HRC and level 3 of 50-60 HRC). Based on the price data of EVA foam in the local market of Jakarta, Indonesia, materials by the size of 1200 x 2400 x30 mm exists on the price range: \$31.00/sheet (Factor E, level 1), \$37.00 /sheet (Factor E, level 2), and \$47.00/sheet (Factor E, level 3). In addition, EVA foam density is 55–65 kg/m<sup>3</sup>, the nominal size of 2000 x1000 mm, a nominal split thickness 3–36 mm, tensile strength is 800 kPa and tear strength material is 4.5 kN/m [24].

The milling tests of EVA foam were performed by a milling machine [Rolland Modella MDX40R CNC] that is equipped with a maximum spindle rotation of 16000 rpm, and spindle speed motor DC of brushless motor with power of 100 W. The cutting tool used was a carbide tool with type of end milling [SECO, with specification 93060F] and ball-nose of cutter milling [JS533060D1B0Z3-NXT]. The surface roughness (Ra) was measured by the tester with tolerance 0.001 mm at three point locations. The cutoff length of 5 mm was selected, while the surface roughness measurements were performed at three times for each milled surface. The average roughness values (Ra) (the left and the right foot insoles) for each machining experiments are given in Table 3. The stages of this research are presented in Figure 2, while the resulting product of insoles is given in Figure 3.

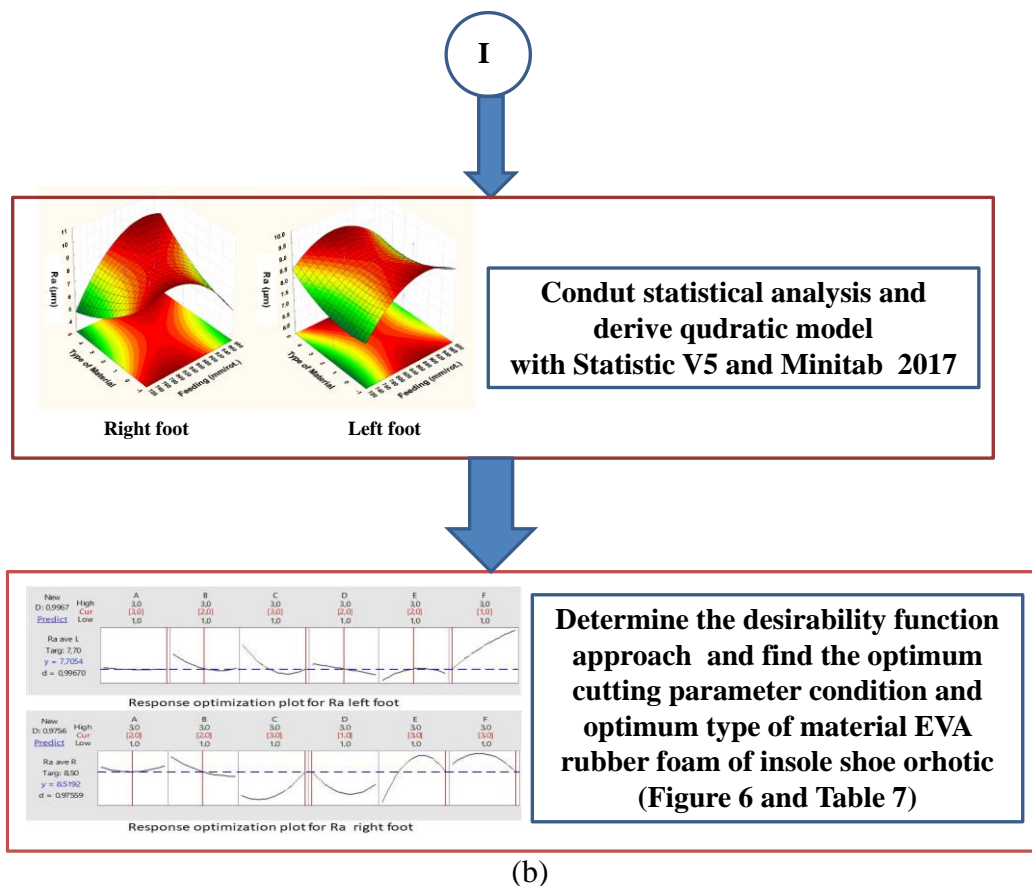
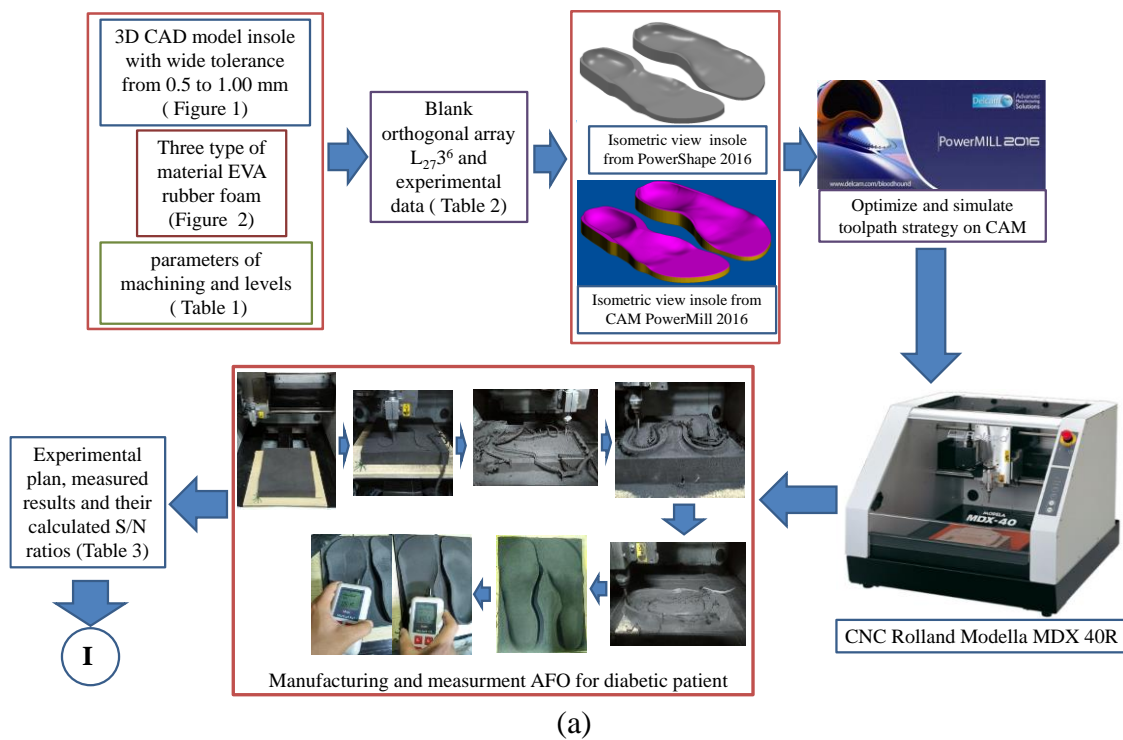


Figure 2. A schematic diagram of this research: (a) Experimental; (b) Modeling.



Figure 3. Research output: (a) Product insoles of EVA foam with different hardness, (b) confirmation insole product with 3D prototype foot of patient with diabetic.

### Mathematical Modeling of RSM Method

RSM was the combination of statistics and mathematical procedures that utilize the system modeling and problem analysis to create a response of interest. This response is effected by several variable and the target value [25]. The first stage in RSM is finding the appropriate estimation of the true function between the y value and the set of independent variable ( $x_i$ ). When a linear function is obtained, then the approximating function is the first-order model (Equation 2):

$$y = \beta_0 + \beta_1 x_1 + \beta_2 x_2 + \dots + \beta_k x_k + \varepsilon \quad (2)$$

where,  $\beta_0$  = constant,  $\beta_k$  = regression coefficient,  $x_1$  = input parameters and  $\varepsilon$  = error.

However, the polynomial function of the second-order model is commonly recommended because the first order of the model has the highest lack-of fit. Here, the second order RSM model can be expressed as:

$$y = \beta_0 + \sum_{i=1}^k \beta_i x_i + \sum_{i=1}^k \beta_{ii} x_i^2 + \sum_{i < j}^{\infty} \beta_{ij} x_i x_j + \varepsilon \quad (3)$$

Moreover, the value of each coefficient and constant was computed by the least-square method. Finally, the desirability function (dF) can be used to optimize of multiple-response TM-RSM [26].

## RESULT AND DISCUSSION

### Analysis of S/N Ratio

In this work, the Ra values was got from the experimental runs performed on the selection of cutting parameters are shown in Table 3. The each factor level effects on the quality features were examined using the S/N ratio. The difference value S/N ratio between maximum and minimum (main effect) are also presented in Table 4. A low value of surface roughness (Ra) could be achieved by the optimum machining conditions, of which the cutting parameters and their levels for this experiment of the left foot insoles were obtained with the second level of toolpath strategy (A), depth of cut (D) and typical design of insoles (F), the first level of feed rate (C) and hardness of EVA foam (E), and third level of spindle speed (B). For surface roughness (Ra) of the right foot insoles, the levels that ensure the machining would be in the target value are level 2 of the tool path strategy (A), spindle speed (B), feed rate (C), depth of cut (D) and typical design of the insole (F), and level 1 of the hardness of EVA foam (E). Therefore, two conditions of the optimum cutting parameters for the minimum surface roughness Ra (the left and right foot insoles) were simplified according to the combined factors of  $A_2B_3C_1D_2E_1F_2$  and  $A_2B_2C_2D_2E_1F_2$  (Figure 4).

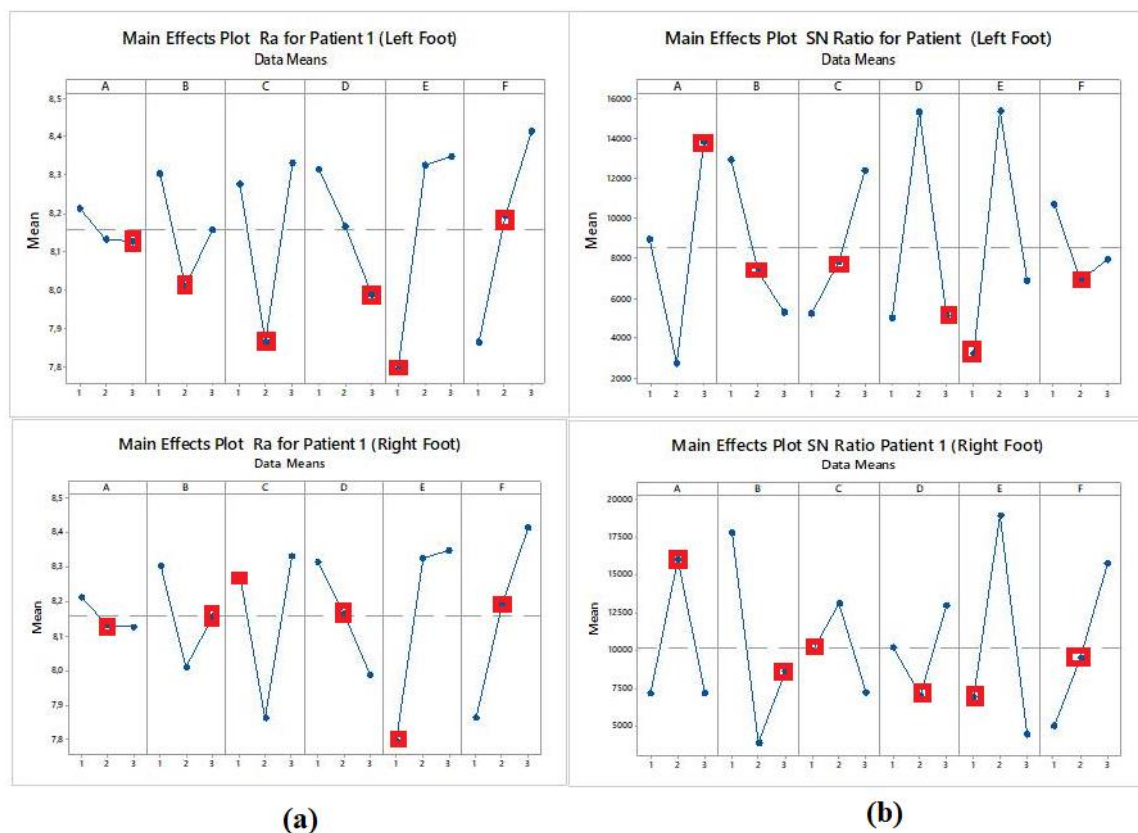


Figure 4. Main effects plots; (a) eEffects of control factors for Ra (b) the average of S/N ratio for Ra.



### Taguchi-Based Selection of the Optimum Cutting Condition

The interaction analysis in the S/N ratios shows that  $A_2B_3C_1D_2E_1F_2$  and  $A_2B_2C_2D_2E_1F_2$  are the optimal combinations for yielding Ra of the left and the right foot insoles respectively. In this case of the left foot insole machining, two factors in the S/N data analysis were found to be significant, that are feed rate and hardness materials. The lowest level of feed rate and hardness material are the most desired conditions for the achievement of minimum Ra for the left foot insoles. Moreover, milling of the low hardness of EVA foam favours producing the minimum Ra for the right foot insoles. Therefore, the predicted optimal surface roughness ( $Ra_{pred}$ ) can be expressed as follows:

$$Ra_{pred} = T_{Ra\_exp} + (\bar{A}_2 - T_{Ra\_exp}) + (\bar{B}_3 - T_{Ra\_exp}) + (\bar{C}_1 - T_{Ra\_exp}) + (\bar{D}_2 - T_{Ra\_exp}) + (\bar{E}_1 - T_{Ra\_exp}) + (\bar{F}_2 - T_{Ra\_exp}) \quad (4)$$

Where,  $\bar{T}_{Ra\_exp} = 8.1576$ ,  $\bar{A}_2 = 8.095$ ,  $\bar{B}_3 = 8.011$ ,  $C_1 = 7.863$ ,  $\bar{D}_2 = 7.989$ ,  $\bar{E}_1 = 7.794$ ,  $\bar{F}_2 = 7.863$  hence  $Ra_{pred}$  for the left foot insole =  $8.1576 + (8.095 - 8.1576) + (8.011 - 8.1576) + (7.863 - 8.1576) + (7.989 - 8.1576) + (7.794 - 8.1576) + (7.863 - 8.1576) = 6.936 \mu m$ .

$$Ra_{pred} = T_{Ra\_exp} + (\bar{A}_2 - T_{Ra\_exp}) + (\bar{B}_2 - T_{Ra\_exp}) + (\bar{C}_2 - T_{Ra\_exp}) + (\bar{D}_2 - T_{Ra\_exp}) + (\bar{E}_1 - T_{Ra\_exp}) + (\bar{F}_2 - T_{Ra\_exp}) \quad (5)$$

Where,  $T_{Ra\_Exp} = 8.1774$ ,  $\bar{A}_2 = 8.053$ ,  $\bar{B}_2 = 7.976$ ,  $C_2 = 7.981$ ,  $\bar{D}_2 = 7.791$ ,  $\bar{E}_1 = 7.906$ ,  $\bar{F}_2 = 7.932$  hence,  $Ra_{pred}$  for the right foot insole =  $8.1774 + (8.053 - 8.1774) + (7.976 - 8.1774) + (7.981 - 8.1774) + (7.791 - 8.1774) + (7.906 - 8.1774) + (7.932 - 8.1774) = 6.752 \mu m$ .

A confidence interval value (CI) was used to verify the features of quality the result of the research. The confidence interval was the step to predict the optimal values that can be counted using the following equations [22, 27]:

$$CI = \sqrt{F_{\alpha, dof_{error}} V_{error} x \left( \frac{1}{n_{eff}} \right)} \quad (6)$$

$$n_{eff} = \frac{\text{Number of experiment}}{1 + \text{total dof in items in used in estimate}} \quad (7)$$

The confidence interval of the surface roughness  $Ra_{pred}$  for the left foot insole as follows:  $F_{0.05;1,26} = 4.23$  (tabulated),  $V_{error} = 0.2259$  (Table 5), and  $N_{eff} = 2.25$ . The  $CI_{Ra} = \pm 0.652 \mu m$ . The predictive mean of Ra is  $Ra_{pred} = 6.936 \mu m$ ,  $|Ra_{pred} - CI| < Ra_{pred} < |Ra_{pred} + CI|$  ie.  $6.936 - 0.652 \mu m < 6.936 \mu m < 6.939 + 0.652 \mu m$ ,  $6.311 \mu m < Ra_{pred} < 7.615 \mu m$ .

The confidence interval of the surface roughness  $Ra_{pred}$  for the right foot insole as follows:  $F_{0.05;1,26} = 4.23$  (tabulated),  $V_{error} = 0.208$  (From Table 5. a), and  $N_{eff} = 2.25$ . Thus,  $CI_{Ra} = 0.625 \mu m$ . The predictive mean of  $Ra_{pred} = 6.752 \mu m$   $|Ra_{pred} - CI| < Ra_{pred} < |Ra_{pred} + CI|$  ., ie.  $6.752 - 0.625 \mu m < 6.752 \mu m < 6.752 + 0.625 \mu m$ ,  $6.127 \mu m < Ra_{pred} < 7.377 \mu m$ .

Table 5 presents the results of the confirmation experiments according to the optimum levels of the combined factors. Moreover, the confidence interval (CI) was calculated for minimum Ra (the left foot and the right foot insoles) to be 0.652  $\mu\text{m}$  and 0.625  $\mu\text{m}$  respectively. Obviously, the result confirmation test, conducted for the responses were obtained in the CI value with a 95%. In the case of milling the left foot insole, the system optimization Ra was reached that using the smallest value of feed rate and the relevant factor of lowest hardness materials. This result is according to previous work by [28]. However, the smallest target value of surface roughness in the right foot insole was obtained by machining EVA foam with the smallest hardness.

Table 5. Comparisons of results of the experimental and predicted values by Taguchi method.

Response	Confirmatory experiment result	Calculated value	Confidence Interval (CI)	Difference $Ra_{\text{exp}} - Ra_{\text{cal}}$	Optimization
$Ra_{\text{left}}$ foot ( $\mu\text{m}$ )	$Ra_{\text{exp}} = 7,554$	$Ra_{\text{cal}} = 6.936$	$CI_{Ra} = 0.652$	0.518	0.518 < 0.652 Sucessful
$Ra_{\text{right}}$ foot ( $\mu\text{m}$ )	$Ra_{\text{exp}} = 7,332$	$Ra_{\text{cal}} = 6.752$	$CI_{Ra} = 0.625$	0.580	0.580 < 0.625 Sucessful

### ANOVA in RSM Method

Analysis of variance (ANOVA) was used to test the significance of the regression model, and individual model coefficients of factors (toolpath strategy, spindle speed, feed rate, step over, the type of EVA foam, and width of tolerance design) contributed to the surface roughness of the insoles. The ANOVA results for the surface roughness of the insoles are summarized in Table 6 (a) and (b). The P-value and its % contribution were occupied into concern to the significance level of all variables. In the present study, the second regression model provided the P-value less than 0.05 indicating that both models have a significant effect on the response. Moreover, the values of the contribution (%) for the response of surface roughness (the left and right foot insoles) are 78.62 % to 89.00 % respectively (with error 21.376 % and 11.00 %). Some of the model terms were found to be significant. For surface roughness of the left foot insole, E–F, C\*C, CE, and DF are significant model terms, while the significant model terms of surface roughness of the right foot insole are C, A\*A, and E\*E.

Further, the percentages of contribution to the model linear, square and interactions between factors on the surface roughness of the left foot insole are 37.05% (linear), 15.24% (square) as well as 15.13% (interactions between factors). Factor E and F contribute more significant (17.20% and 17.04%), followed by factor C (1.73%), B (1.21%), D (0.95%), and A (0.42%) [Table 6(a)]. Similarly, for the surface roughness of the right foot insole, factor C was the most effective factor with the contribution of 6.54%, followed by F (2.29%), D (1.27%), E (0.59%), B (0.30%) and A (0.22%) [Table 6(b)]. Correspondingly, the low value of surface roughness of shoe orthotic insole could be achieved by optimum milling conditions (feed rate and type of material EVA foam), which was in close agreement with the published works [23, 29, 30].

Table 6(a). ANOVA-surface roughness Ra of the left foot insole

Source variation	DoF	SS	MS	F-value	P-value	Contribution (%)
Model	13	6.353	0.4887	3.68	0.013	78.62
Linear	6	2.994	0.4990	3.76	0.022	37.05
A	1	0.034	0.0339	0.26	0.406	0.42
B	1	0.098	0.0979	0.74	0.538	1.21
C	1	0.140	0.1402	1.05	0.323	1.73
D	1	0.077	0.0771	0.58	0.460	0.95
<b>E</b>	<b>1</b>	<b>1.390</b>	<b>1.3901</b>	<b>10.5</b>	<b>0.007</b>	<b>17.20</b>
<b>F</b>	<b>1</b>	<b>1.377</b>	<b>1.3768</b>	<b>10.4</b>	<b>0.007</b>	<b>17.04</b>
Square	2	1.232	0.6159	4.63	0.03	15.24
C*C	1	0.839	0.839	6.31	0.026	10.38
E*E	1	0.393	0.3930	2.96	0.109	4.86
2-Way Interaction	7	1.223	0.2791	2.1	0.130	15.13
A*B	1	0.127	0.127	0.96	0.346	1.57
A*C	1	0.290	0.0033	2.19	0.163	3.59
B*F	1	0.264	0.2638	1.99	0.182	3.26
C*E	1	0.509	0.5086	3.83	0.072	6.29
D*F	1	1.068	1.068	8.04	0.014	13.21
Error	13	1.727	0.1329			21.376
Total	26	8.081				100

Table 6(b). ANOVA-surface roughness Ra of the right foot insole

Variation of Source	DoF	SS	MS	F-value	P-value	Contribution (%)
Model	16	8.8423	0.5526	5.06	0.049	89.00
Linear	6	1.1329	0.1882	1.73	0.212	11.40
A	1	0.0214	0.0214	0.2	0.668	0.22
B	1	0.0299	0.0299	0.27	0.612	0.30
<b>C</b>	<b>1</b>	<b>0.6500</b>	<b>0.6501</b>	<b>5.95</b>	<b>0.035</b>	6.54
D	1	0.1258	0.1258	1.15	0.309	1.27
E	1	0.0588	0.0588	0.54	0.480	0.59
F	1	0.2274	0.2274	2.08	0.180	2.29
Square	3	4.7855	1.5952	14.6	0.001	48.17
A*A	1	1.4859	1.4859	13.6	0.004	14.96
D*D	1	0.1969	0.1969	1.8	0.209	1.98
E*E	1	2.5920	2.5920	23.73	0.001	26.09
2-Way Interaction	7	3.09987	0.44284	4.05	0.023	31.20
A*F	1	1.15284	1.15284	10.55	0.009	11.60
B*E	1	0.2085	0.2085	1.91	0.197	2.10
B*F	1	0.2170	0.2170	1.99	0.189	2.18
C*D	1	0.3737	0.3737	3.42	0.094	3.76
D*F	1	0.2452	0.2452	2.24	0.165	2.47
E*F	1	0.29503	0.29503	2.7	0.131	2.97
Error	10	1.092	0.1093			11.00
Total	26	9.935				100.00

### RSM based modeling for surface roughness

The RSM was complemented for modeling and analyzing variables, which have affiliation between a dependent variable and independent variables. In this way, the trial results in CNC milling of EVA foam were applied to improve the mathematical models of Ra. Furthermore, the second-order model of surface roughness of Ra can be generated as a function of the machining parameters (toolpath strategy, spindle speed, feed rate and step over). Thus, the relationship between the surface roughness Ra and the milling parameters on this research can be expressed as follows [Equation (8)]:

$$\begin{aligned}
 R_a = & \beta_0 + \beta_1.A + \beta_2.B + \beta_3.C + \beta_4.D + \beta_5.E + \beta_6.F + \beta_7.A.B + \beta_8.A.C + \beta_9.A.D + \beta_{10}.A.E \\
 & + \beta_{11}.A.F + \beta_{12}.B.C + \beta_{13}.B.D + \beta_{14}.B.E + \beta_{15}.B.F + \beta_{16}.C.D + \beta_{17}.C.E + \beta_{18}.C.F + \beta_{19}.D.E \\
 & + \beta_{20}.D.F + \beta_{21}.E.F + \beta_{22}.A^2 + \beta_{23}.B^2 + \beta_{24}.C^2 + \beta_{25}.D^2 + \beta_{26}.E^2 + \beta_{27}.F^2
 \end{aligned} \quad (8)$$

Accordingly, the mathematical model of the surface roughness (Ra) can be generated using the results of optimized milling parameters (A, B, C, D, E, F). Surface roughness (Ra) models can be expressed using the RSM as the following [Equations. (9) and (10)]:

$$\begin{aligned} Ra_{right\_foot} = & 77.9826 + 0.39A - 0.01875B + 0.133C + 134.941.D - 8.0156.E - 0.21735.F + \\ & 0.000011847.AB + 0.000679AC - 2.62278AD + 0.07579.AE - 0.3245.AF + \\ & 0.00000562BC - 0.00388BD + 0.0002168.BE + 0.0003677.BF - 0.10377.CD + \\ & 0.005315.CE - 0.005077.CF + 0.150138.DE + 13.582.DF - 0.1993.EF - \\ & 0.10051.A^2 + 0.000000489.B^2 - 0.0001147.C^2 + 13.3907.D^2 + 0.06875.E^2 - 1.4355.F^2 \end{aligned} \quad (9)$$

$$\begin{aligned} Ra_{left\_foot} = & -104.433 - 0.155A + 0.00577B + 0.1403C + 168.1225D + 0.7259E + 1.104F \\ & + 0.00007094AB - 0.000932AC + 1.6817AD + 0.2AE + 0.0754AF - 0.000001164BC \\ & - 0.004453BD - 0.0000678BE - 0.0002514BF - 0.07847CD - 0.000984CE - \\ & 0.012335CF - 1.2445DE - 8.6592DF + 0.27EF - 0.2548A^2 - 0.000000072B^2 \\ & - 0.00006307C^2 - 69.6138D^2 + 0.0504E^2 - 3.76036F^2 \end{aligned} \quad (10)$$

The models of Equations (9) and (10) were subsequently checked using a numerical method for determination of  $R^2$ . The response for surface roughness of the right and the left foot insoles developed in this study provides  $R^2$  values of 97.80 % and 98.20 %, respectively. In this case, the  $R^2$  values are close to 100 %, which is desirable for this experiment. Therefore, the above models can be used to predict the surface roughness at the particular design parameters.

For better understanding, the interaction effect of machining variables on surface roughness, 3D-plots for the measured responses was developed using the equation (Equations. 9 and 10). The 3D surface graphs for the relationship between cutting parameters and the response of surface roughness are shown in Figure 5 (a), (b), (c), (d), and (e). In this case of the right foot insole, the minimum level of surface roughness could be achieved by milling of EVA foam with the lowest hardness, the middle position of spindle speed and high level of toolpath strategy and step over. However, the minimum surface roughness of the left foot insole resulted in feed rate and spindle speed, toolpath strategy and step over at low levels, while EVA foam at any level of hardness. The explanation of the result that the feed rate increasing for machining process with yields vibration and more generate heat and hence contributing to the higher value of surface roughness according by [31]. It seems that the lowest step over resulted in a reduction in the value of surface roughness. Moreover, a complicated relationship between wide tolerance, the hardness of material and surface roughness of both insoles is shown in Figure 5(e.) The lowest wide tolerance of insoles resulted in the minimum surface roughness.

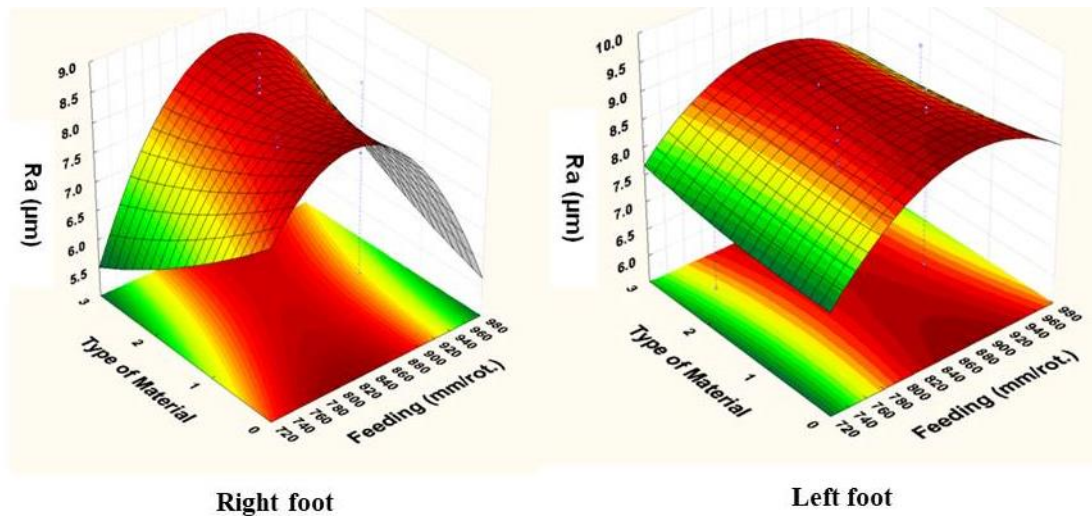


Figure 5. (a) Plot 3D curve of  $R_a$  vs Type of Material Eva Rubber foam – Feeding (mm/min).

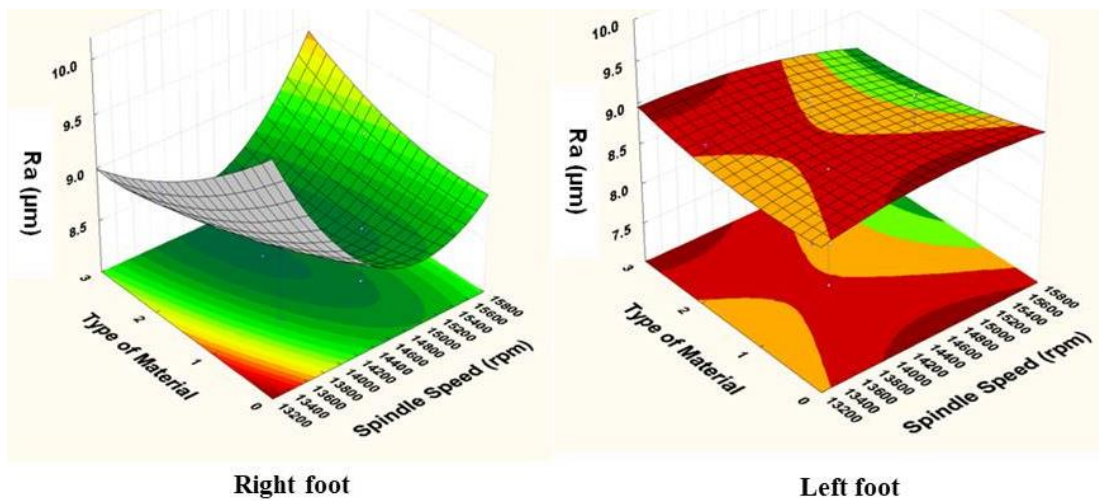


Figure 5. (b) Plot 3D curve of  $R_a$  vs Type of Material Eva Rubber foam – Spindle Speed (rpm)



*CNC milling of EVA foam with varying hardness for custom orthotic shoe insoles and process parameter optimization*

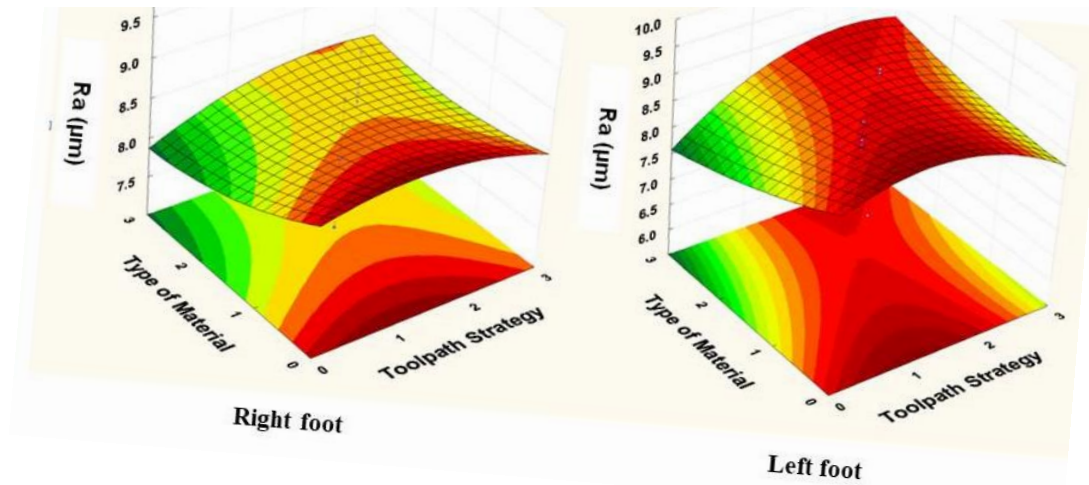


Figure 5. (c) Plot 3D curve of  $R_a$  vs Type of Material Eva Rubber foam – Toolpath Strategy

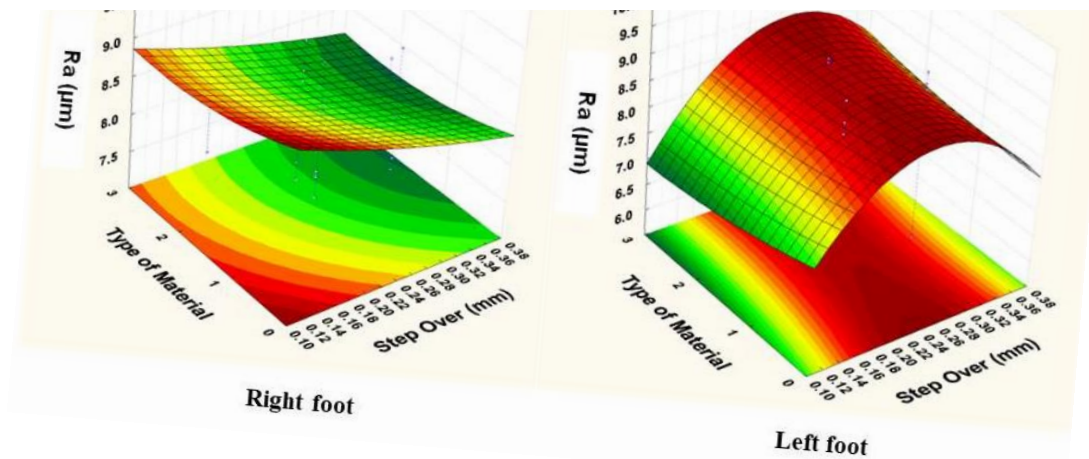


Figure 5. (d) Plot 3D curve of  $R_a$  vs Type of Material Eva Rubber foam – Step over (mm).

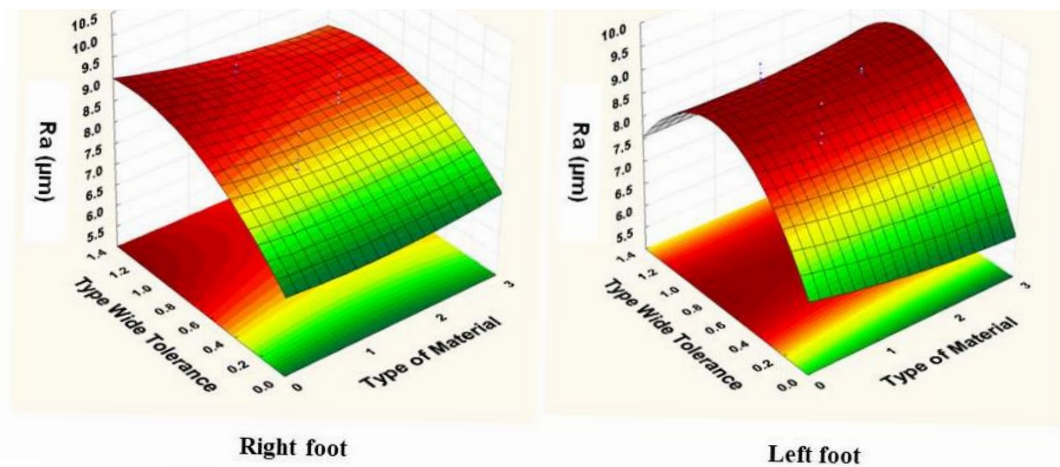


Figure 5. (e) Plot 3D curve of Ra vs Type Wide Tolerance – Type of Material.

The prediction capability of the developed model was performed by a separate setup for experimentation, providing that value of Ra for the right and the left foot insoles is 8.538  $\mu\text{m}$  and 7.828  $\mu\text{m}$ , respectively. The predicted values matching to the control parameters are toolpath strategy of raster 450, spindle speed of 14,500 rpm, the feeding rate of 850 mm/min, step over about 0.25 mm, the best EVA foam with hardness 20-35 HRC (Level 1) with the typical design of insoles with wider tolerances of 0.75 mm. In this condition, the predicted values lead to similar trend as experimental values in CNC milling machine with absolute average percentage errors for both insoles is less than 3.6 % (Table 7). The results indicate that the proposed model performs satisfactorily [23, 26, 30].

Correspondingly, EVA foam with hardness ranged 20-35 HRC is the most appropriate for an insole shoe orthotics. This material is often used as a semi-rigid insoles [32]. In the present study, CNC milling of EVA foam with varying hardness performed satisfactorily to provide surface roughness at the range of 7-9  $\mu\text{m}$ . The chip formed during machining was the granules or soft pieces-liked shapes, which can be wasted completing on the flute ball nose cutter milling. In terms of economic value, the use of EVA foam with the size of 1200 x 2400 x 30 mm (price \$31/sheet) for insole provides the lowest cost product. Hence the EVA foam with low hardness and low cost may be the best level and the best typical design of insoles with wider tolerance.

Table 7. The optimum parameters and the confirmation results of the experimental and predicted values by the Response Surface method.

Cutting Parameter Conditions Optimal	Toolpath	Spindle Speed	Feed Rate	Step over	Type of Material Eva rubber Foam	Width Tolerance	Roughness Surface (Ra_Based on )		Percentage Error (%)
		(RPM)	(mm/min)	mm	(HRc)	(mm)	Exp.	RSM	
		μm							
<b>A<sub>2</sub>B<sub>2</sub>C<sub>2</sub>D<sub>2</sub>E<sub>1</sub>F<sub>2</sub></b>	RASTER 45	14,500	850	0.25	20-35 HRc	0.75	<b>8.432</b>	8.538	1.26
<b>A<sub>2</sub>B<sub>2</sub>C<sub>2</sub>D<sub>2</sub>E<sub>1</sub>F<sub>2</sub></b>	RASTER 45	14,500	850	0.25	20-35 HRc	0.75	<b>7.557</b>	7.828	<b>3.59</b>

Tabel 8. Comparison of the optimum and predicted results.

Optimization technique	Ra				Absolut % error	
	Optimal		Predicted			
	Left Foot (μm)	Right Foot (μm)	Left Foot (μm)	Right Foot (μm)	Left Foot	Right Foot
	Taguchi approach (TM)	7.554	7.332	6.936	6.752	8.18
TM-RSM approach	7.572	7.648	8.538	7.828	11.31	2.30
Percentage (%) improvement	0.24	4.13	-	-		

### Optimization Using Desirability Function Analysis with TM-RSM

In this method, the parameters analyzed of predicted response can be converted into a desirability value (dF) [33]. The ranges scale of dF is between 0 and 1. If the value of dF = 0 or closes in 0, then the response is considered completely unacceptable. If dF equals to 1 or closes in 1, then the response value is perfect for the target value. In this study, the desirability function was selected as "the smaller the better" because the minimum surface roughness was achieved at the optimum process parameters. The composite desirability (D) and the optimum response corresponding to each control parameter obtained has been analyzed by MINITAB and shown in the Figure 6.

The predicted optimum value of Ra (the left foot insole) is 7.572  $\mu\text{m}$  at factor A (level 3), factor B (level 3), factor C (level 1), factor D (level 3), factor E (level 1) and factor F (level 2). In contrast, the predicted optimum value of Ra (the right foot insole) is 7.648  $\mu\text{m}$  at factor A (level 2), factor B (level 2), factor C (level 2), factor D (level 3), factor E (level 3) and factor F (level 1). Moreover, the desirability values for the left and right foot insoles are 0.98766 and 0.94375 respectively, and hence the desirability value of Ra is close to 1.0. Consequently, the response is considered perfect for the target value.

A confirmation research has been directed to predict the optimum condition and result (experiment) Ra = 8.432  $\mu\text{m}$  and 7.557  $\mu\text{m}$  (for the left and right foot insoles) (Table 7). The prediction ability of the established model has been verified in the optimal condition. The Ra

predicted = 8.538  $\mu\text{m}$  and 7.828  $\mu\text{m}$  has been got by established the model. The optimal outcomes gained by different optimization methods (TM and TM-RSM) are associated and got the significant enhancement in surface product with the hybrid method. The expected and relative analysis at optimal result has been summarized in Table 8. It has been observed (Table 8) that hybrid optimization technique of TM-RSM provides 0.24% and 4.13% same surface quality as associated to the optimal outcome that gained from Taguchi method. It has also been result that prediction ability of developed model is significant at 11.31% and 2.30% error for both insoles at the optimal condition gained by the hybrid method.

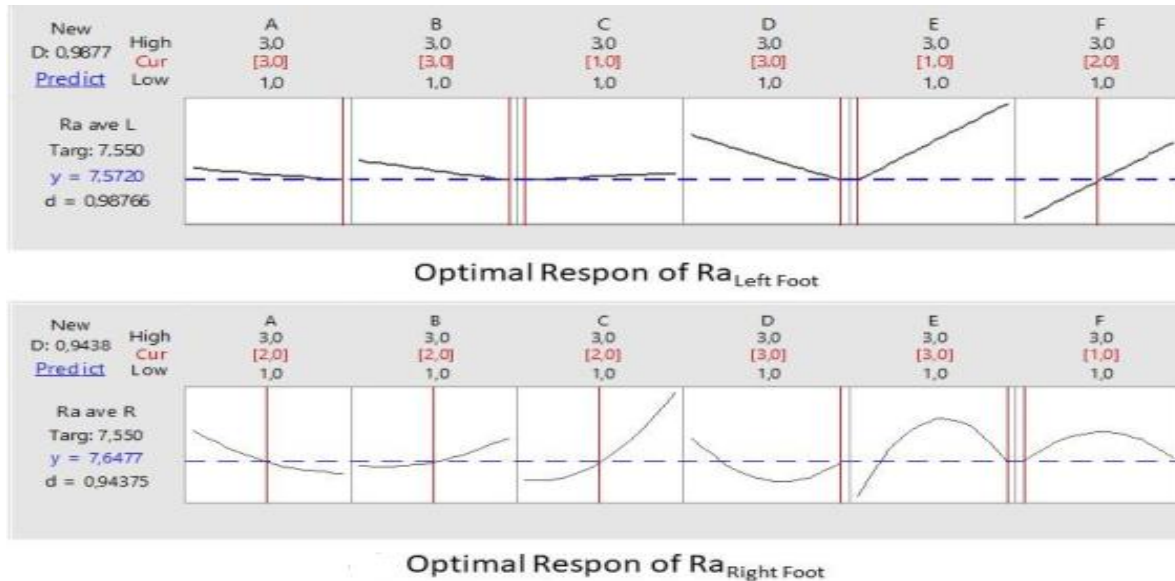


Figure 6. Optimized result of TM-RSM approach  
 ( D=composite desirability; d= individual desirability; High = highest value parameter;  
 Cur = optimal current value of control parameter; Low = lowest value parameter,  
 y = response parameter, Ra = average surface roughness; A = toolpath strategy;  
 B= spindle speed; C= feed rate; D = step over; E = EVA foams with variable hardness;  
 F = typical design of insoles with wider tolerance).

In the present research, the hybrid methods of TM-RSM has been successfully applied for modeling and optimization in CNC milling of EVA foam for orthotic shoe insoles. It should be noted that based on the best author's knowledge, this work is the first study on exploring and combining the experimental and modelling approaches for manufacturing a rubber based product in CNC milling. Most of the previously published works [23, 26, 30, 31, 34] pointed out the investigation of process parameter in turning process. In addition, with respect to the CNC milling researches, the workers [28, 29, 33, 35] only focused on the determination of optimal parameters applied on flat surface.

## **CONCLUSION**

In the present research, the hybrid method of TM-RSM has been applied for modeling and optimization in CNC milling of EVA foam for orthotic shoe insoles. Following conclusions have been got from modelling and optimization:

1. The 3D surface roughness plots illustrates the interactive effect of hardness of EVA foam and the feeding rate, step over, spindle speed and tool path on the yields of surface roughness. The Ra value decreases with an increase in the hardness value of EVA foam, step over and spindle speed, while the best Ra value was observed at a low level of hardness of EVA foam.
2. The optimum cutting conditions obtained by the TM approach show the value of the optimum Ra = 6.936  $\mu\text{m}$  (the left foot insole) and 6.752  $\mu\text{m}$  (the right foot insole). The optimal combination of the  $A_2B_3C_1D_2E_1F_2$  and  $A_2B_2C_2D_2E_1F_2$  is as a tool path strategy = raster 450, spindle speed = 14500 – 15000 rpm, feed rate = 800-850 mm/min, step over = 0.25 mm, hardness of EVA foam = 20-35 HRC, and the type of wide tolerance = 0.75 mm.
3. The optimum cutting condition based on RSM approach provides the value of the optimum Ra = 7.828  $\mu\text{m}$  (the left foot insole) and Ra = 8.538  $\mu\text{m}$  (the right foot insole). Both are in the optimal condition of  $A_2B_2C_2D_2E_1F_2$  with optimum control parameters as a tool path strategy = raster 450, spindle speed = 14500 rpm, feed rate = 850 mm/min, step over = 0.25 mm, hardness of EVA foam = 20-35 HRC, and the type of wide tolerance = 0.75 mm.
4. The optimal combination gained by TM-RSM based hybrid method are the raster toolpath strategy of 450 and step & shallow machining, spindle speed of between 14500 – 15000 rpm, feed rate of 800 mm/min and 900mm/min, step over about 0.3 mm, hardness of EVA foam of 20-35 HRC, and 50-60 HRC and the type of wide tolerance of 0.50-0.75 mm. The optimum value of prediction provides the optimum Ra = 7.572  $\mu\text{m}$  and 7.648  $\mu\text{m}$  for the left foot and right foot insoles, respectively.
5. The surface texture gained by the hybrid method is better (0.244% for the left foot and 4.13% for the right foot insoles) as compared to the optimum value of the Taguchi method.
6. Eva rubber foam with the hardness of 20-35 HRC is suggested to be most optimal material insoles which can be manufactured in the CNC milling.
7. Both methods (TM approach and TM-RSM approach) may be beneficial for optimization of input data in milling operations of orthotic shoe insoles leading to reduce the manufacturing time and cost.

## ACKNOWLEDGEMENTS

In this paper, we would like to gratefully thank you for, Ririn Diar Astanti, D.Eng, Head of Department Industrial Engineering Program, Faculty of Industrial Technology, University of Atma Jaya Yogyakarta, PUTP Polytechnic ATMI Surakarta and Tribology Laboratory of the Department of Mechanical Engineering, University of Diponegoro in Semarang that already provide full support in the form of infrastructure support CAM, CAD, and RE during the design, developed process as well as the writing of this paper.

## REFERENCES

- [1] Shimazaki Y, Inoue T, Nozu S. Shock-absorption properties of functionally graded EVA laminates for footwear design. *Polymer Testing*. 2016;54:98-103.
- [2] Hawke F, du Toit V, Burns J, Radford JA. Custom-made foot orthoses for the treatment of foot pain (Review). Published by John Wiley & Sons, Ltd. 2008.
- [3] Boulton AJ, Krisner RS, Vileikyte L. Clinical practice. Neuropathic diabetic foot ulcers. *The new england journal of medicine*. 2004;351:48-55.
- [4] Ghassemi A, Karimi MT, Mossayebi AR, Jamshidi N, Naemi R. Manufacturing and finite element assessment of a novel pressure reducing insole for Diabetic Neuropathic patients. *Australasian Physical & Engineering Sciences in Medicine*. 2014;38(1):63–70.
- [5] Matricali GA, Mathieu C, Dereymaeker G, Muls E, Flour M. Economic aspects of diabetic foot care in a multidisciplinary setting: a review. *Diabetes/Metabolism Research & Reviews*. 2007 Jul;23(5):339-47.
- [6] Landorf K, Keenan AM, Rushworth RL. Foot orthosis prescription habits of australian and new Zealand podiatric physicians, *Journal of American Podiatric Medical Association*. 2001;91(4):174-183.
- [7] Dombroski CE, Balsdon MER, Froats A. The use of a low cost 3D scanning and printing tool in the manufacture of custom-made foot orthoses: A preliminary study. *BMC Research Notes*. 2014;7:443-447.
- [8] Qiu TX, Teo EC, Yan YB, Lei W. Finite element modeling of a 3D coupled foot-boot model. *Medical Engineering Physics*. 2011;33:1228-1237.
- [9] Berry C, Wang H, Jack Hu S. Product architecting for personalization. *Journal of Manufacturing Systems*. 2013;32(3):404-411.
- [10] Vicenzino B. Foot orthotics in the treatment of lower limb conditions: a musculoskeletal physiotherapy perspective. *Manual Therapy*. 2004;9:185-192.
- [11] Ye X, Liu H, Chen L, Chen Z, Pan X, Zhang S. Reverse innovative design- an integrated product design methodology. *Computer-Aided Design*. 2008;40: 812-820.
- [12] Jeng YR, Yau HT, Liu DS. Designing experimental methods to predict the expansion ratio of EVA foam material and using finite element simulation to estimate the shoe expansion shape. *Material Transaction*. 2012;53:1685-1688.
- [13] Xia, Z. Application of Reverse Engineering based on Computer in Product Design, *International Journal of Multimedia and Ubiquitous Engineering*. 2014;9:343-353.
- [14] Munro W. Orthotic prescription process for the diabetic foot. *The Diabetic Foot*. 2005;8:72-82.



- [15] Li Y, Falk B, Linke BS, Voet H, Schmitt R, Lam M. Cost, sustainability and surface roughness quality – A comprehensive analysis of products made with personal 3D printers. *CIRP Journal of Manufacturing Science and Technology*. 2017;16:1-21.
- [16] Salles AS, Gyi DE. The specification of personalised insoles using additive manufacturing. *Work*. 2012;41(1):1771–1774.
- [17] Creylman V, Pallari J, Peeraer L, Muraru L, Vertommen H. Gait assessment during the initial fitting of customized selective laser sintering ankle foot orthoses in subjects with drop foot. *Prosthetics and orthotics international*. 2013 April;37(2):132-138.
- [18] Faustini MC, Stanhope SJ, Crawford RH, Neptune RR. Manufacture of passive dynamic ankle-foot orthoses using selective laser sintering. *IEEE Transactions on Biomedical Engineering*. 2008; 55(2 Pt 1):784-790.
- [19] Schrank ES, Stanhope SJ, Hitch L, Wallace K, Moore R. Assessment of a virtual functional prototyping process for the rapid manufacture of passive-dynamic ankle-foot orthoses. *Journal Biomechanic Engineering*. 2013;135:101011-101017.
- [20] Pallari JH, Dalgarn KW, Woodburn J. Mass customization of foot orthoses for rheumatoid arthritis using selective laser sintering. *IEEE Transaction Biomedical Engineering*. 2010;57:1750 -1756.
- [21] Salles AS, Gyi DE. An evaluation of personalised insoles developed using additive manufacturing. *Journal Sports Science*. 2013;31:442–450.
- [22] Roy RK. *A Primer on the Taguchi Method*. Van Nostrand Reinhold. New York. USA. (1990).
- [23] Sarıkaya M, Güllü A. Taguchi design and response surface methodology based analysis of machining parameters in CNC turning under MQL. *Journal Cleaner Production*. 2014;65:604-616.
- [24] Nurit ET, Ety W, Yifat HF, Amit G. Role of EVA viscoelastic properties in the protective performance of a sport shoe: Computational studies. *Journal Bio-Medical & Material Engineering*. 2006;16:289-299.
- [25] Myers RH, Montgomery DC, Anderson-Cook CM. *Process and Product Optimization Using Designed Experiments*. third ed. John Wiley & Sons. New York. USA. 2009.
- [26] Yadav RN. A hybrid approach of Taguchi-RSM for modeling and optimization of duplex turning process. *Measurement*. 2017;100:131-138.
- [27] Montgomery DC. *Design Analysis of Experiments*, 8<sup>th</sup> ed. John Wiley & Sons, New York, USA. 2013.
- [28] Hanafi I, Almansa E, Khamlichi A, Jabbouri A, Cabrera FM. Optimization of cutting conditions for sustainable machining of PEEK-CF0 using TiN tools. *Journal Cleaner Production*. 2012;33:1-9.
- [29] Anggoro PW, Bawono B, Jamari J, Bayuseno AP. Parameter Optimization of strategies at CNC Milling Rolland Modela MDX 40R CAM made insole shoe orthotic EVA foam. *International Journal of Mechatronic & Mechanical Engineering*. 2016; 6:96-106.
- [30] Asiltürk I, Nessel S. The multiresponse optimization of CNC turning parameters with Taguchi method-based response surface analysis. *Measurement*. 2012; 45:785–794.
- [31] Chabbi A, Mabrouki T, Yallese MA, Nouioua M, Meddour I. Modeling and optimization of turning process parameters during the cutting of polymer (POM C) based on RSM, ANN, and DF methods. *The International Journal of Advanced Manufacturing Technology*. 2017;91(issue 5-8):2267–2290.

- [32] Janisse DJ, Janisse EJ. Pedorthic and orthotic management of the diabetic foot. *Foot Ankle Clinic*. 2006;11:717-734.
- [33] Sait AN, Aravindan S, Haq AN. Optimization of machining parameters of glassfibre-reinforce plastics analysis using Taguchi technique. *International Journal Advanced Manufacturing Technology*. 2009;43:581-589.
- [34] Xavior MA, Adithan M. Determining the influence of cutting fluids on tool wear and surface roughness during turning of AISI 304 austenitic stainless steel. *Journal of Materials Processing Technology*. 2009;209:900-909.
- [35] Anggoro PW, Bawono B, Tauviquirrahman M, Jamari J, Bayuseno AP, Wicaksono A. Reverse innovative design of insole shoe orthotic for diabetic patients. *Journal of Engineering and Applied Sciences*. 2019; 14(1):106-113.